



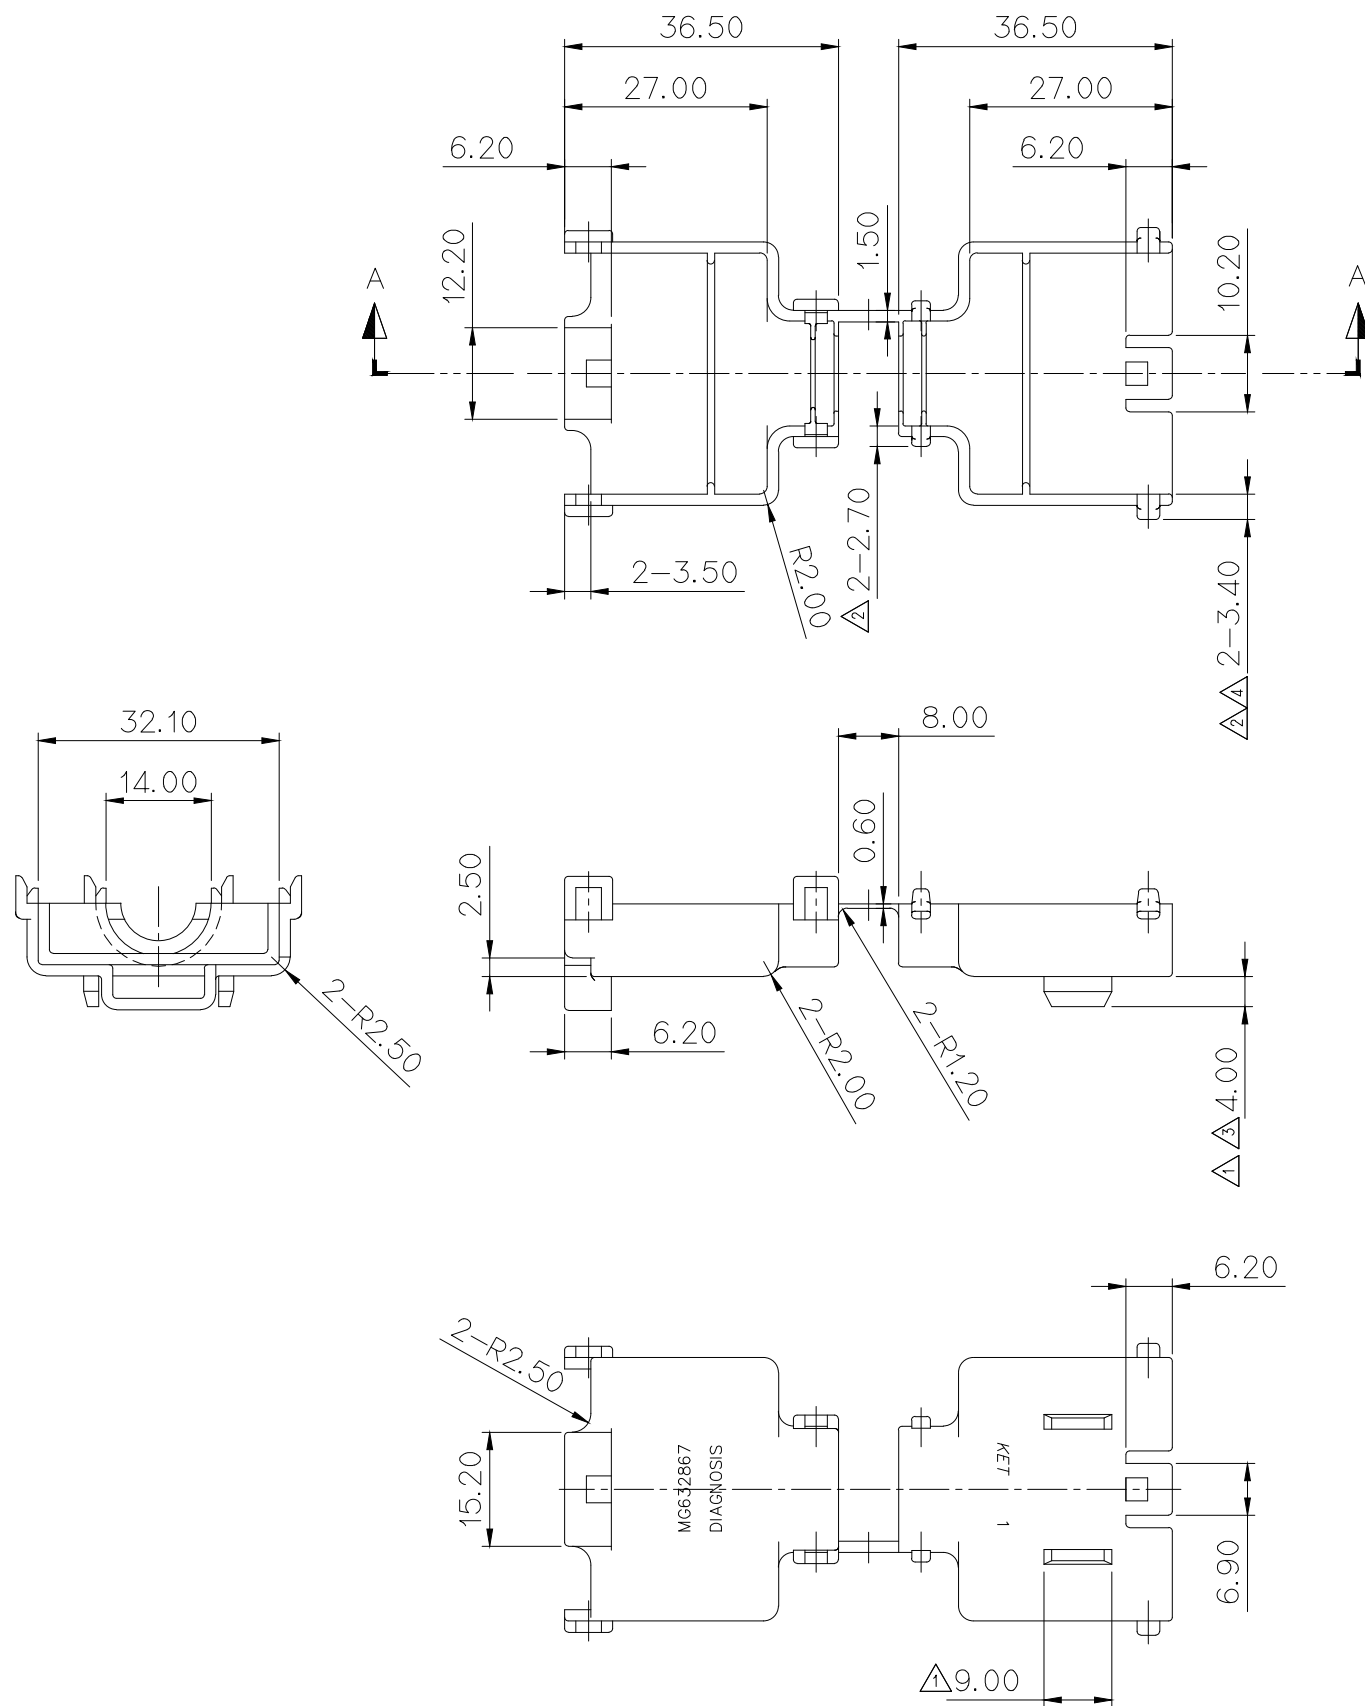

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

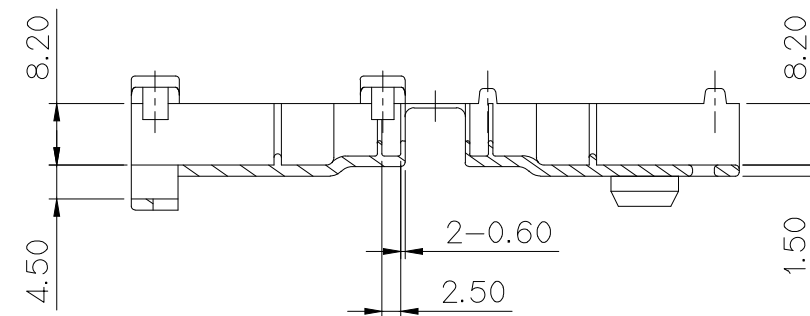

SECTION A-A

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG652863, MG652864
- APPLICABLE CORRUGATED TUBE : $\phi 9.0$
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG652863, MG652864
- 적용 CORRUGATED TUBE : $\phi 9.0$
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MAP

						MATERIAL		NYLON66				KOREA ELECTRIC					
						FINISH		BLACK				TERMINAL CO., LTD					
4 ECO-1207-562 근거 형상 변경 CKY '12.07.25		3 설계사양변경(S110124)근거 형상 변경 SHS '11.04.26		2 설계사양변경(S080037)근거 도면 재작성 CDH '08.03.04		1 설계사양변경(S070205)근거 도면 재작성 (이탈방지용 GUIDE 추가) KBS '07.09.17		WIRE RANGE		CLASS							
LTR		REVISION RECORD		DR.		CHK.		APP.		DATE		TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1		PART NO. MG632867	
DR.		HSW '03.01.13		CHK.						1/14		PART NAME					
				APP.						1/14		DIAGNOSIS 20P REAR COVER					