
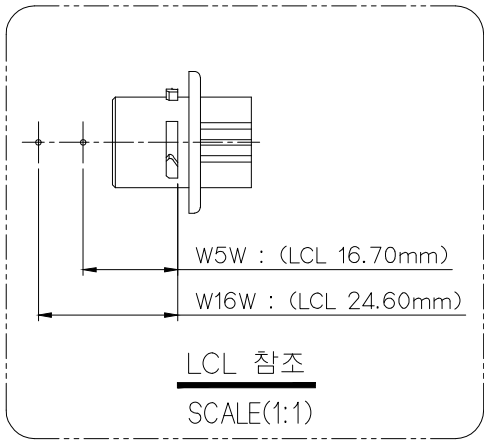

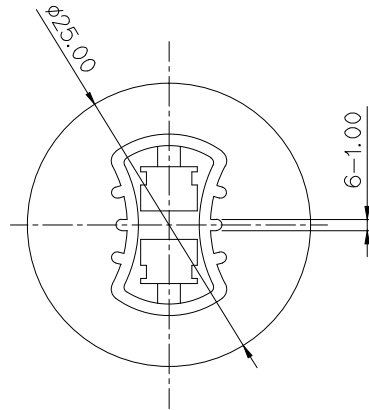
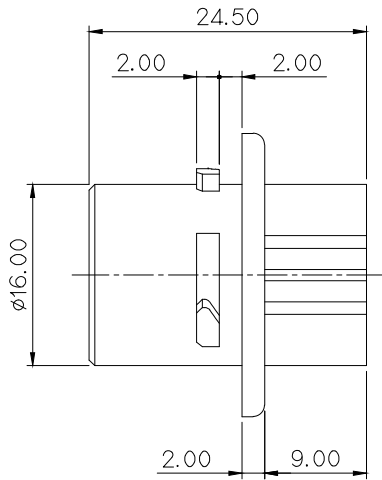
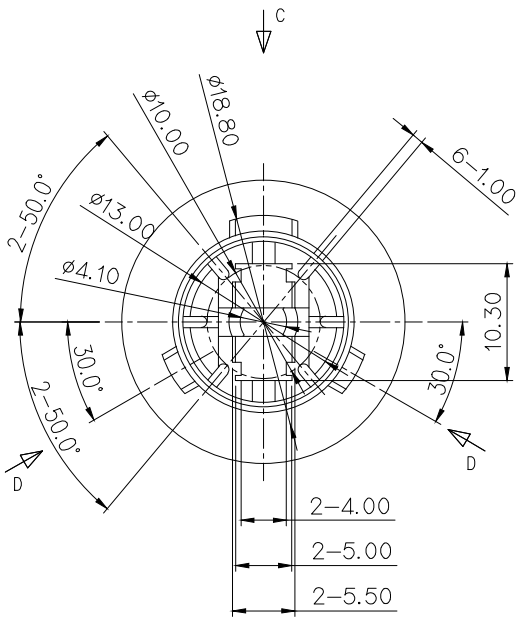
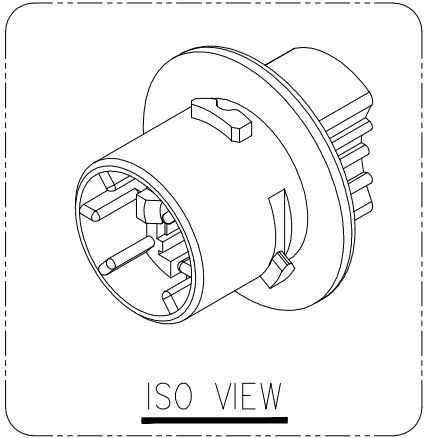

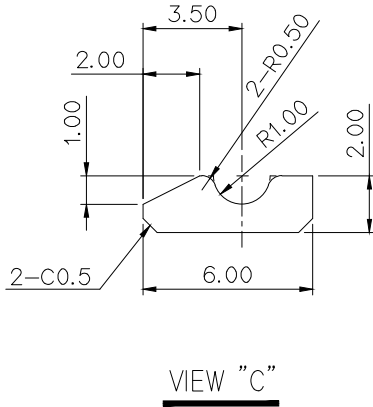


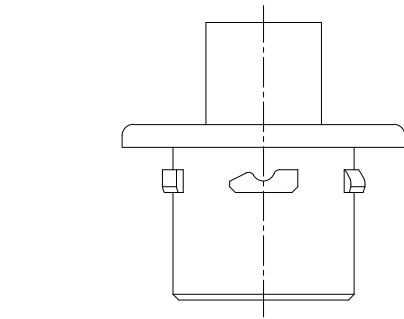

주 기

- 1.지시하지 않은 반경 R은 0.5 로 한다
- 2.지시하지 않은 모파기 C는 0.5로 한다
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 TERMINAL: ST730932
- 5.KET 문자 : 기울기 15°(H; 0.1~0.2, SIZE; 1.5)
CAVITY NO.: 기울기 0°(H; 0.1~0.2, SIZE; 1.5)
LOCK MARK : SIZE 2.0 H; 0.2
⇒ MARK : H; 0.2

NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
- 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
- 3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 4. APPLICABLE TERMINAL :ST730932
- 5. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 1.5)
LOCK MARK : SIZE 2.0 H; 0.2
⇒ MARK : H; 0.2

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

						MATERIAL		NYLON 66		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		NATURAL			
						WIRE RANGE		CLASS			
						INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.
DR.	BIN, '03.11.19		CHK.		KKJ, '03.11.20					2/1	MG633043
CHK.			APP.		KCH, '03.11.20		PART NAME		HMSL BULB HOLDER HOUSING		