

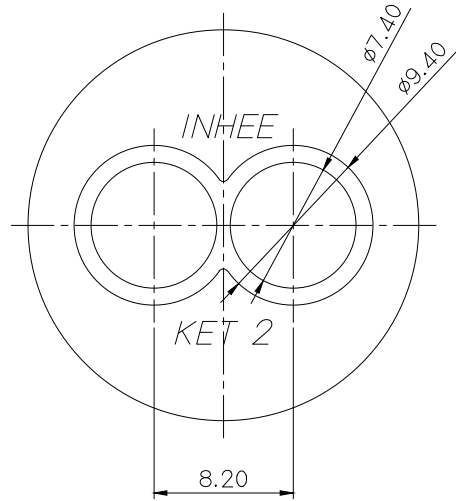
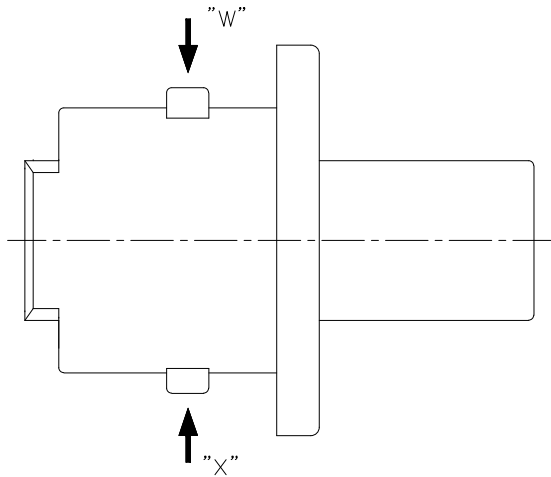
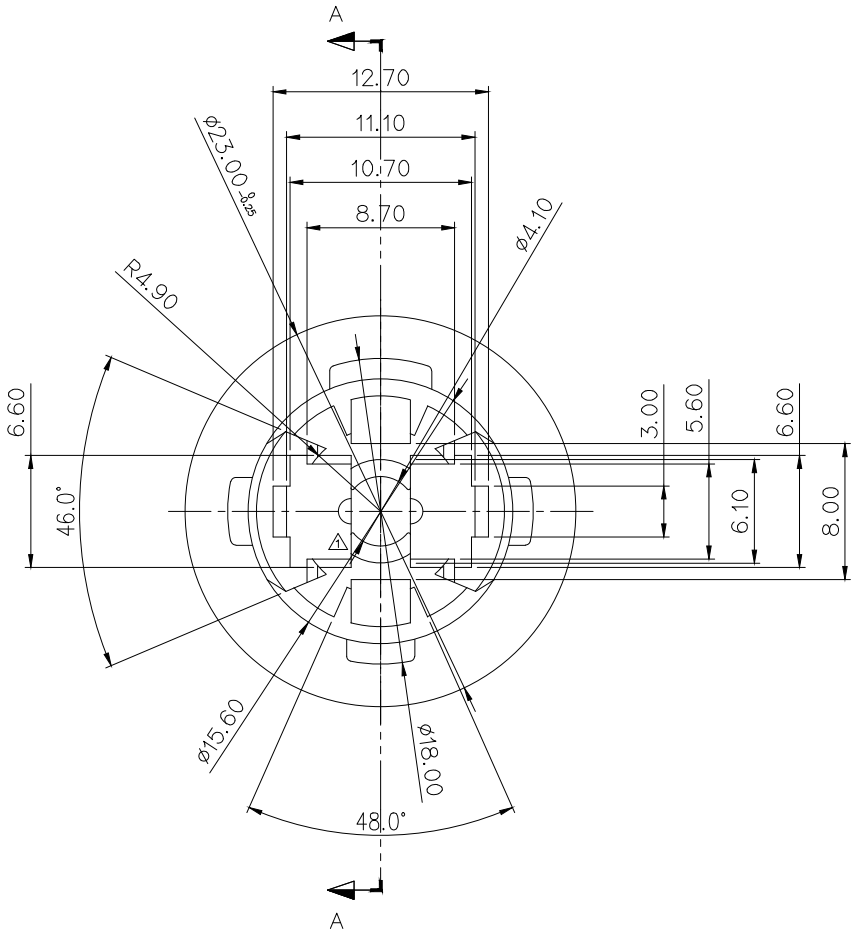



GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

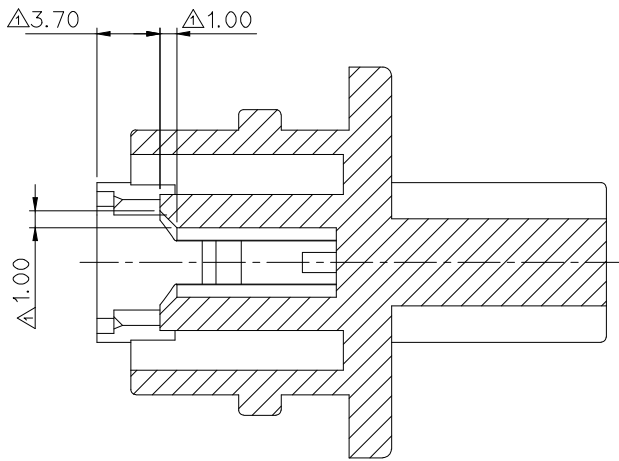


NO.	MATERIAL	COLOR
0	PA66 + MR30%	NATURAL
1		RED
2		BLUE
3		YELLOW
* 4		GRAY
40		D/GRAY
41		L/GRAY
* 5		BLACK
6		W/GREEN
7		BROWN
8		GREEN
9		MAGENTA

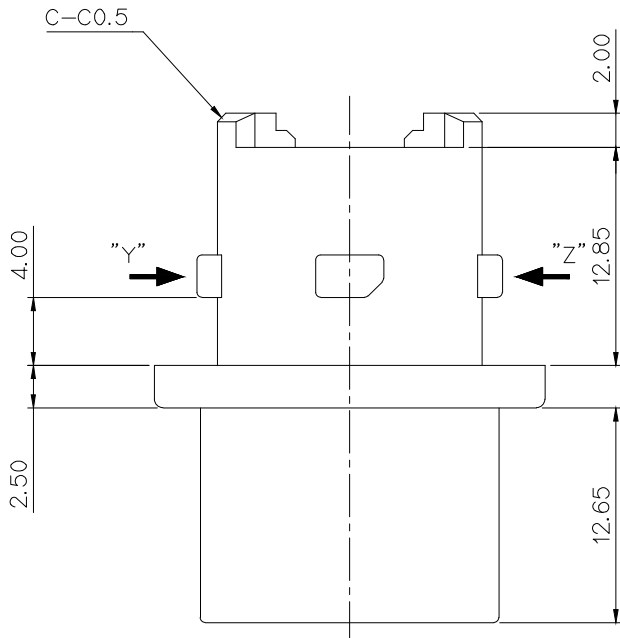

SECT A-A

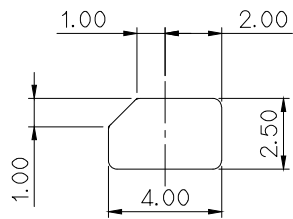

VIEW "X,Y,Z"
(S= 5/1)

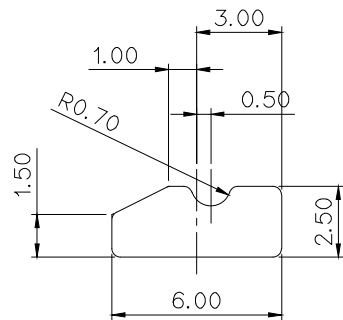

VIEW "W"
(S= 5/1)

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 TERMINAL : ST780915
- 5.적용 WIRE SEAL : MG682027

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE OF TERMINAL : ST780915
5. APPLICABLE OF WIRE SEAL : MG682027

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

21657

DIE NO

ISSUE MARK

						MATERIAL PA66 + MR30%		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH L/GRAY			
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 3/1	PART NO. MG633053
DR. HSW, '05.09.03			CHK. KKJ, '03.04.24			PART NAME			
CHK.			APP. [Signature]			BACK-UP BULB HOLDER WP "B"			