

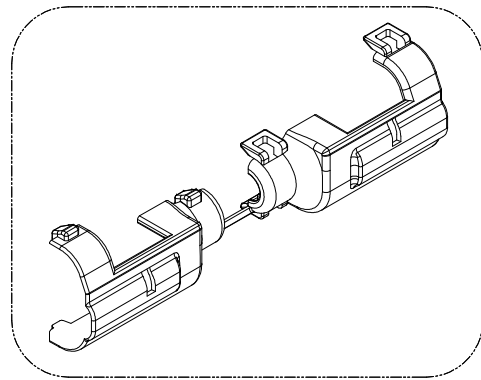
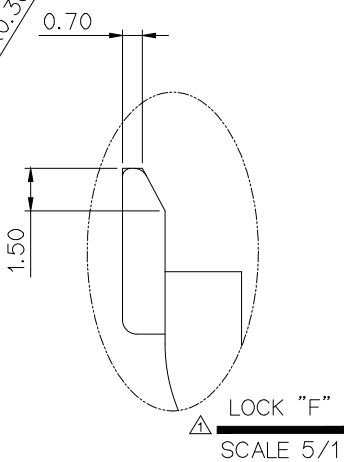
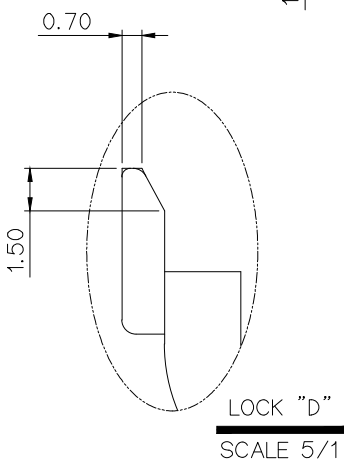
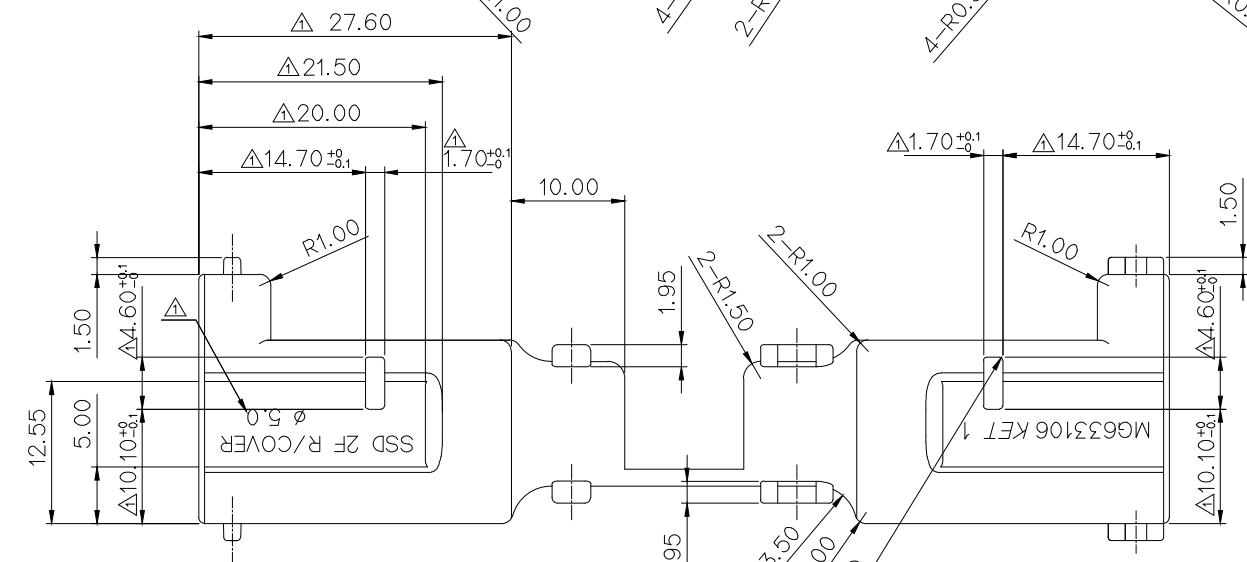
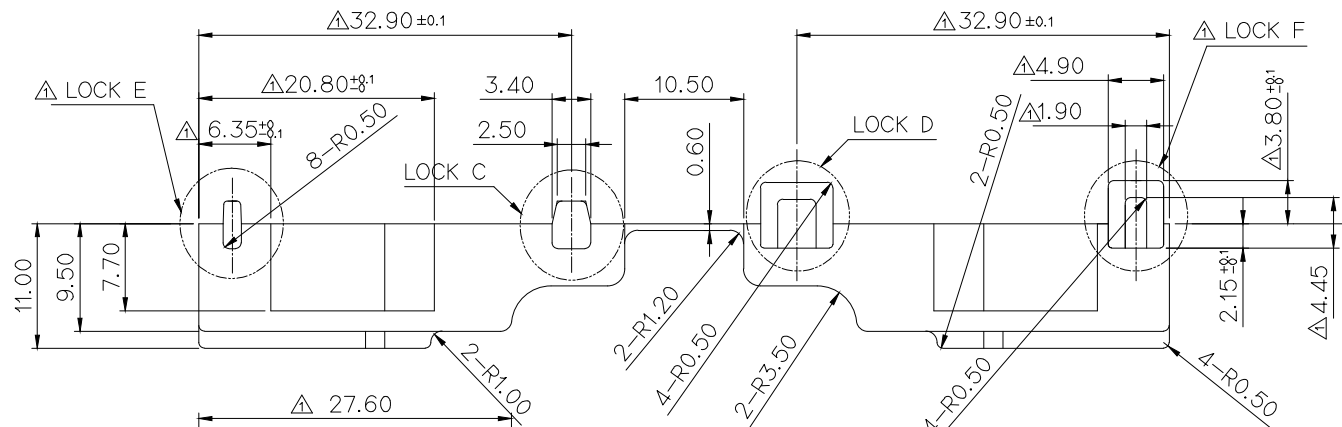
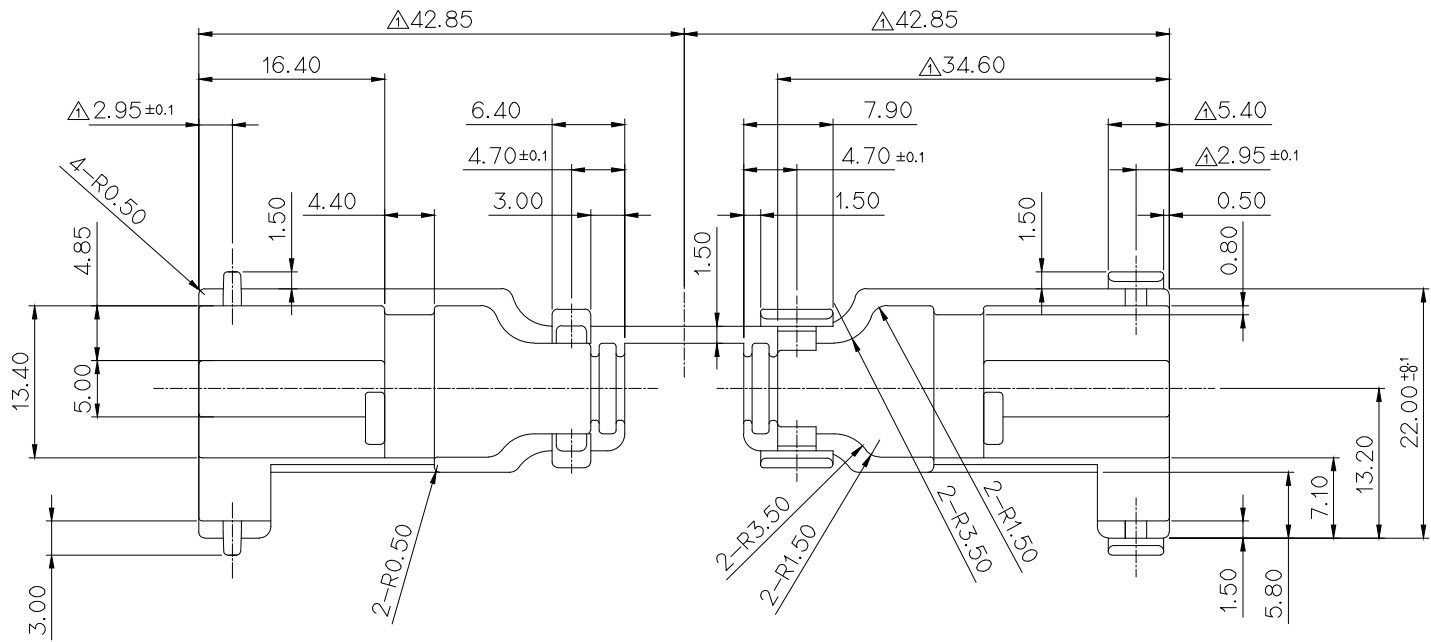
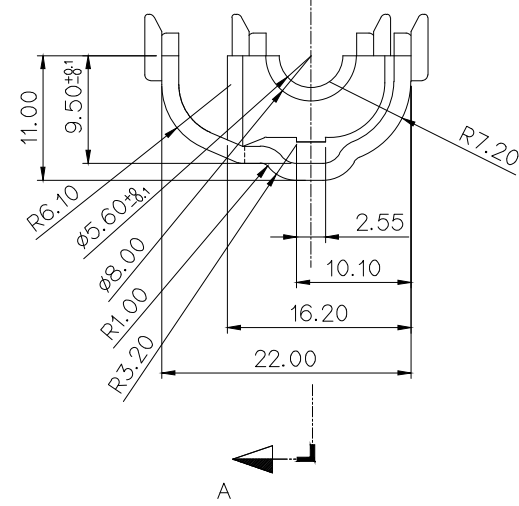
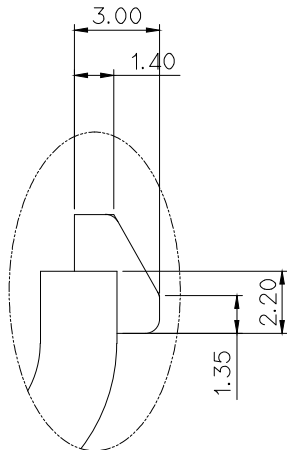


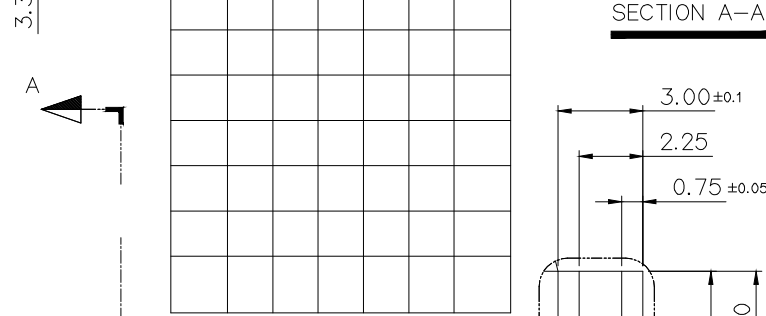


GENERAL TOLERANCE (HOUSING)								USED ON
	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
Ⓐ	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	
C	±0.3	±0.5	±0.8	±1.4	±2.0	±30'	0.15	

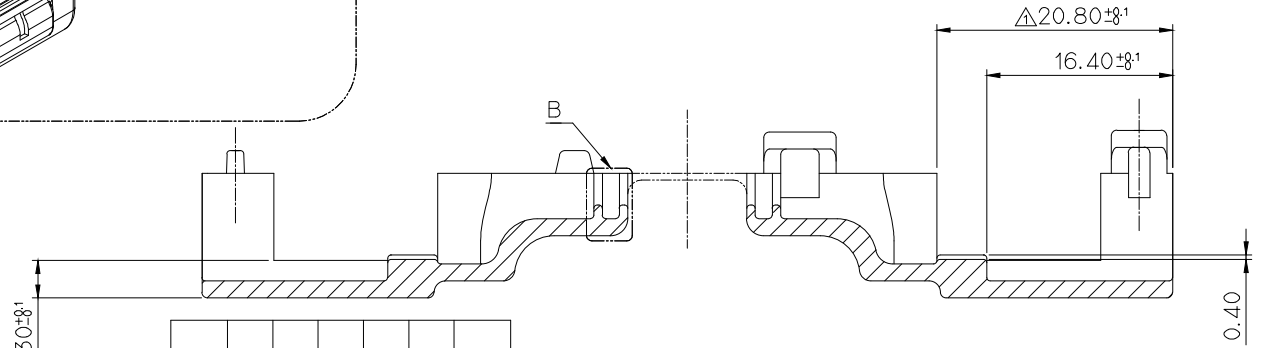

DETAIL "B"
SCALE 5/1

LOCK "C"
SCALE 5/1

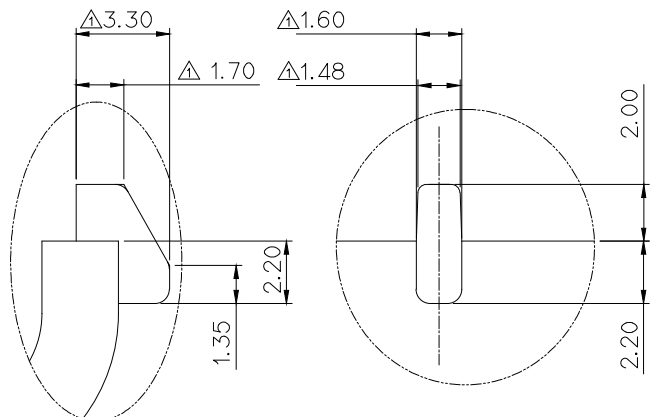

LOCK "E"
SCALE 5/1

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE REC. HOUSING : MG640707
- APPLICABLE CORRUGATED TUBE : ø5.0
- KET MARK(凸) : TAPER 15° (H; 0.1~0.2, SIZE; 2.0)
CAVITY NO,P/NO,P/NA (凸) : TAPER 0°(H; 0.1~0.2, SIZE; 2.0)
- PATTERN TYPE : KDP-6A

주 기

- 지시하지 않은 반경 R은 0.3로 한다
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 REC HOUSING : MG640707
- 적용 CORRUGATED TUBE : ø5.0
- KET 문자(凸) : 기울기 15°(H; 0.1~0.2, SIZE; 2.0)
CAVITY NO.품번및 품명(凸): 기울기 0°(H; 0.1~0.2, SIZE; 2.0)
- 부식사양 : KDP-6A

NO.	MATERIAL	COLOR
0	Ⓣ NYLON66: ΔA217	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

* DIMENSIONS IN MM

						MATERIAL SEE TABLE		FINISH SEE TABLE		WIRE RANGE		INSULATION		TOLERANCE EXCEPT AS NOTED		SCALE 2/1		PART NO. MG633106		PART NAME Δ SSD 2F HOUSING REAR COVER	
DR. CCW '03.06.18		CHK. '03.06.25		APP. '03.06.20																	
CHK.		APP.																			



DIE NO. 2A786

ISSUE MARK

CLASS SSD

TYPE

PART NO. MG633106

PART NAME Δ SSD 2F HOUSING REAR COVER

DESIGN REVISION NO. 2