





GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE


1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REC. HOUSING : MG642605
3. APPLICABLE CORRUGATED TUBE : ø5.0
- △ 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 REC HOUSING : MG642605
- 3.적용 CORRUGATED: ø5.0
- △ 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

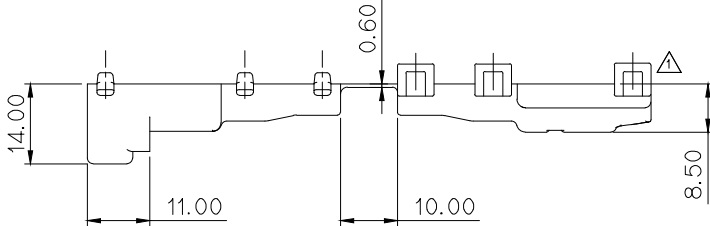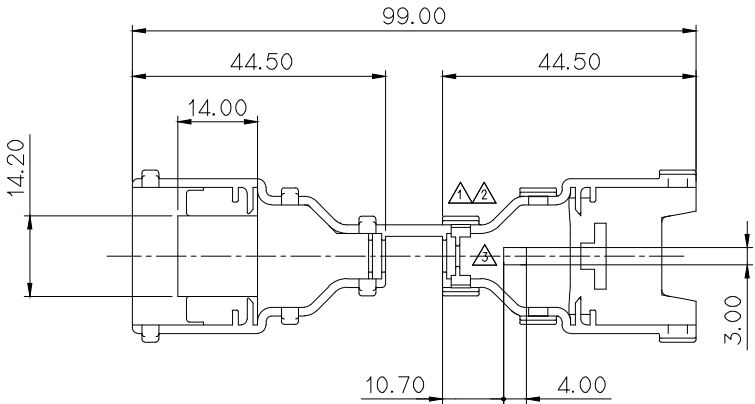

△ NO.	MATERIAL	COLOR
0	NYLON66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

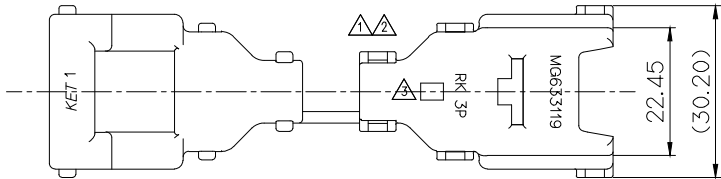

						MATERIAL	△SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
△	ECO-1503-019 근거 도면 변경 (배상 TABLE 추가)	YSS	CKY	LSY	'16.03.02	FINISH	△SEE TABLE	
△	ECO-1506-279 근거 재작성 (REAR HOLDER 육안 식별 HOLE 추가)	YSS	CKY	LSY	'15.06.16	WIRE RANGE		
△	ECO-1502-116 근거 도면 재작성 (LOCK 외측 R변경)	KCS	HYJ	LSY	'15.02.09	INSULATION		
△	ECO-1501-054 근거 도면 재작성 (LOCK 파손관련 내/외측 R 보강)	KCS	JSY	LSY	'15.01.09			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG633119
DR.	KYM 04.03.17	CHK.				PART NAME		
CHK.	KKJ 3/22	APP.	KCH 3/23			RK 3P REC. R/COVER (03FB)		

APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.