
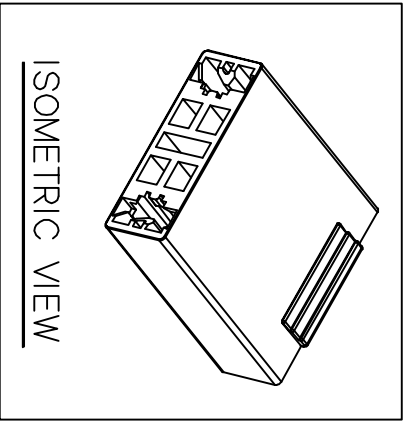
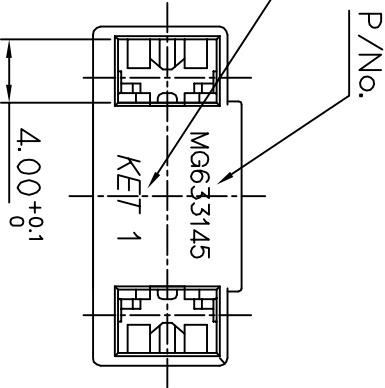
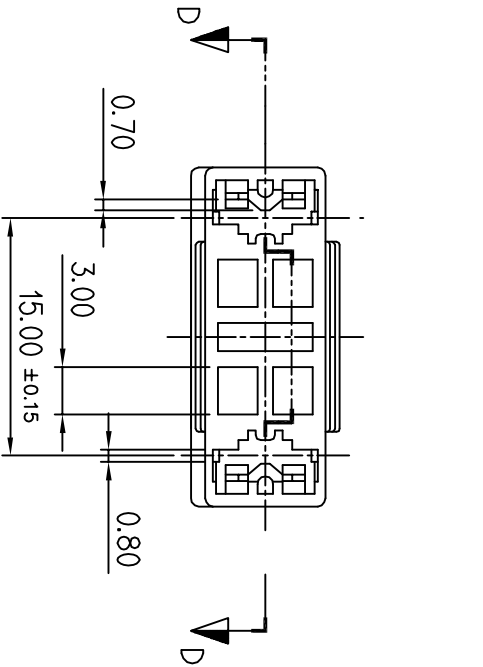


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730567, 568, 569
3. HOUSING ETCHING SPEC : KDP-6A
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.

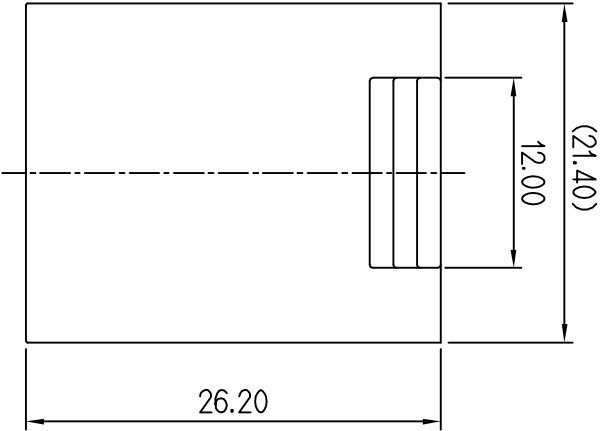

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

					MATERIAL		PA66(V2)	KIET KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.
					FINISH		SEE TABLE	
					WIRE RANGE		CLASS	.187
					INSULATION		TYPE	GLOVE S/W
①	설치시생반경(SH0728)크기 도면 제작성				정확함	정확함		
LTR	REVISION RECORD			DR. CHK.	APP.	DATE		
DR.HAK.'2004.03.16				CHK.				
CHK.		APP.						
PART NAME				TOLERANCE EXCEPT AS NOTED		SCALE		PART NO.
187 P-LOCK 2P HS'G				SEE TABLE		2/1		MG 633145