
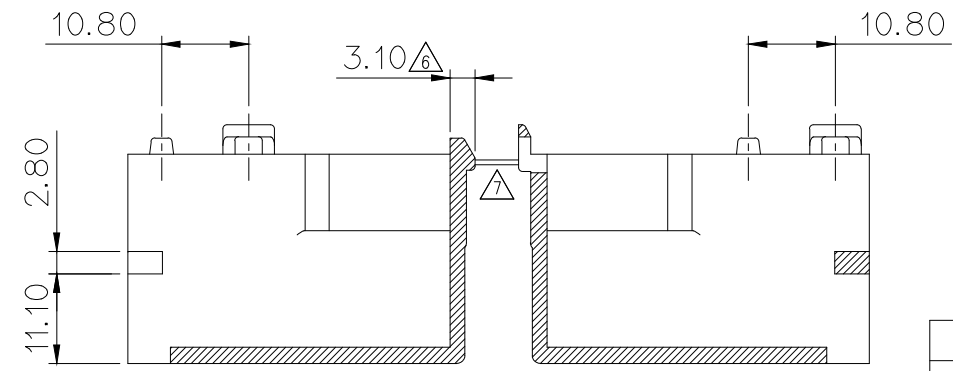
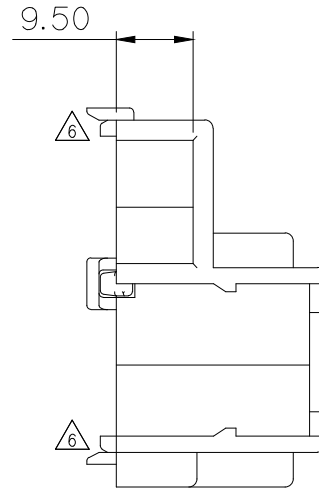
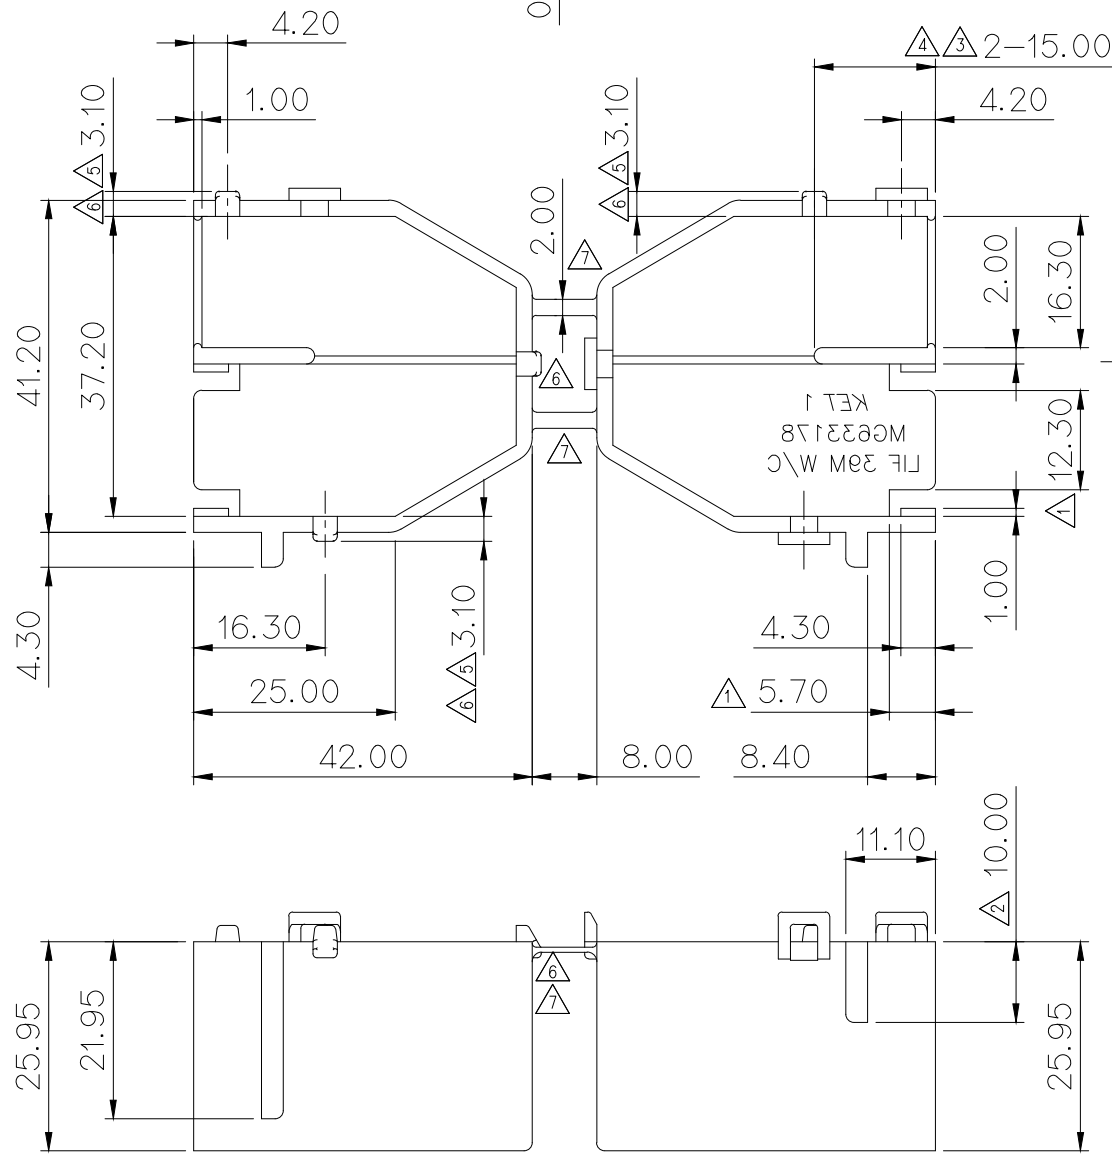



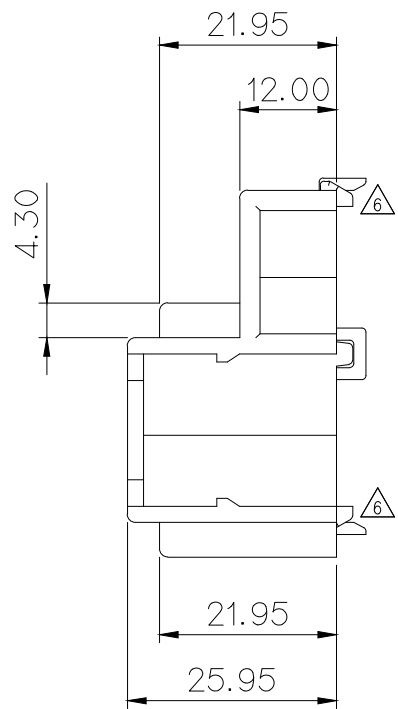

SECTION A-A

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

- NOTE**
- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - 2. APPLICABLE REC. HOUSING : MG643206
 - 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

- 주 기**
- 1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 2. 적용 HOUSING : MG643206
 - 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

					5 설계사양변경(S080039)근거 도면 재작성 (LOCKING부 형상변경) CDH ---- ---- 2008.03.04			MATERIAL			NYLON66		KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.											
					4 설계사양변경(S060322)근거 도면 재작성 (WIRE 간섭부 형상변경) KBS ---- ---- 2006.12.05			FINISH		BLACK														
					3 설계사양변경(S060194)근거 도면 재작성 (WIRE 간섭부 형상변경) KBS ---- ---- 2006.07.12			WIRE RANGE			CLASS													
					2 오조립 방지 형상 변경 KDJ ---- ---- 2004.06.09			INSULATION			TYPE													
					1 치수 변경 KDJ ---- ---- 2004.05.24																			
					LTR			REVISION RECORD			DR.		CHK.		APP.		DATE		TOLERANCE EXCEPT AS NOTED		SCALE		PART NO.	
																			SEE TABLE		1/1		MG633178	