
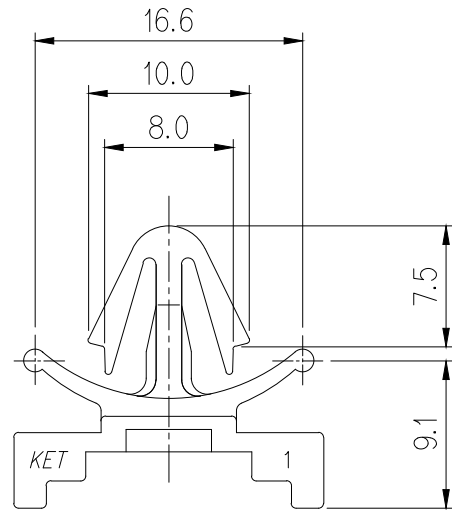
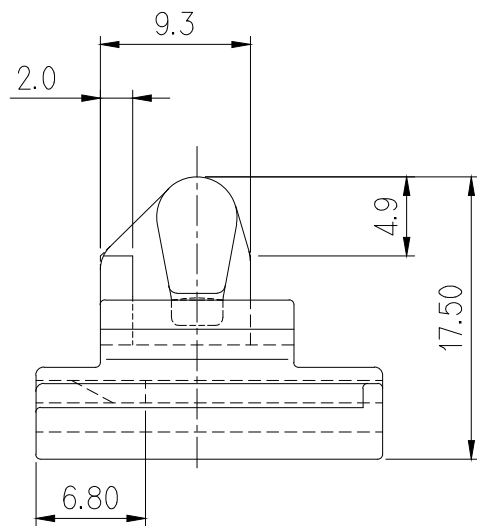
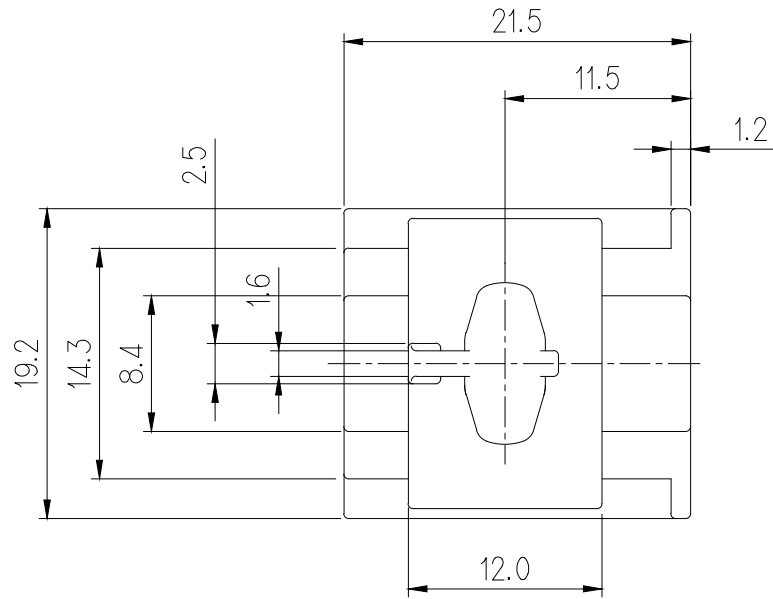
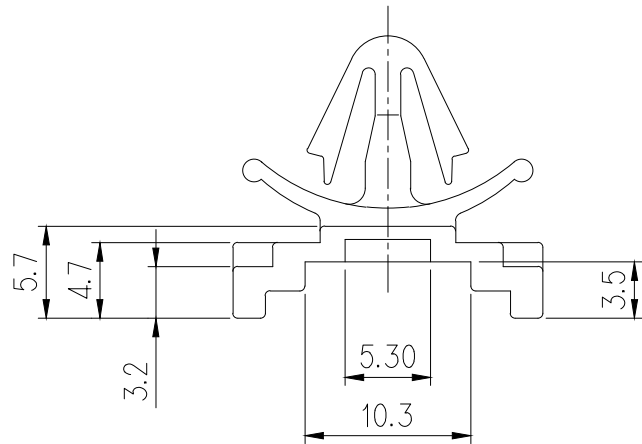


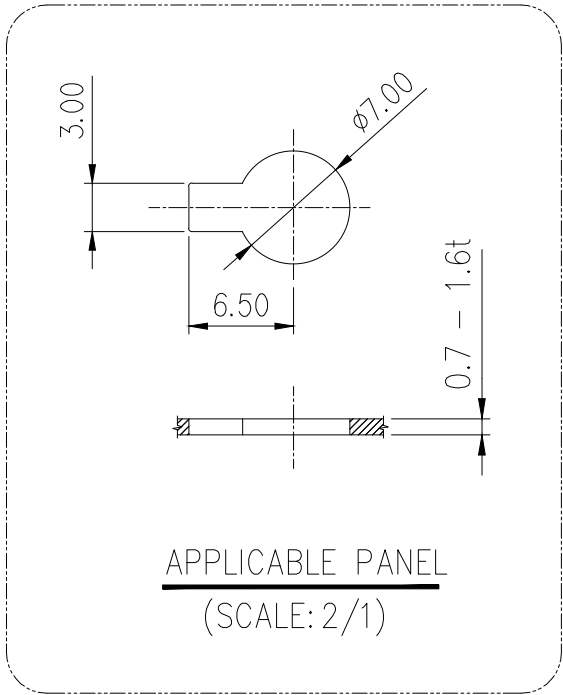

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1. 지시하지 않은 반경 R은 0.3로 한다
- 2. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3. 적용 HS'G : 090B,2507,1809 CONN'T

NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- 2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 3. APPLICABLE HOUSING :090B,2507,1809 CONN'T

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

					MATERIAL		NYLON66	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH		NATURAL			
					WIRE RANGE		CLASS			
					INSULATION		TYPE		MODULE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG633195
DR. HEO S.H 04.6.9			CHK.			PART NAME				
CHK.			APP.			MODULE CLIP(ø7 KEY HOLE)				