
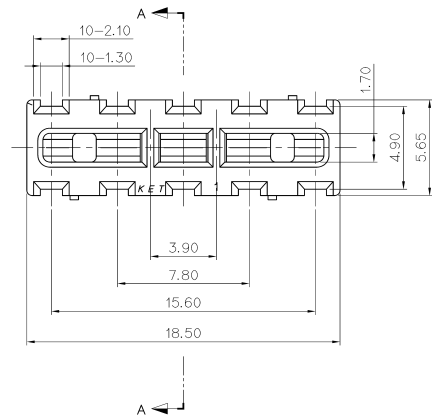



SECTION A-A



GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

주 기

1. 기능상 유해한 BURR 및 미성형 등이 없을것.
2. 적용 HOUSING : MG613239

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG613239



				MATERIAL	PBT HV1005S	KET KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	NATURAL	
				WIRE RANGE		CLASS
				INSULATION		TYPE 7158-4889
LTR	REVISION RECORD	DR	CHK	APP.	DATE	PART NO. MG633240
DR.	KBS 2007.01.23	CHK.				
CHK.		APP.				
				PART NAME	RK 10F FRONT HOLDER(RK10FGY)	