

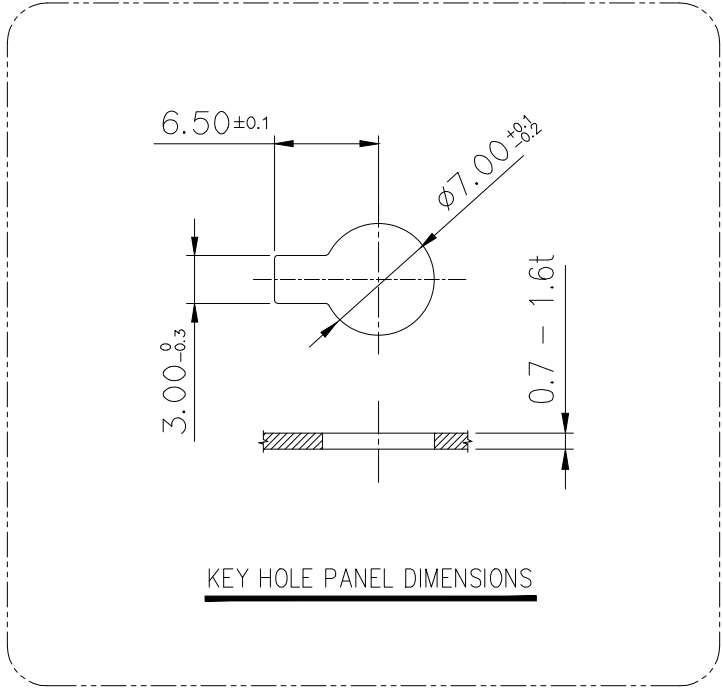
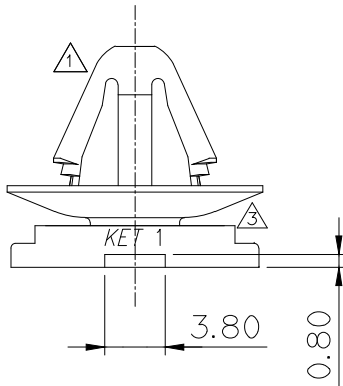
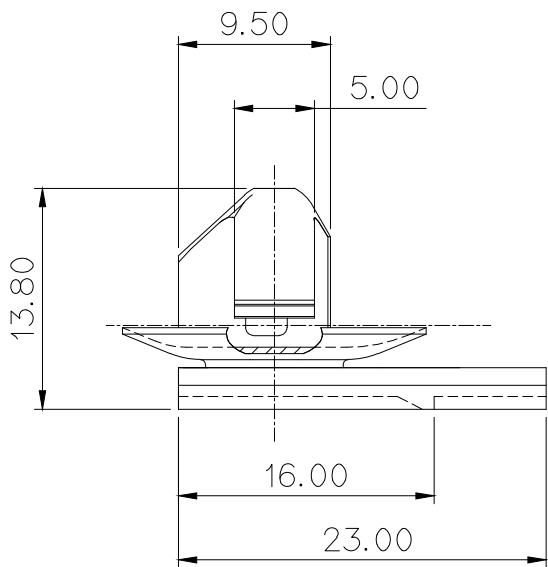


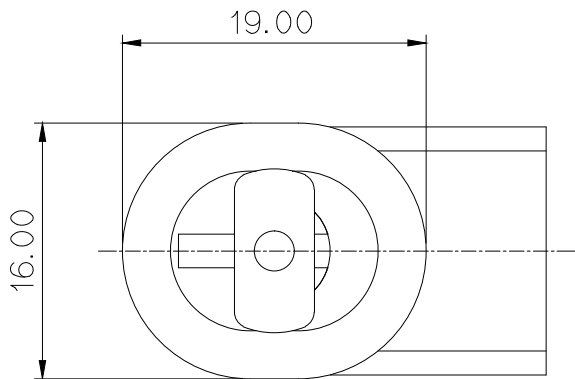

KEY HOLE PANEL DIMENSIONS

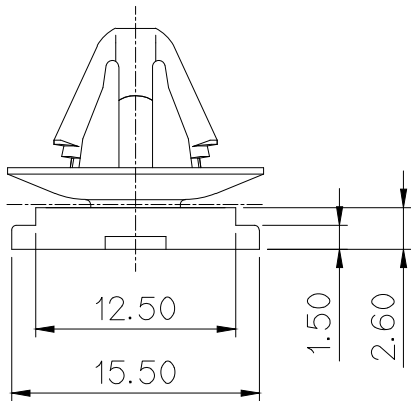

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1.MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.

2.APPLICABLE HOUSING : 375 CONNECTOR.

⚠ 3.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
* 0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
⚠ * 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS 375

TYPE

PART NO. MG633294

⚠ MG633294-5

- 주 기
- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
 - 적용 HOUSING : 375 CONNECTOR.
 - ⚠ 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
⚠ 3	ECO-1604-149 근거 도면 변경 (핀넬 장착 부 실 제거 및 폭 축소)	YSS	CKY	LSY	16.04.13			
⚠ 2	ECO-1603-098 근거 도면 재작성 고객 요청에 의한 색상 추가(BLACK)	AYT	SSH	SUK	16.03.09			
⚠ 1	설계시양변경(S080192)근거 재작성 (LOCK부 실보강)	KMH			08.08.07			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG633294
DR.	KDJ 2004.04.01	CHK.				SEE TABLE		⚠ MG633294-5
CHK.		APP.				PART NAME	375 CLIP (ø7 KEY HOLE TYPE)	