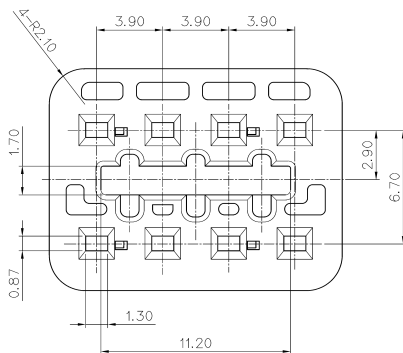



SECTION A-A'


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 지시없는 R는 전부0.3으로 한다.
2. 기능상 유해한 BURR,변형등이 없을것.
3. 적용 부품 : MG643380, MG643383

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3
2. MUST BE FREE OF BURR,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE PART : MG643380, MG643383

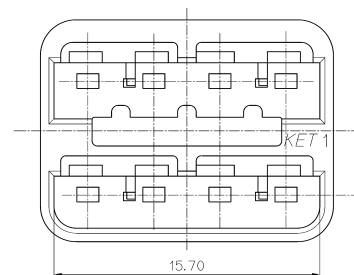

ISSUE MARK

				MATERIAL	PBT	KET (KOREA ELECTRIC TERMINAL CO., LTD.)
				FINISH	NATURAL	
				WIRE RANGE		CLASS 040 WP
				INSULATION		TYPE
LTR	REVISION RECORD	DR	CHK	APP.	DATE	PART NO. MG633382
DR	KYM 2004.08.09	CHK				
CHK	08.16	APP.				
				PART NAME RK 8P FRONT HOLDER		