

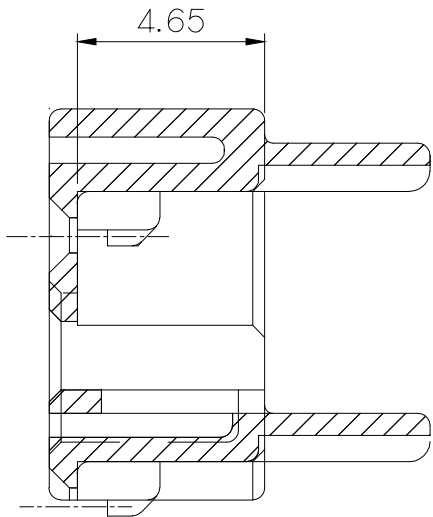
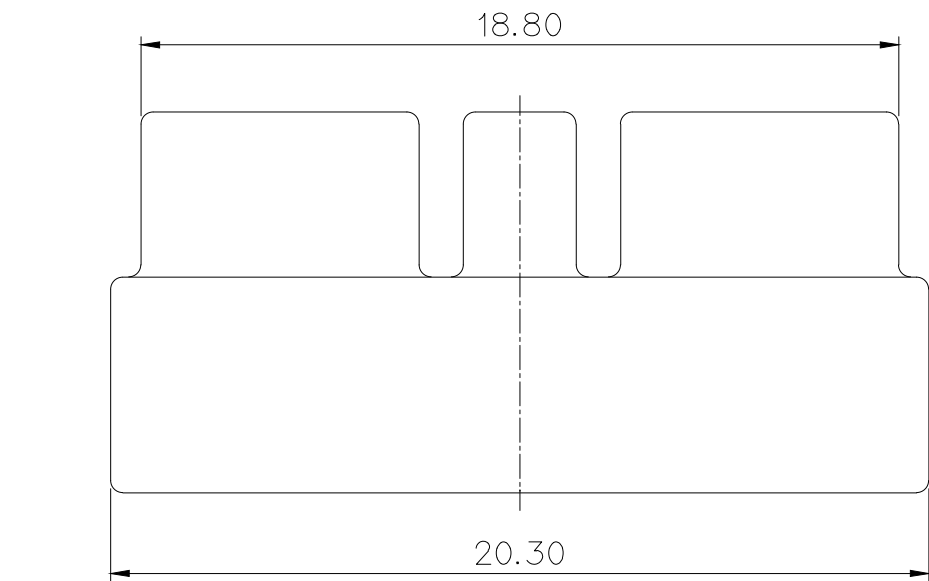
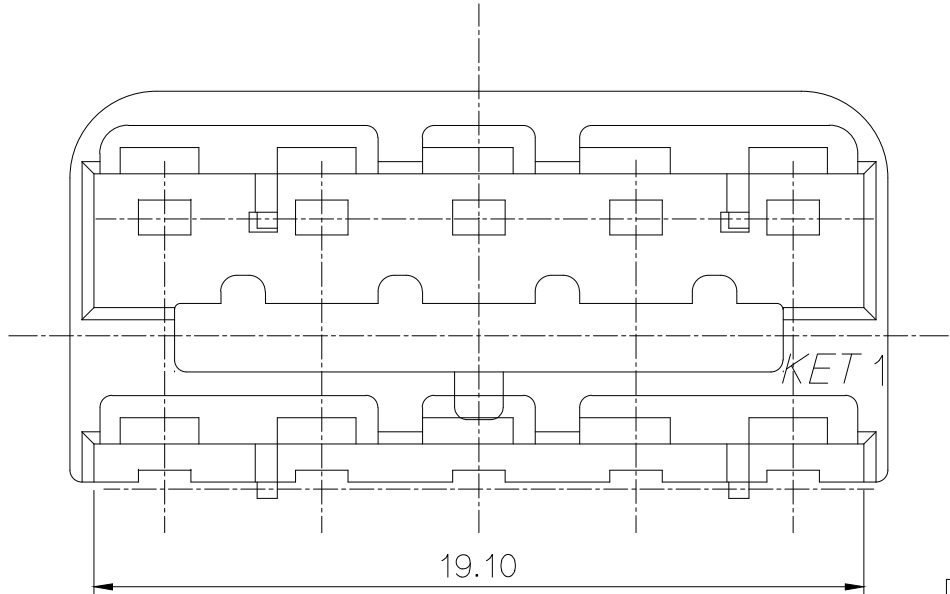


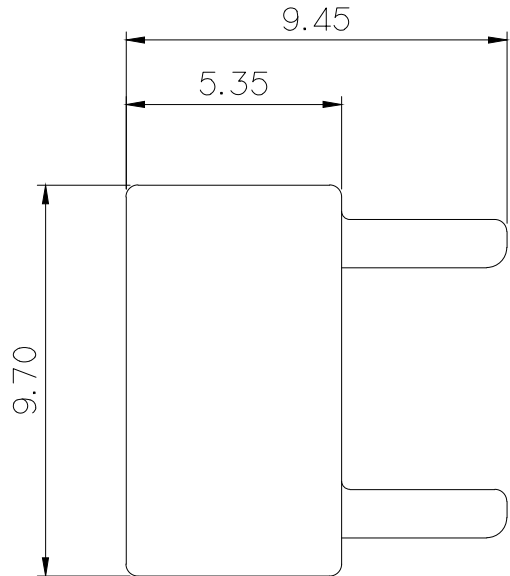

SECTION A-A'

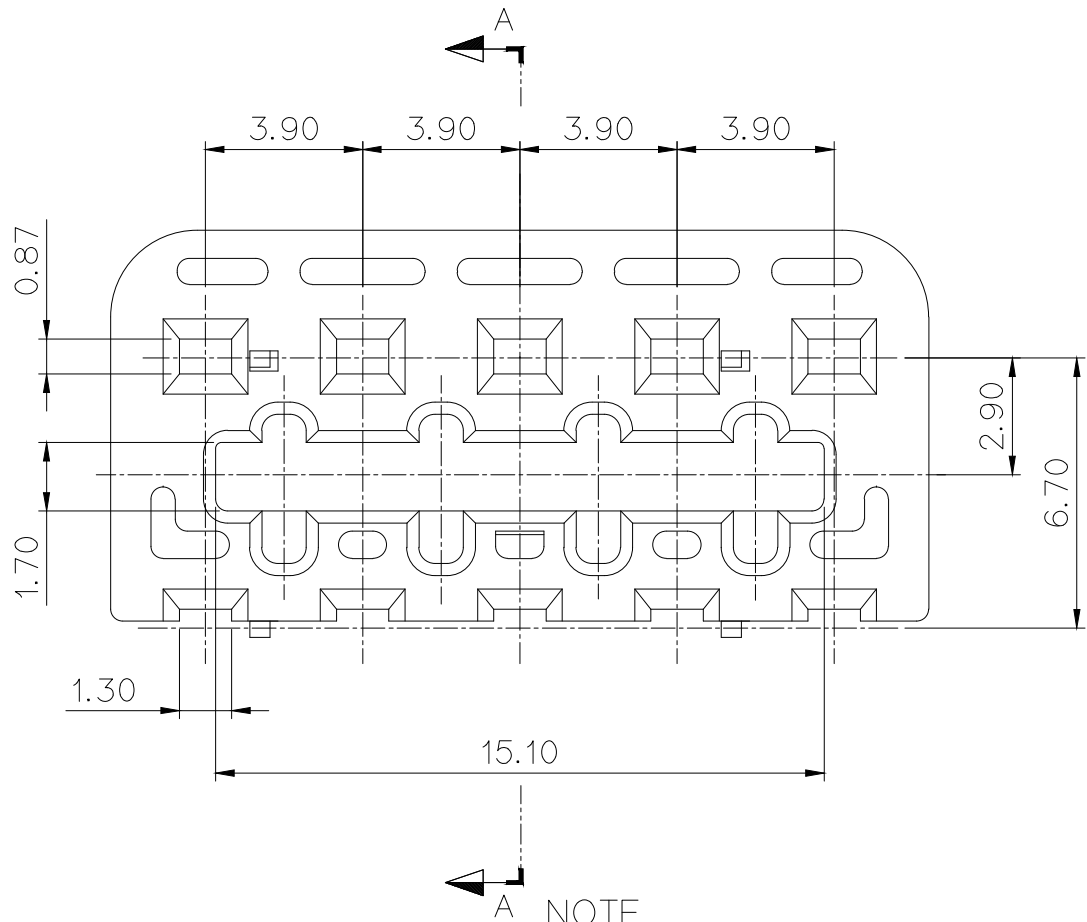

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시없는 R는 전부0.3으로 한다.
- 기능상 유해한 BURR,변형등이 없을것.
- 적용 부품 : MG643385
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE PART : MG643385
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL PBT		 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH NATURAL				
						WIRE RANGE		CLASS 040 WP		
						INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG633387
DR.	KYM	2004.08.09	CHK.				PART NAME			
CHK.	KKJ	08.16	APP.			08.16	RK 10P F/HOLDER			