


NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
5. APPLICABLE OF TERMINAL ST760521-1(P), ST760795-1(E)
6. APPLICABLE OF SEAL GASKET : R600104
7. APPLICABLE OF WIRE SEAL : MG682028

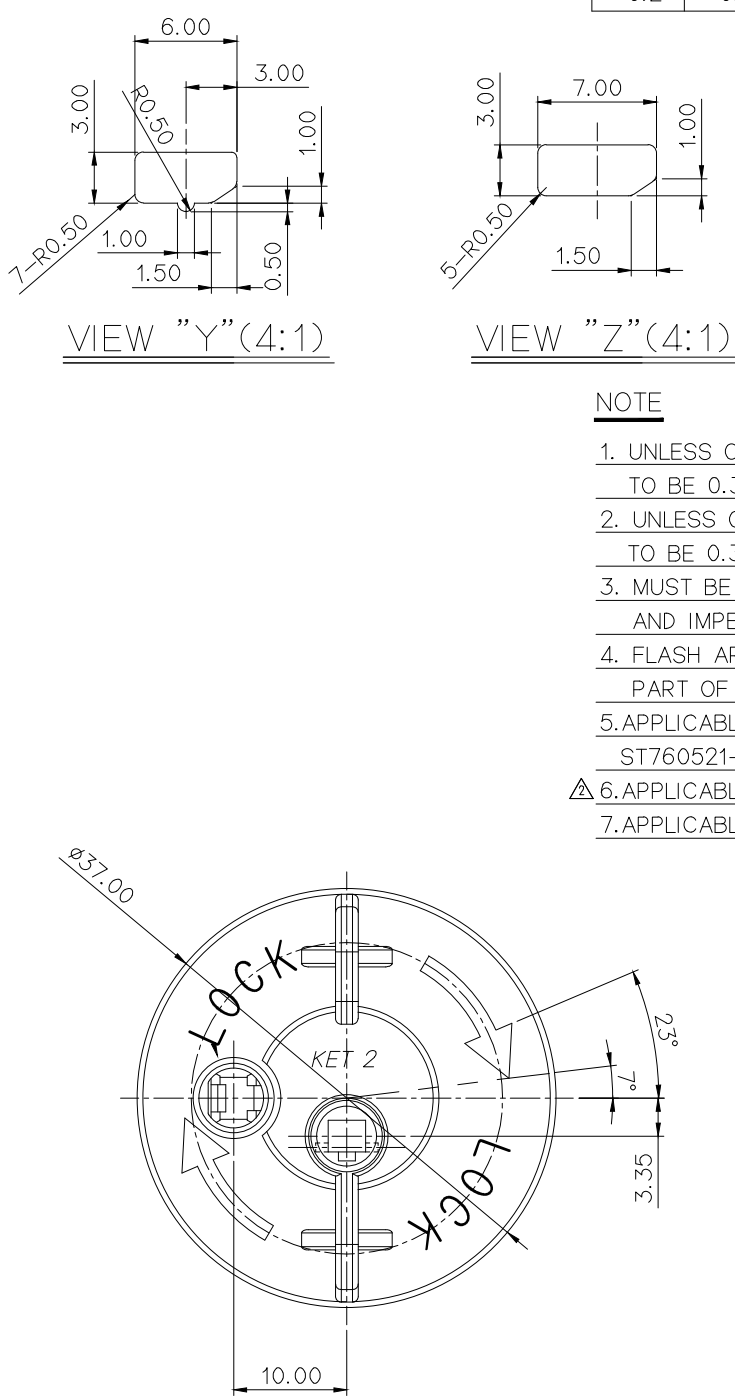

		
NO.	MATERIAL	COLOR
0	PA66 + MR30%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
* 41		LIGHT GRAY
5		BLACK
6		DARK GREEN
* 7		BROWN
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

- 1.지시하지 않은 반영 R은 0.3 로 한다
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
- 5.적용 TERMINAL : ST760521-1(P), ST760795-1(E)
- △ 6.적용 SEAL GASKET : R600104
- 7.적용 WIRE SEAL : MG682028

						MATERIAL		SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
	ECO-1506-266 근거 도면 재작성	SSY	CST	LSY	'15.06.15	WIRE RANGE			CLASS	
	ECO-1505-166 근거 도면 재작성	SSY	SSH	BIN	'15.05.18	INSULATION			TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG633404
DR.	BIN, '04.06.02		CHK.			PART NAME				
CHK.	APP.					RCL B/H WP SINGLE (F:45~150°)				