

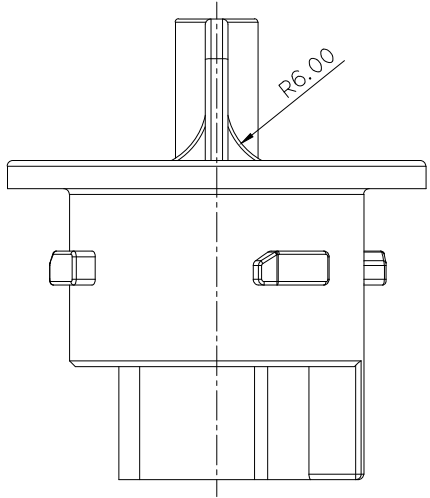



VIEW "W"(4:1)

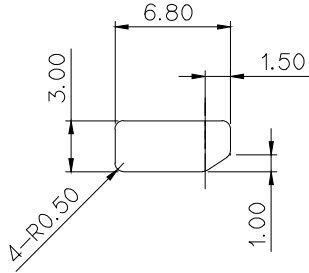

VIEW "X"(4:1)

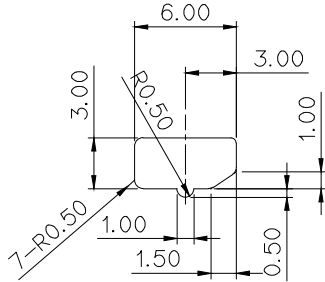




VIEW "Y"(4:1)

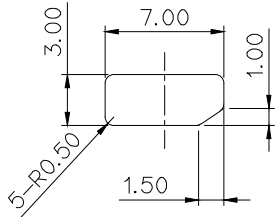


VIEW "Z"(4:1)

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
5. APPLICABLE OF TERMINAL ST760521-1(P), ST760795-1(E)
- △ 6. APPLICABLE OF SEAL GASKET : R600104
7. APPLICABLE OF WIRE SEAL : MG682028

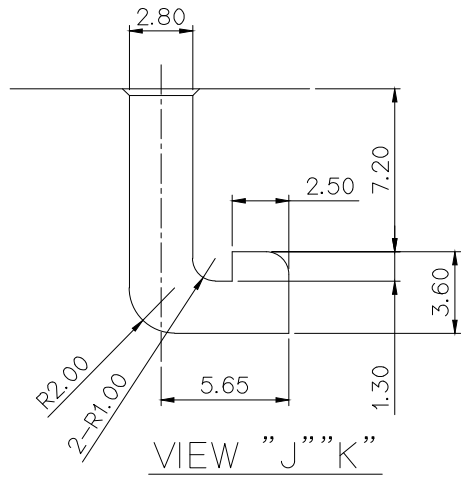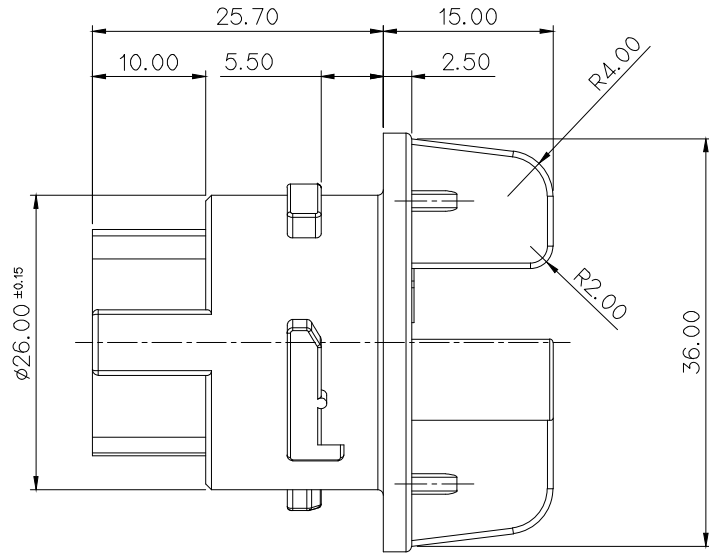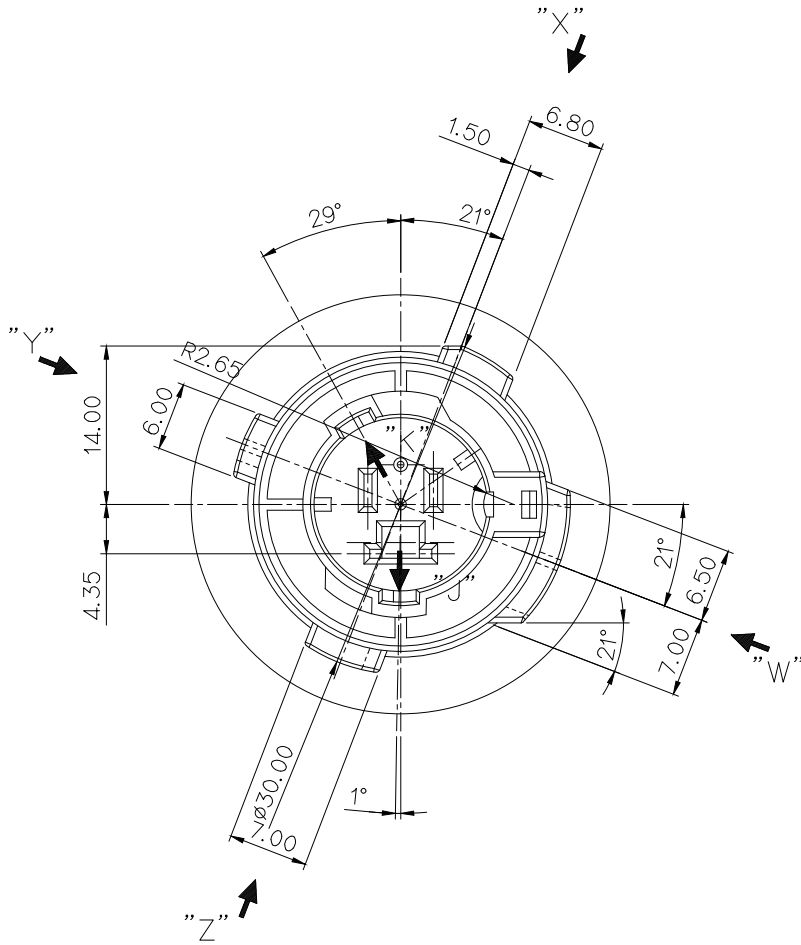

VIEW "J" "K"

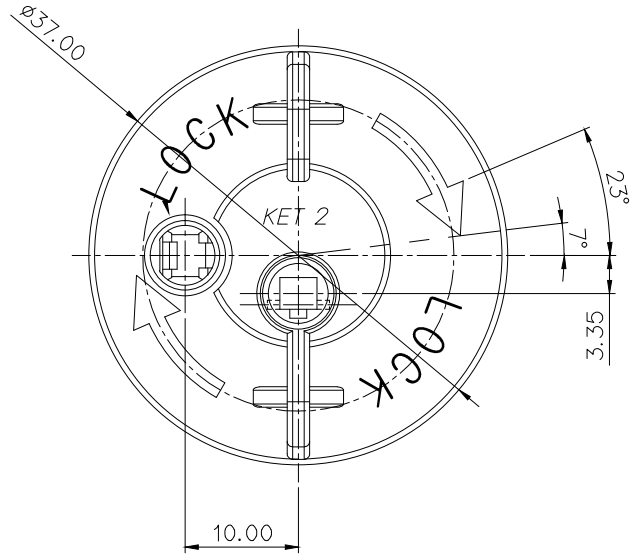

주 기

1. 지시하지 않은 반경 R은 0.3 로 한다
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
5. 적용 TERMINAL : ST760521-1(P), ST760795-1(E)
- △ 6. 적용 SEAL GASKET : R600104
7. 적용 WIRE SEAL : MG682028

NO.	MATERIAL	COLOR
0	PA66 + MR30%	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
40		D/GRAY
* 41		L/GRAY
5		BLACK
6		W/GREEN
* 7		BROWN
8		GREEN
9		MAGENTA

				MATERIAL		SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH		SEE TABLE	
				WIRE RANGE			CLASS
				INSULATION			TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO. MG633404
DR. BIN, '04.06.02		CHK.				PART NAME	
CHK.		APP.				RCL B/H WP SINGLE (F: 45-150°)	

APPROVED
2016-03-07
KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK