



SECTION A-A




SECTION B-B

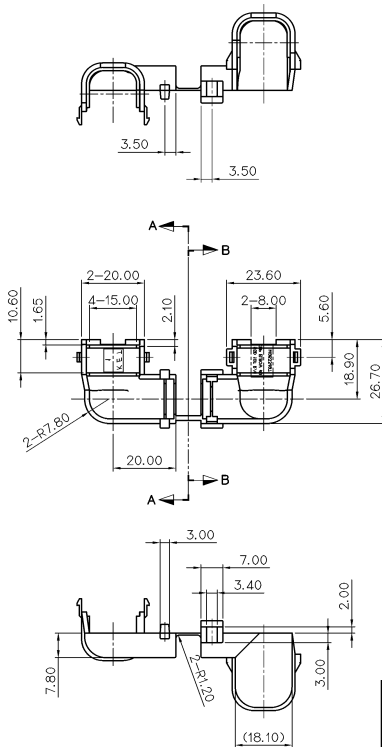

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

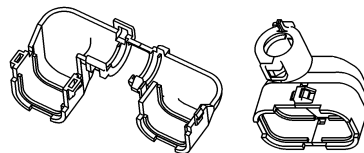

ISO VIEW

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.3 RADIUS.

2. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.

3. APPLICABLE REC. HOUSING : MG641299, MG641288

4. APPLICABLE CORRUGATED TUBE : Ø9.0

주 기

1. 지시하지 않은 반경 R은 0.3으로 한다.

2. 기능상 유해한 BURR 및 WELDLINE가 없도록.

3. 적용 REC HOUSING : MG641299, MG641288

4. 적용 CORRUGATED TUBE : Ø9.0



ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

MATERIAL	NYLON66	FINISH	BLACK	WIRE RANGE	CLASS
INSULATION		TYPE			
LTR	REVISION RECORD	DR	CHK	APP	DATE
DR. C.J.H.	05.03.26	CHK			03/26
APP.					03/26
SEE TABLE	SCALE	1/1	PART NO.	MG633497	
PART NAME	SSD 10P R/COVER(UP ELBOW Ø9.0)				