


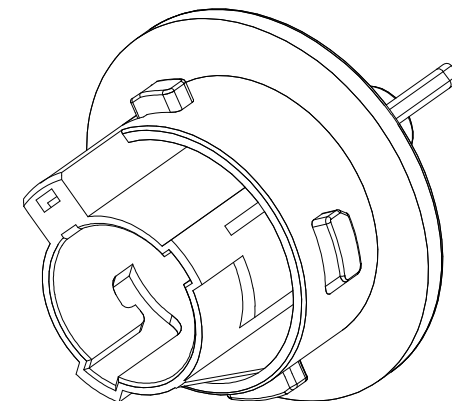
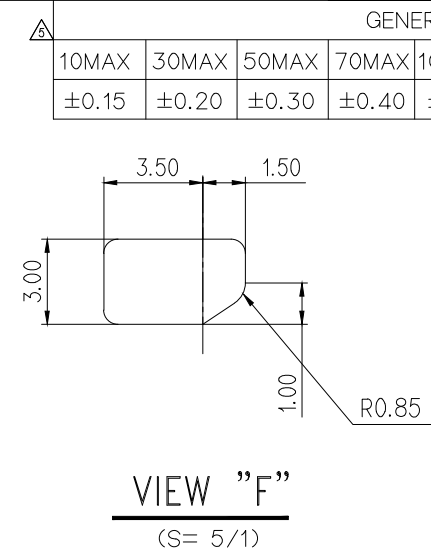
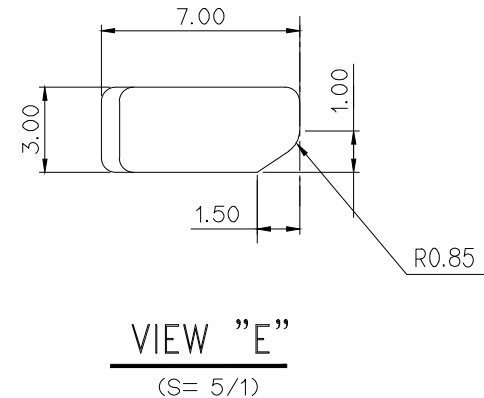
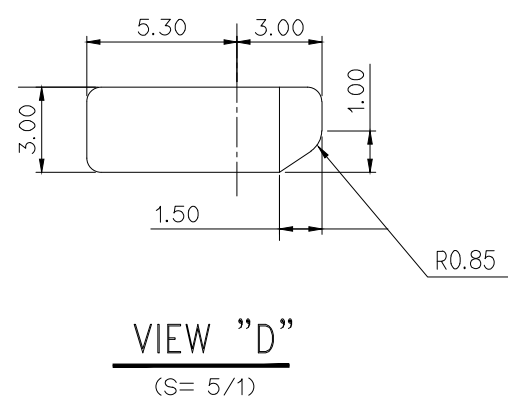
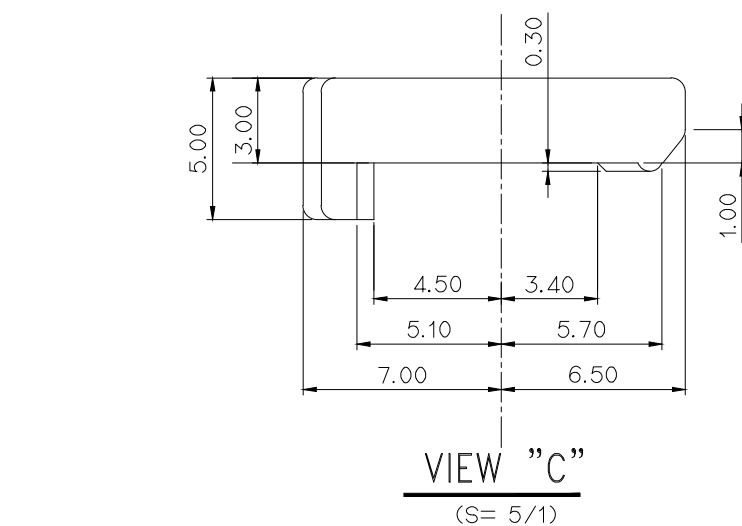
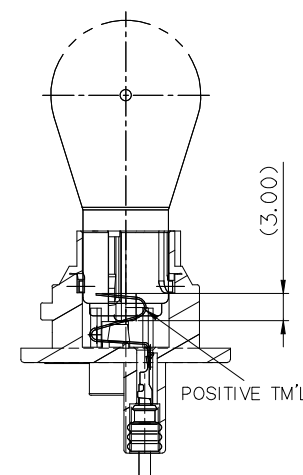
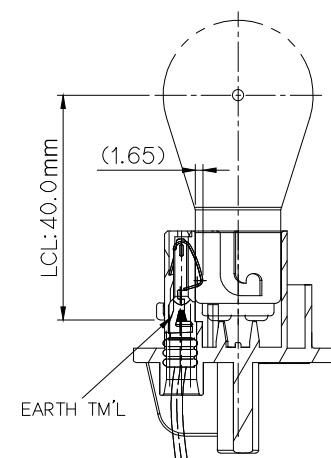
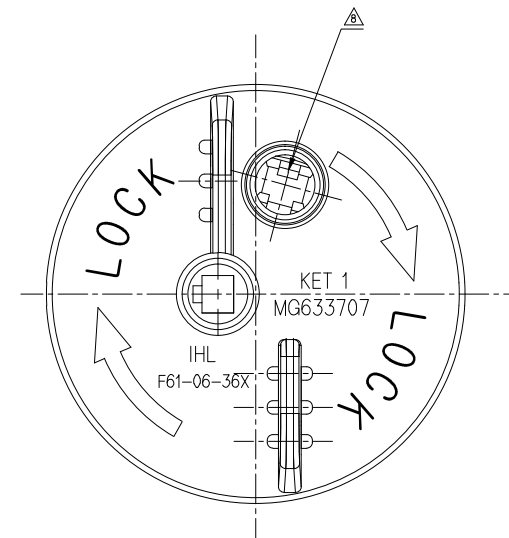
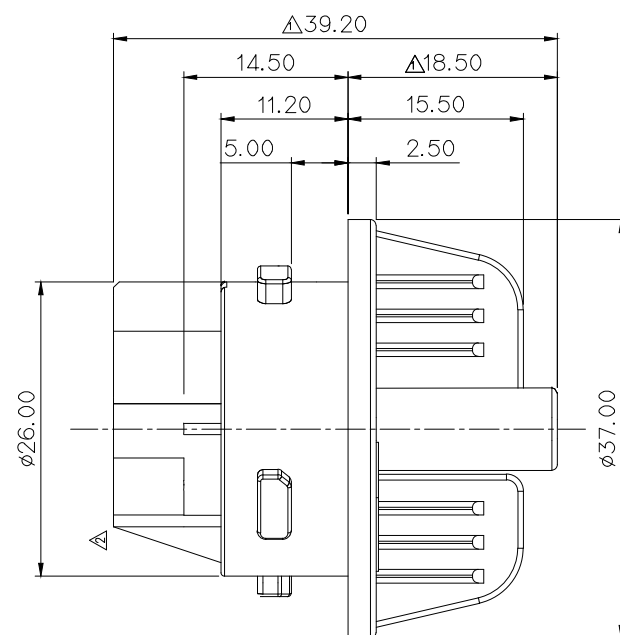


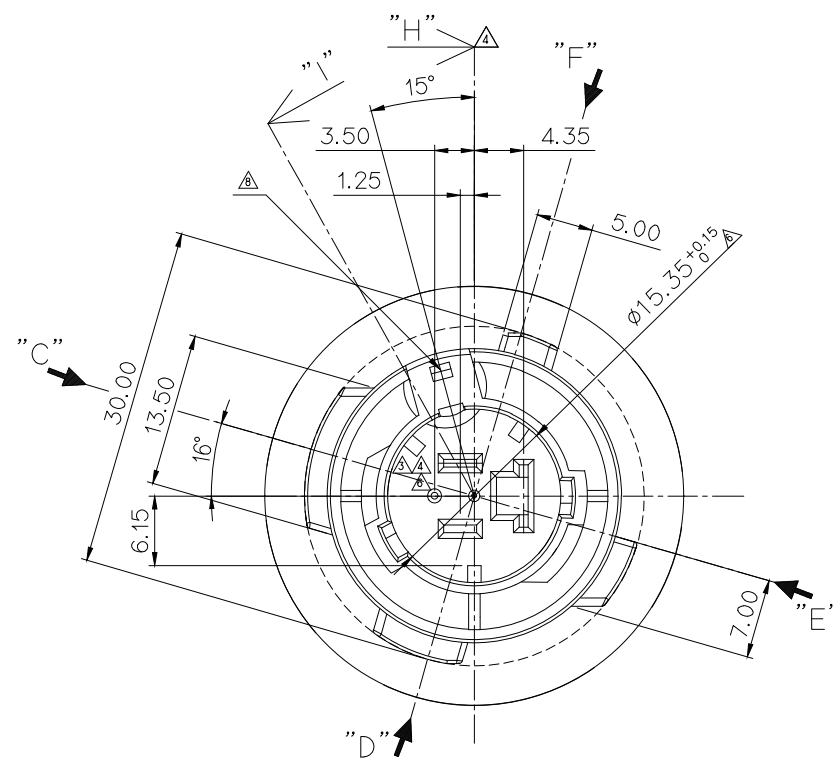

ISO VIEW

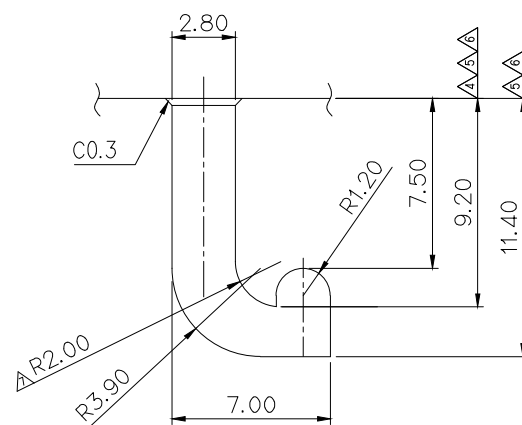

7 ASSEMBLY

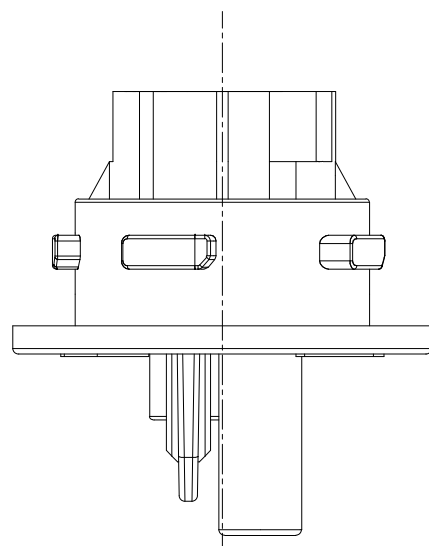

VIEW "H""I"(4:1)

△	GENERAL TOLERANCE (HOUSING)										USED ON
	10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
	±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

NOTE

- 1.APPLICABLE OF TERMINAL
ST760521-1(P), ST760795-1(E)
- 2.APPLICABLE OF SEAL GASKET : P900825(MG681919)
- 3.APPLICABLE OF WIRE SEAL : MG682028

주 기

- 1.적용 TERMINAL : ST760521-1(P), ST760795-1(E)
2.적용 SEAL GASKET : P900825(MG681919)
3.적용 WIRE SEAL : MG682028

							ISSUE MARK			
△	ECO-1412-334	근거 도면 재작성	NKT	SSH	BIN	'14.12.24	MATERIAL	PA66+MR30%	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
△	ECO-1408-017	근거 도면 재작성	NKT	SSH	BIN	'14.08.18		FINISH		GRAY
△	ECO-1406-129	근거 도면 재작성	NKT	SSH	BIN	'14.06.18	WIRE RANGE	CLASS	F61-06-361	
△	ECO-1403-077	근거 도면 재작성	NKT	SSH	HJB	'14.04.28				
△	ECO-1203-388	근거 도면 재작성	KBS	다수	3/5	'12.03.26	INSULATION	TYPE		
△	설계시양 변경서 (S060311)	근거 변경	CJH	다수	4/6	'06.11.28				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG633707
DR.	HKS, 06'.01.17		CHK.	CJH, 06'.01.20						
CHK.	HSW, 06'.01.21		APP.	KKJ, 06'.01.25			PART NAME RCL B/H WP SINGLE (F:40-150°)			