
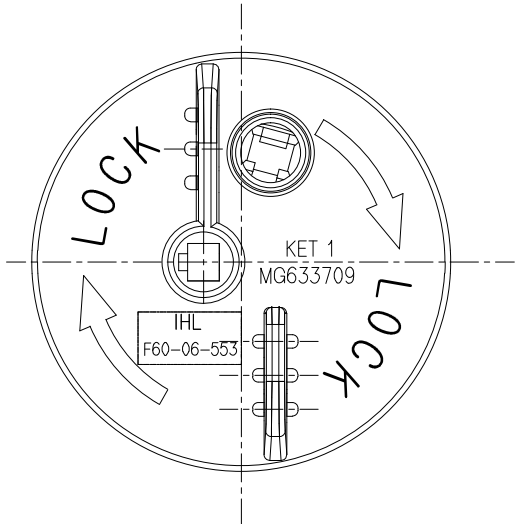
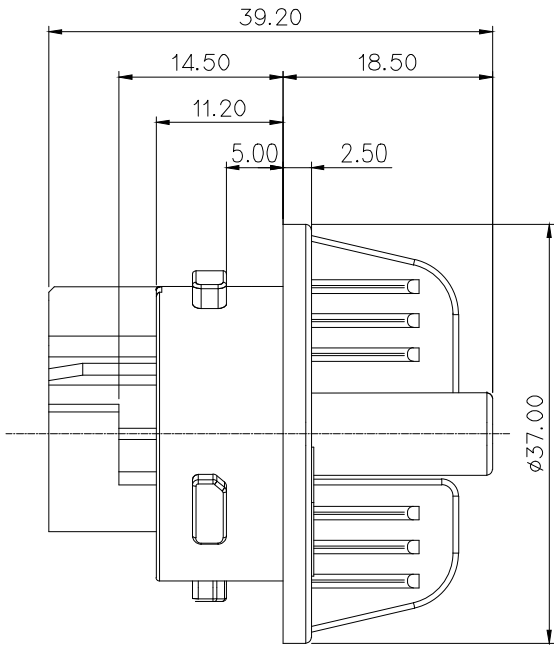
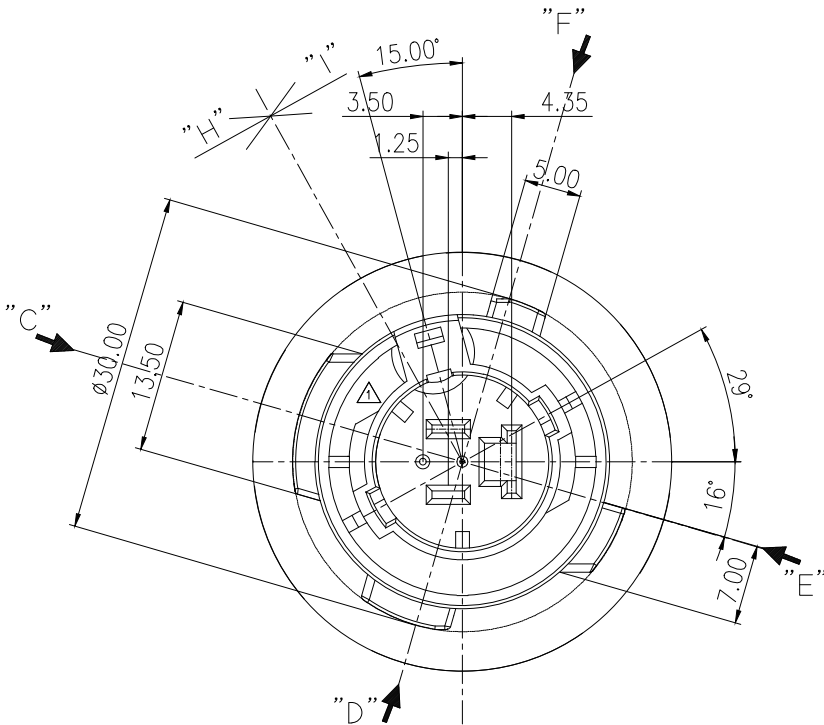
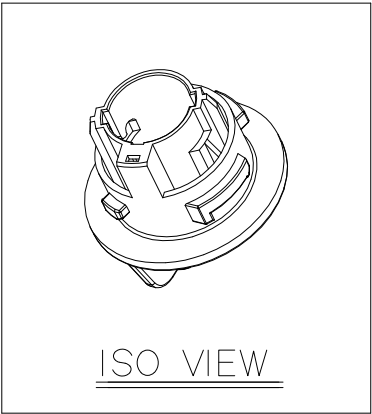
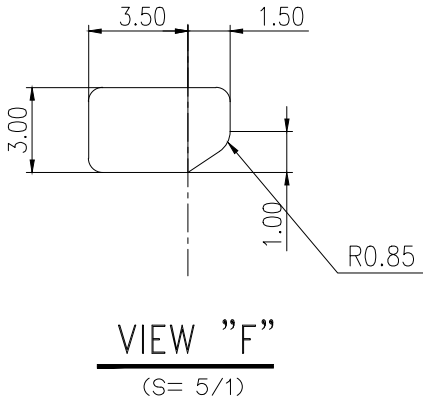
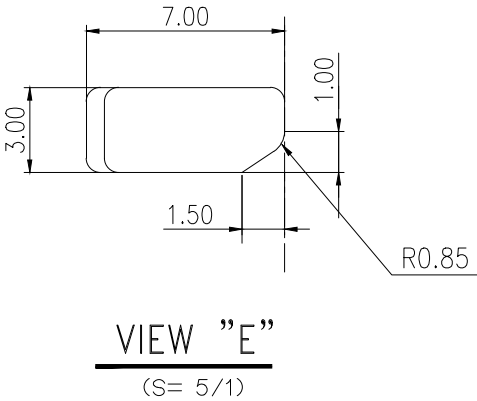
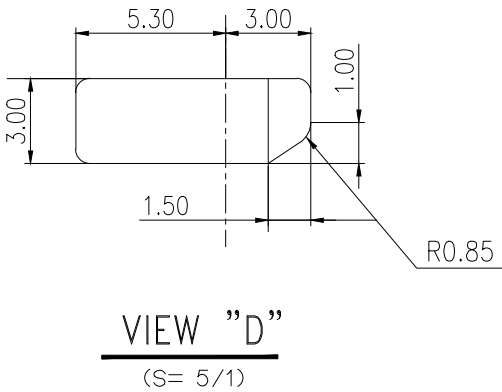


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


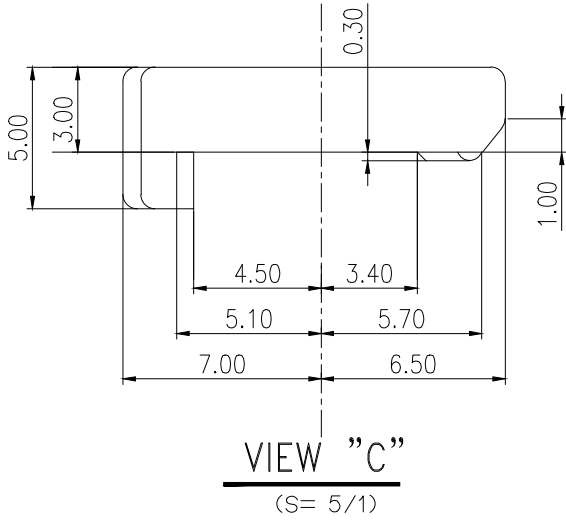


NOTE

- 1.APPLICABLE OF TERMINAL
ST760521-1(P), ST760795-1(E)
- 2.APPLICABLE OF SEAL GASKET : P900825(MG681919)
- 3.APPLICABLE OF WIRE SEAL : MG682028
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

주 기

- 1.적용 TERMINAL : ST760521-1(P), ST760795-1(E)
- 2.적용 SEAL GASKET : P900825(MG681919)
- 3.적용 WIRE SEAL : MG682028
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

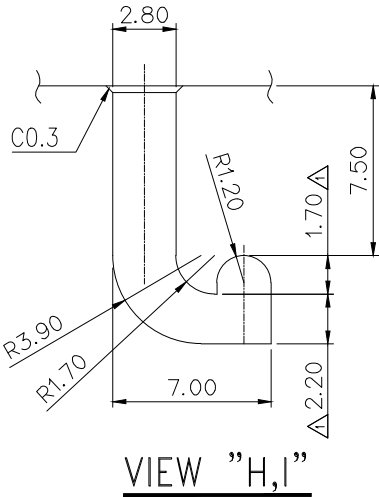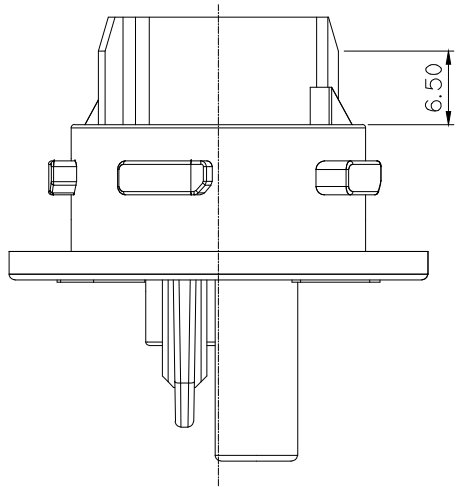

APPROVED

2016-02-16

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK

						MATERIAL PA66+MR30%		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE			
						INSULATION		CLASS F60-06-553	
△	ECO-1406-129극기 도면 재작성			NKT	SSH	BIN	14.06.18	TYPE	
LTR	REVISION RECORD			DR	CHK	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
DR.		NKT, 14.06.18		CHK.		SSH, 14.06.18		PART NO. MG633709-7	
CHK.				APP.		BIN, 14.06.18		PART NAME RCL B/H WP SINGLE (F:40-180°)	