

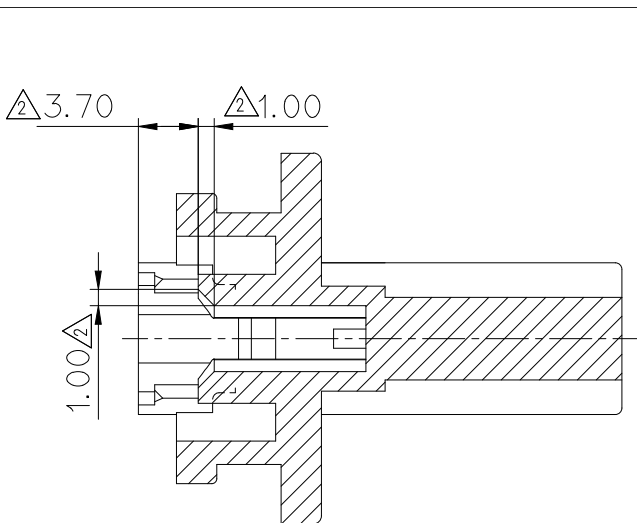
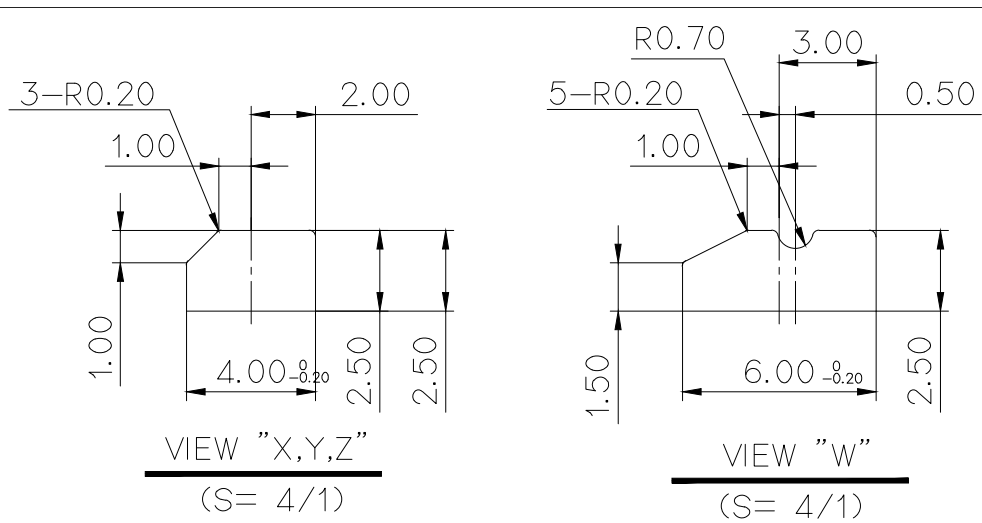


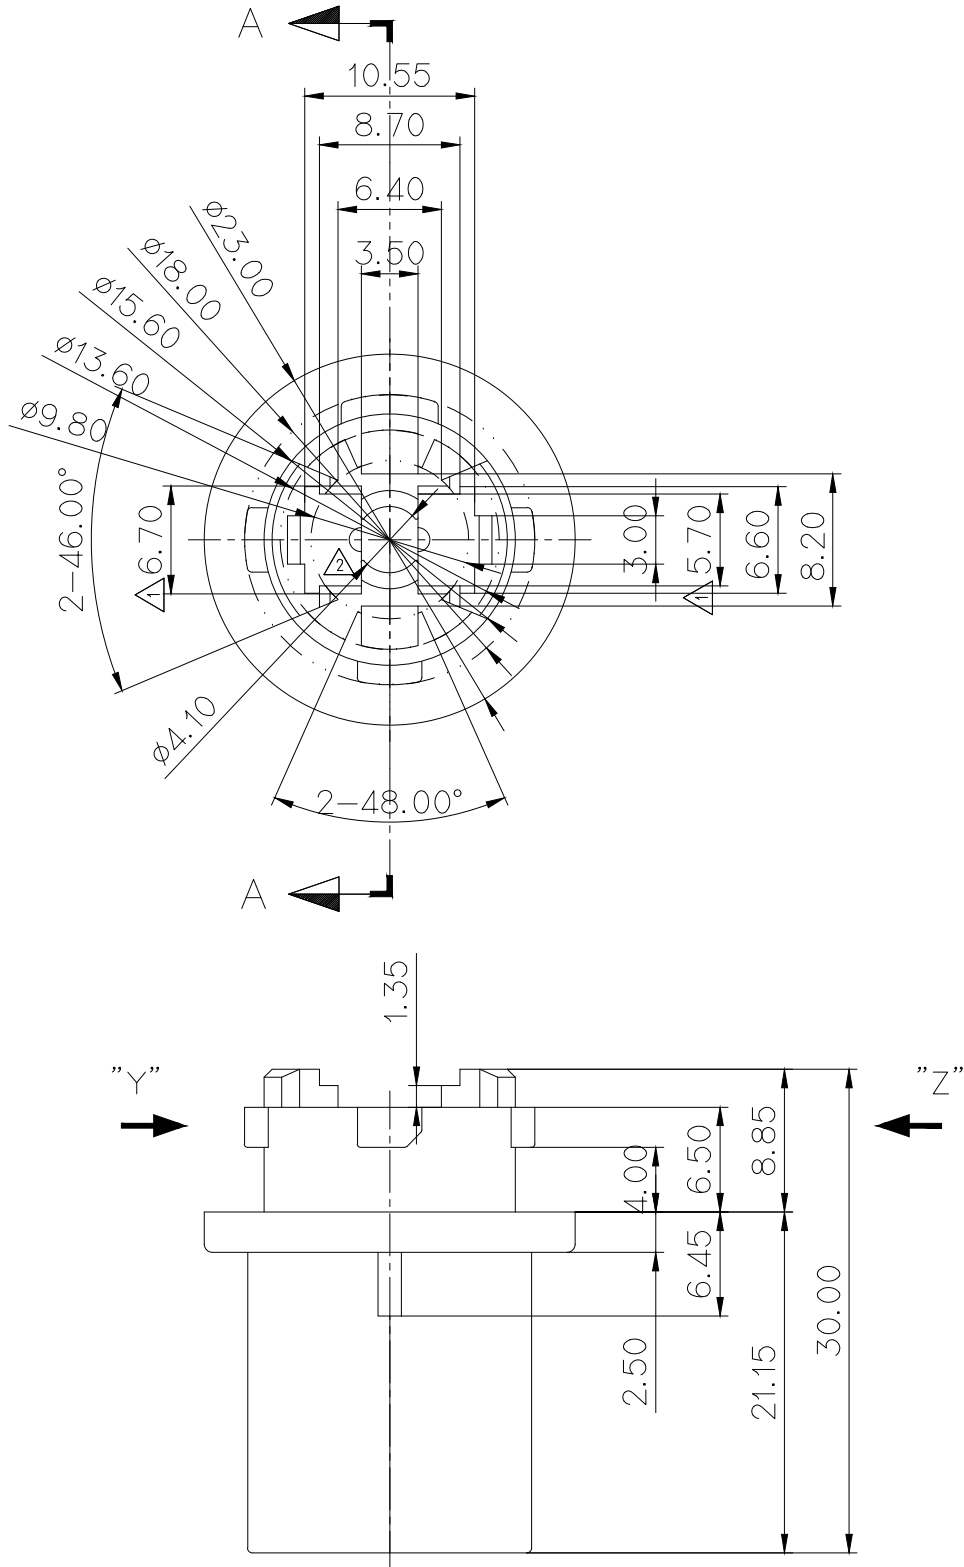

SECTION A-A

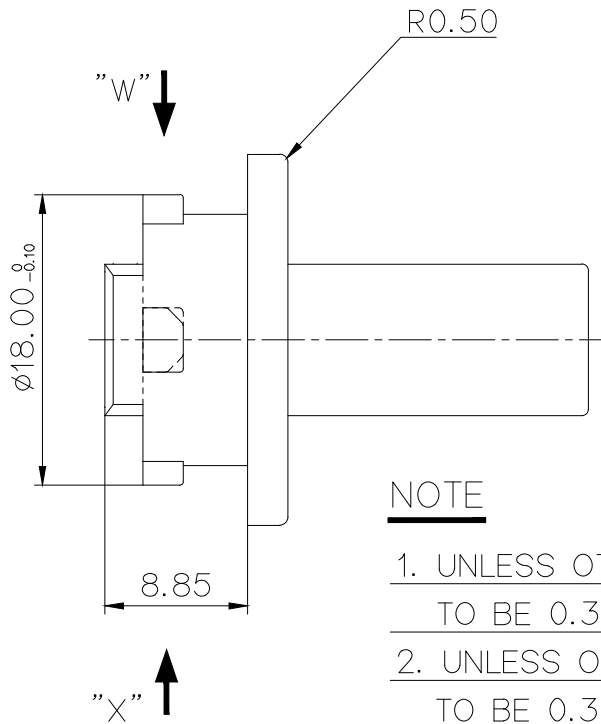


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 TERMINAL : ST780915
- 5.적용 WIRE SEAL : MG682027
- △6.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE OF TERMINAL : ST780915
5. APPLICABLE OF WIRE SEAL : MG682027
- △6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

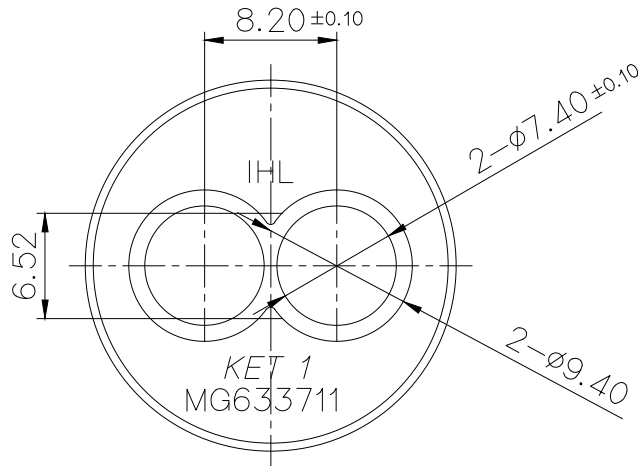

						MATERIAL	PA66+MR30%	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	L/GRAY	
						WIRE RANGE		CLASS
	ECO-1407-279 근거 도면 재 작성	CJH	SSH	BIN		14.07.28	INSULATION	TYPE C70-06-151
	설계시양변경(S090223) 근거 도면재작성 (BULB 삽입부 내측벽 살높이 축소)	BJG				09.08.12		PART NO. MG633711
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1
DR.	CYJ, '05.11.14	CHK.	CJH,	'06.01.19	PART NAME			
CHK.	HSW, '06.01.19	APP.	KKJ,	'06.01.29	BACK-UPB/H WP HS'G			

APPROVED

2016-02-16

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 3

ISSUE MARK