
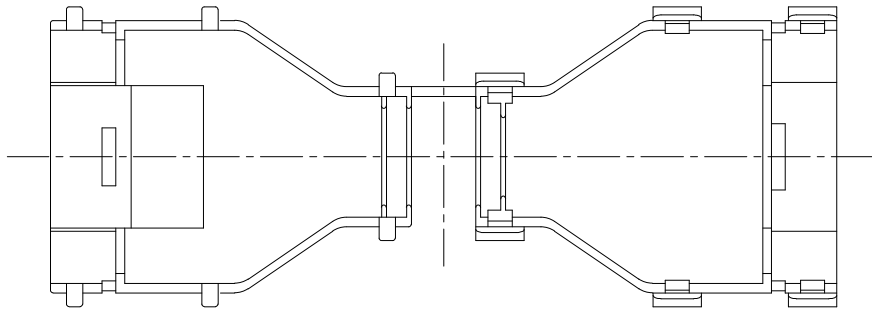
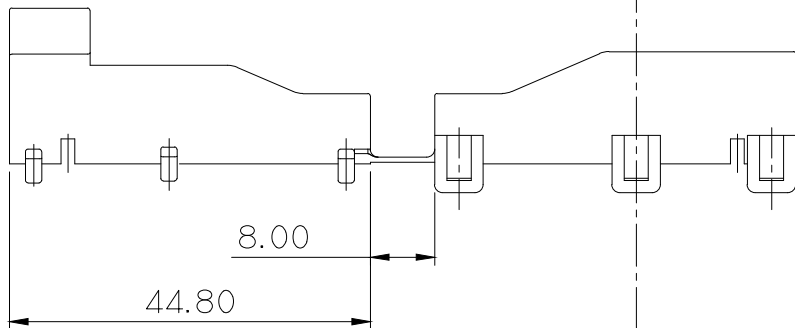
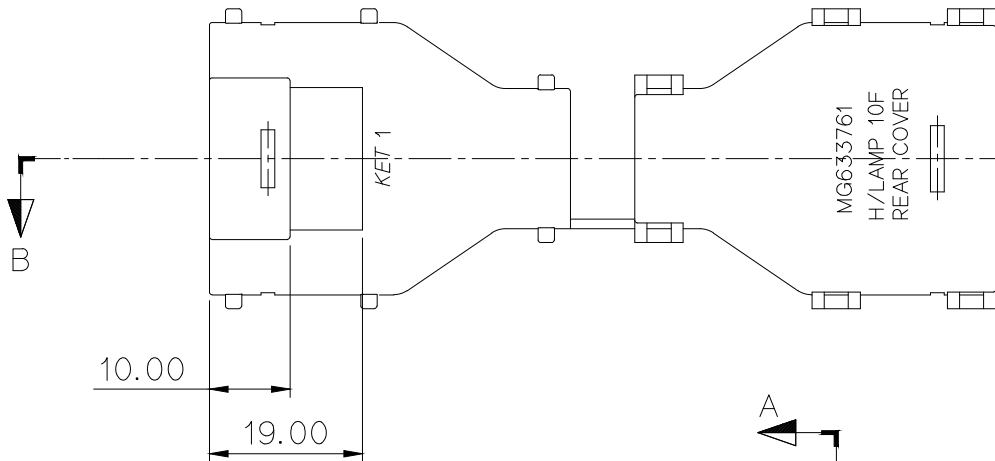
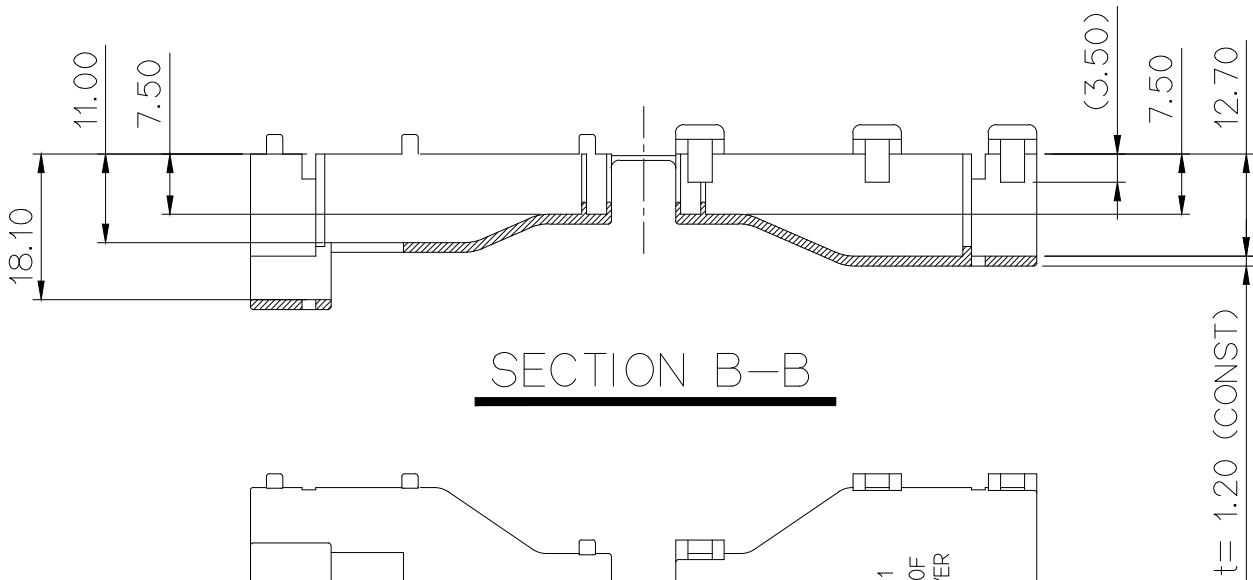
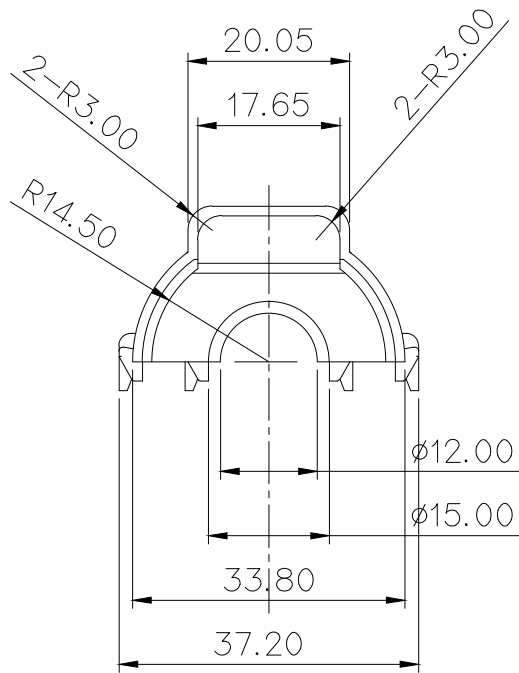


SECTION A-A

SECTION B-B

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

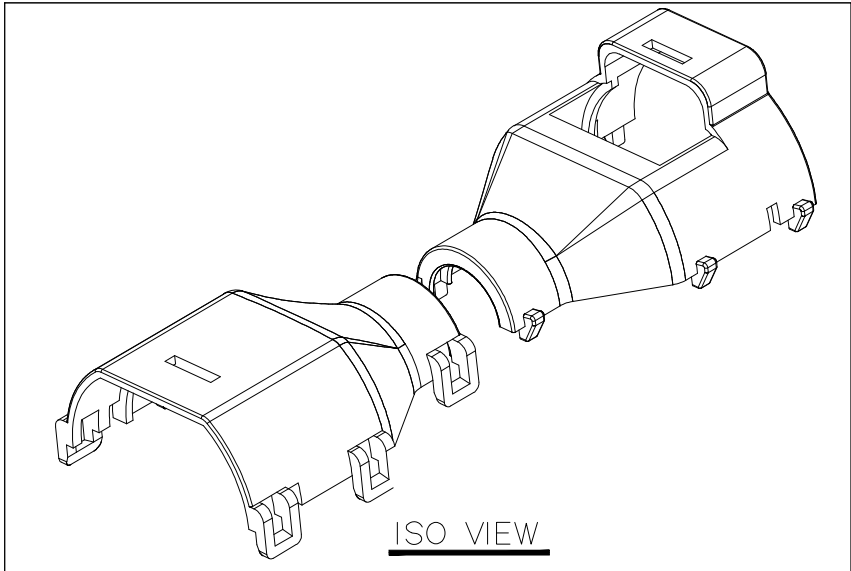

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3.적용 HOUSING : MG643546
- 4.적용 CORRUGATED TUBE :ø11.0

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE REC. HOUSING : MG643546
4. APPLICABLE CORRUGATED TUBE :ø11.0



ISSUE MARK

					MATERIAL NYLON66		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH BLACK				
					WIRE RANGE		CLASS H/LAMP		
					INSULATION		TYPE .090		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG633761
DR.	HKS. 2007.03.09		CHK.	J.Y.S		03/09	PART NAME H/LAMP 10F REAR COVER		
CHK.	2007 03/13		APP.	2007		03/13			