



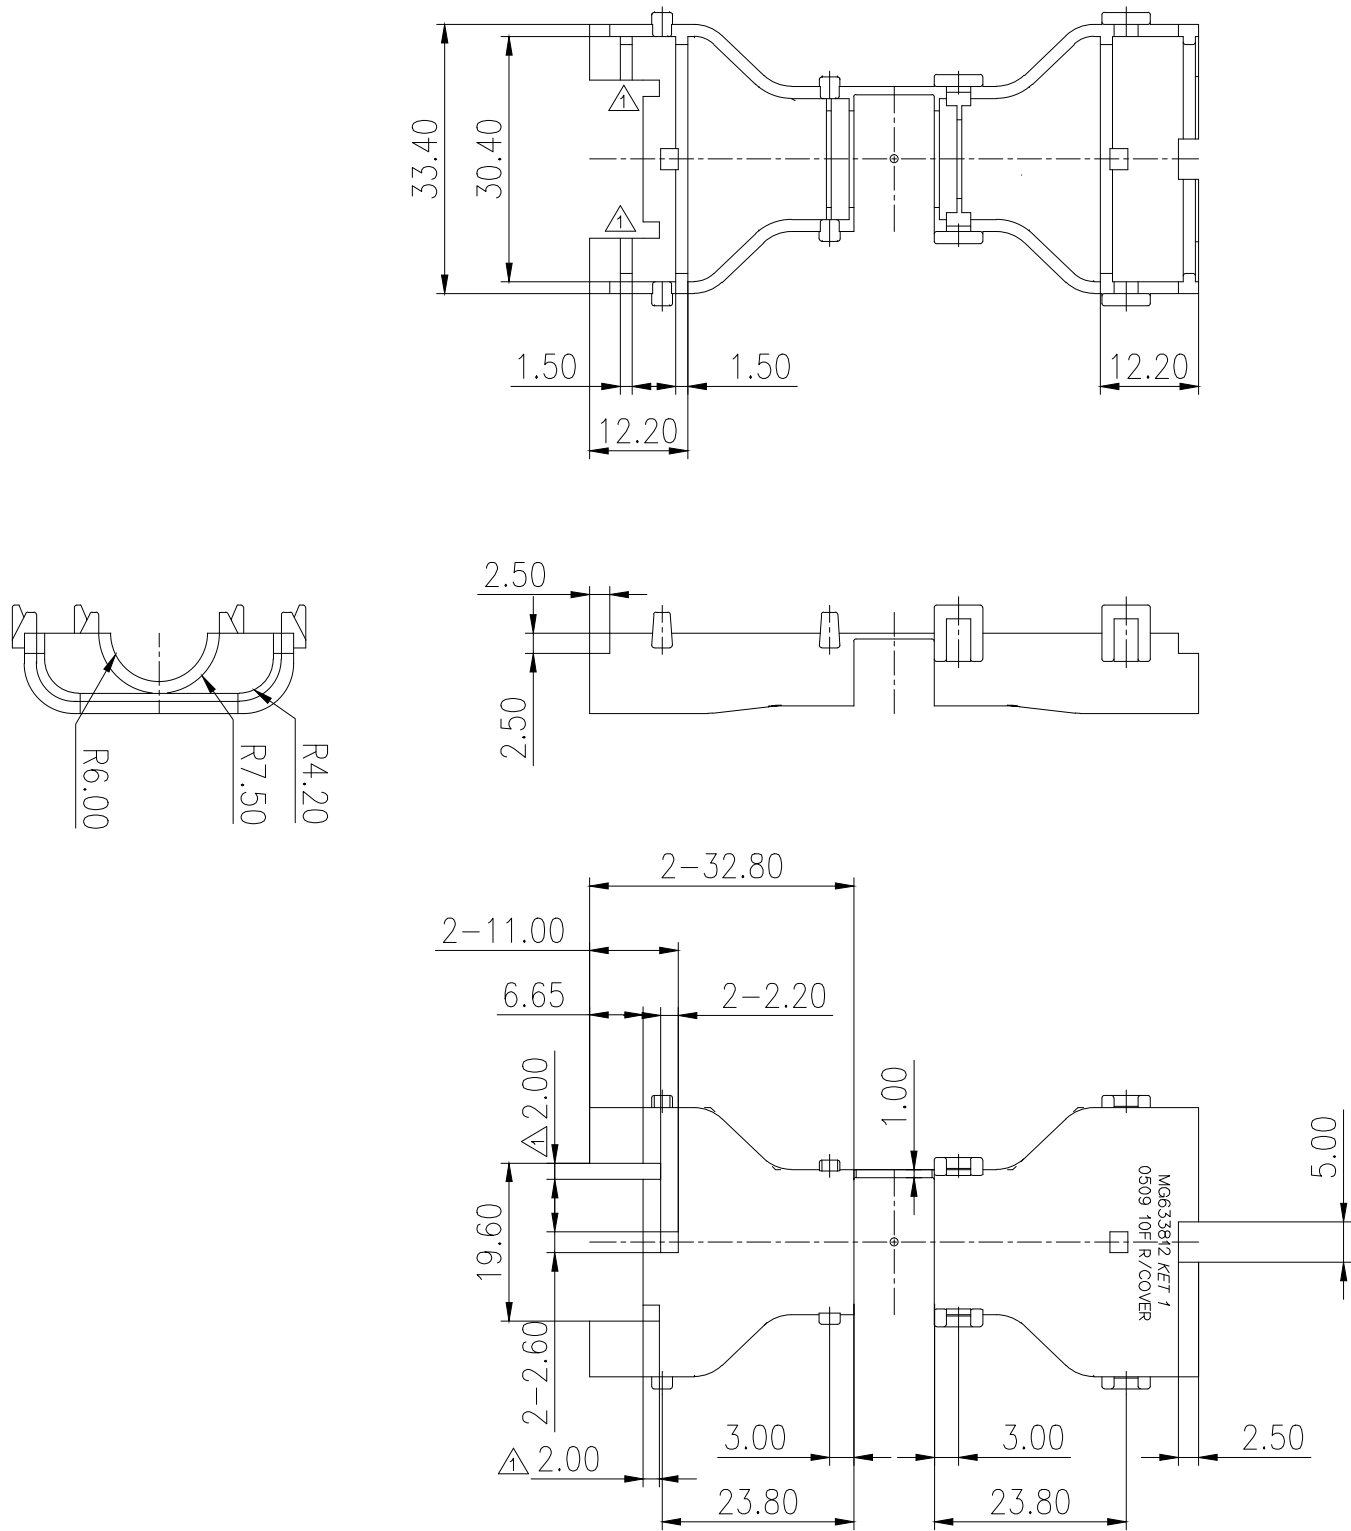

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

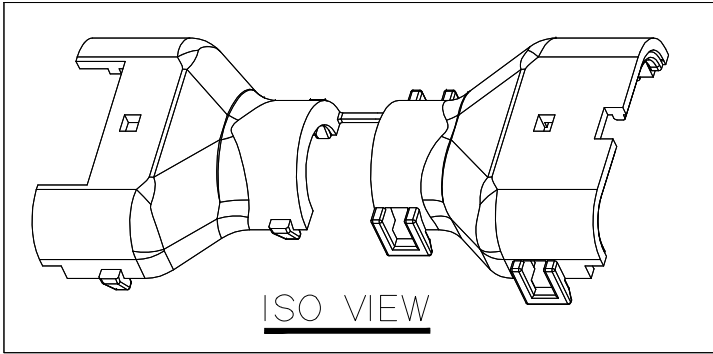

주 기

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3.적용 REC HOUSING : MG643793

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE REC HOUSING : MG643793

						MATERIAL	NYLON66	IKET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	BLACK			
						WIRE RANGE			CLASS	
						INSULATION			TYPE	
①	ECO-1210-034 큰거 도면 재작성	YM.K	CSH	HSK	12.10.09					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG633812	
DR.	CYJ '06. 10.26	CHK.	장		'06.10.31	PART NAME				
CHK.		APP.	장		'06.10.31	0509 10F REAR COVER				

APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

						MATERIAL	NYLON66	IKET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	BLACK			
						WIRE RANGE			CLASS	
						INSULATION			TYPE	
①	ECO-1210-034 큰거 도면 재작성	YM.K	CSH	HSK	12.10.09					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG633812	
DR.	CYJ '06. 10.26	CHK.	장		'06.10.31	PART NAME				
CHK.		APP.	장		'06.10.31	0509 10F REAR COVER				