

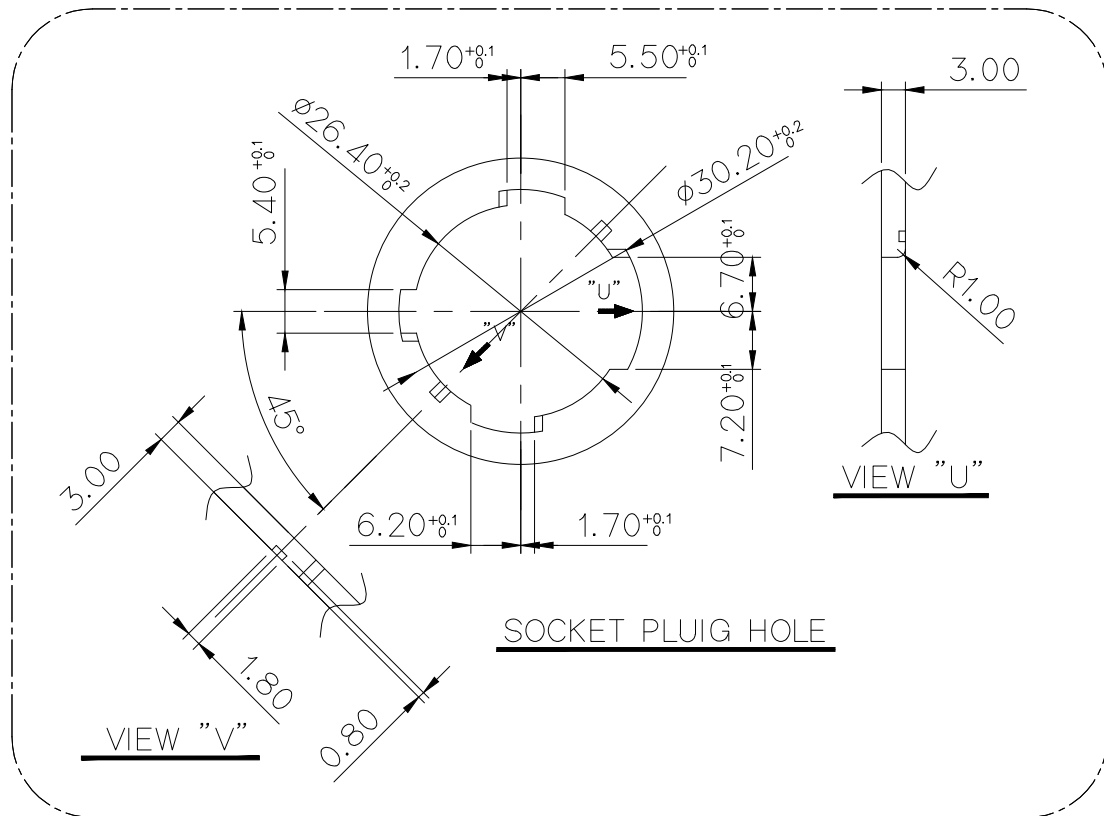

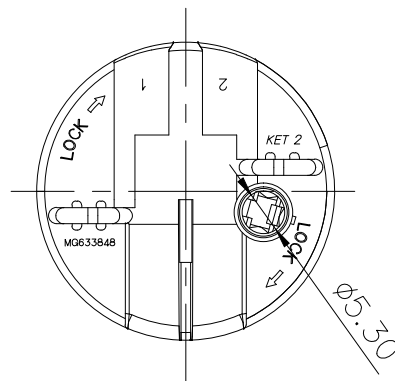
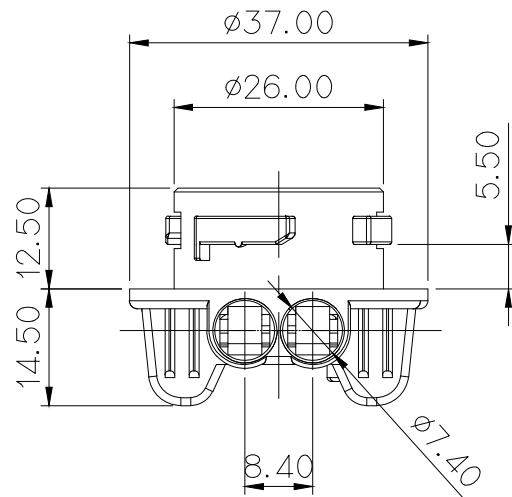

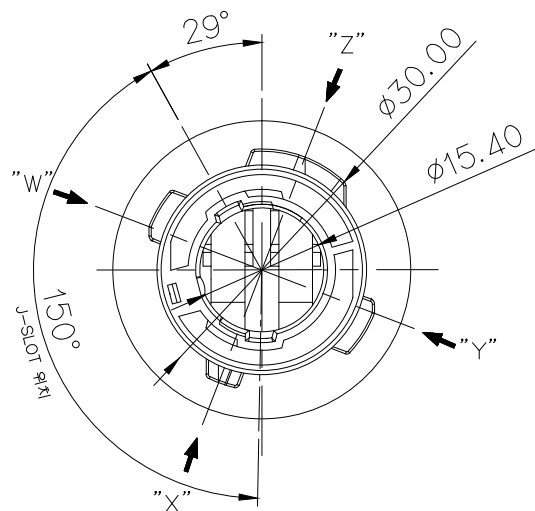


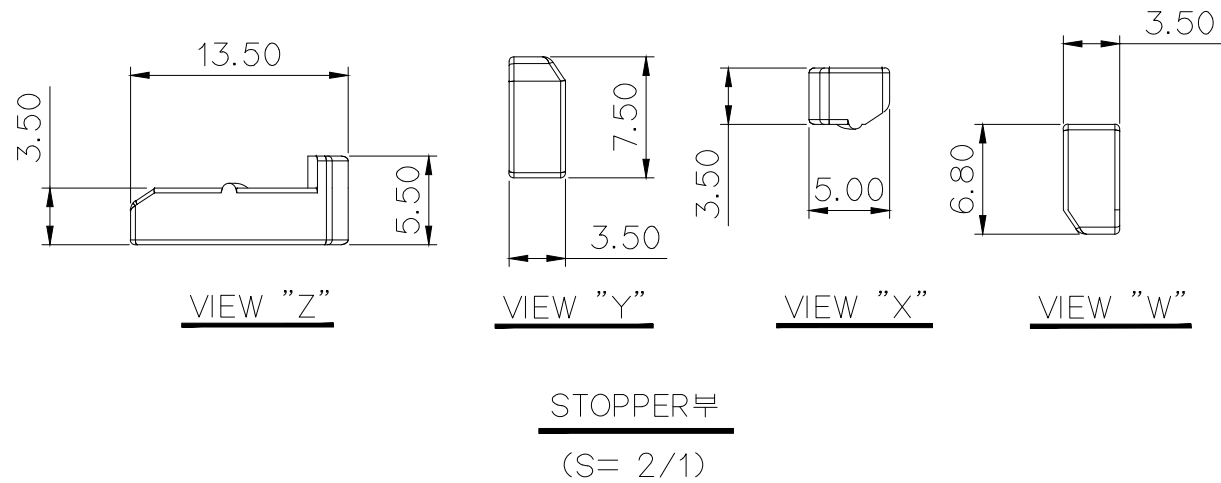

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

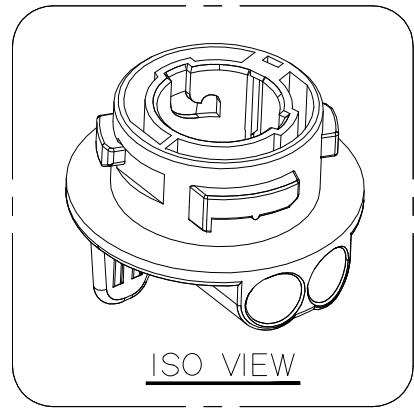

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST760794(P), ST760795(E)
- 적용 SEAL GASKET : P900825
- 적용 WIRE SEAL : MG682027(P),MG682028(E)

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE OF TERMINAL :ST760794(P), ST760795(E)
- APPLICABLE OF SEAL GASKET : P900825
- APPLICABLE OF WIRE SEAL : MG682027(P),682028(E)



ISSUE MARK

					MATERIAL PA66+MR30%		 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH GRAY					
					WIRE RANGE			CLASS		
					INSULATION			TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG633848
DR. HEM, 07'.03.06			CHK.			PART NAME				
CHK.			APP. KKJ, 03/08			RCL B/HOLDER WP DOUBLE HS'G(150°)				