
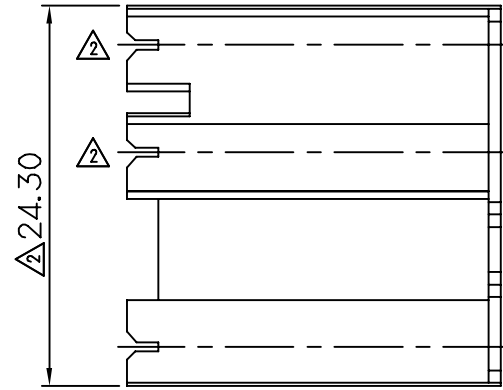
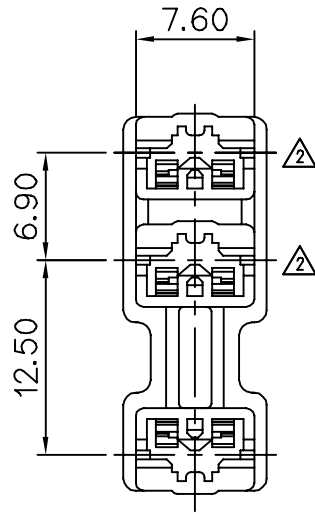
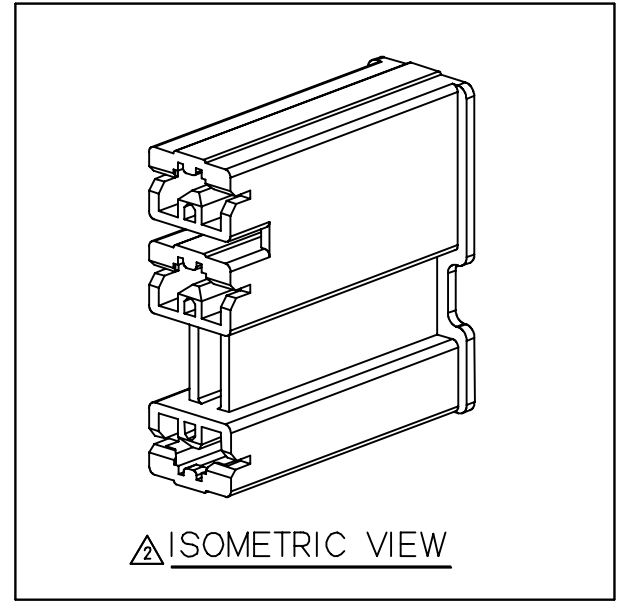


NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730567-3/568-3/569-3
- 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs,DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

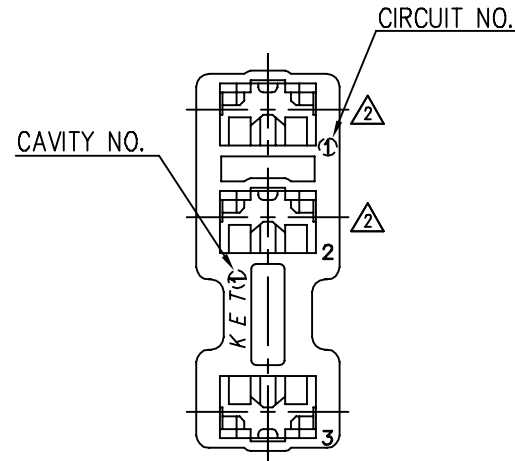

주 기

- 기능상 유해한 BURR, WELDLINE이 없을 것
- 적용 TERMINAL: ST730567-3/568-3/569-3
- 제품내 함유된 10대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs,DEHP,DBP,BBP,DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

APPROVED

2021-10-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		NYLON(V0)	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH		NATURAL		
						WIRE RANGE			CLASS	.187
	ECO-2012-163 근거 도면 변경		LYS	PSH	KSH	'20.12.09.		INSULATION		TYPE
	설계사양변경(S110128)근거 도면 자작성		KSJ			'11.04.27		TOLERANCE EXCEPT AS NOTED		SCALE
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		SEE TABLE	2/1	PART NO.
DR. KSH. 2007.04.06			CHK. 					PART NAME		
CHK.			APP.					.187 P-LOCK 3P HOUSING		