
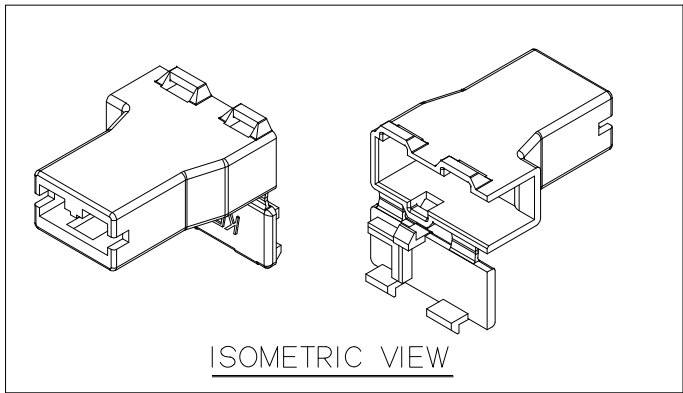
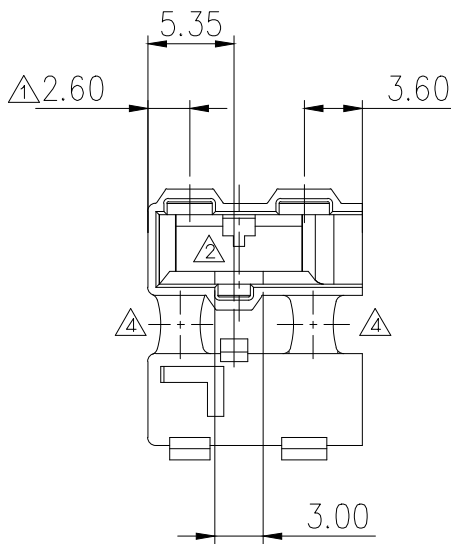
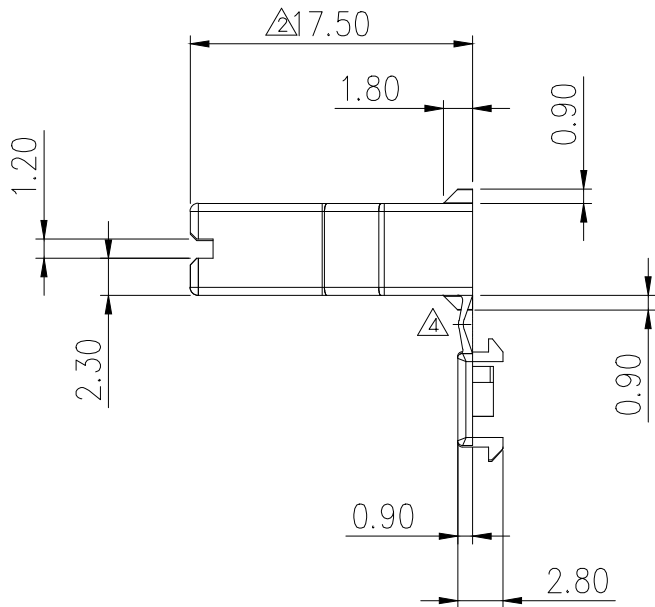
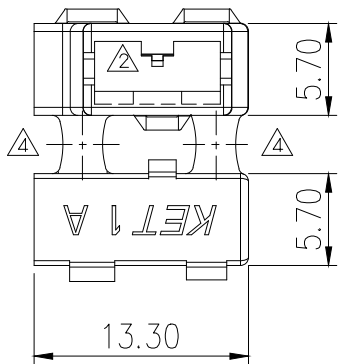


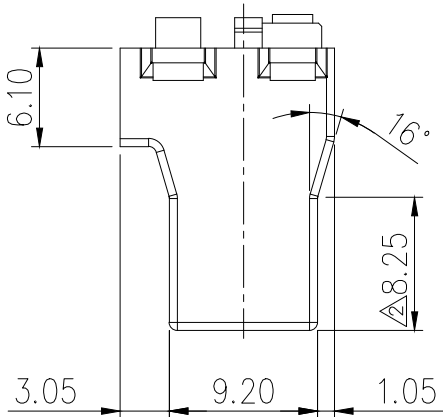

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

P/NO	MATERIAL
MG633976	PA66(V0)
MG633976K	PET+PC(GWIT)

.MG633976	
NO.	COLOR
* 0	NATURAL
* 1	RED
* 2	BLUE
3	YELLOW
4	GRAY
* 5	BLACK
6	GREEN

.MG633976K	
NO.	COLOR
* 0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
* 5	BLACK
6	GREEN

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730649-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR, WELDLINE이 없을 것
- 적용 TERMINAL: ST730649-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

7	ECO-1707-297근거 도면 제작성	LCM	KSH	BUC	'17.07.18
6	ECO-1707-222근거 도면 제작성	LCM	KSH	BUC	'17.07.13
5	ECO-1409-139근거 도면 제작성	LCM	KSH	BUC	'14.09.19
4	ECO-1202-323근거 도면 제작성	PJM	가제	가제	'12.02.15
3	설계사양변경(S110128)근거 도면 제작성	KSJ	가제	가제	'11.04.27
2	설계사양변경(S080229)근거 도면 제작성	PJM	가제	가제	080908
1	설계사양변경(S080073)근거 도면 제작성	PJM	가제	가제	080811
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR. JJY. 2007.07.12		CHK.	가제		
CHK.		APP.	가제		

MATERIAL  SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH  SEE TABLE			
WIRE RANGE			
INSULATION			
TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO.  SEE TABLE
PART NAME 250 P-LOCK FLAG 1P HOUSING (HINGE)			



ISSUE MARK