

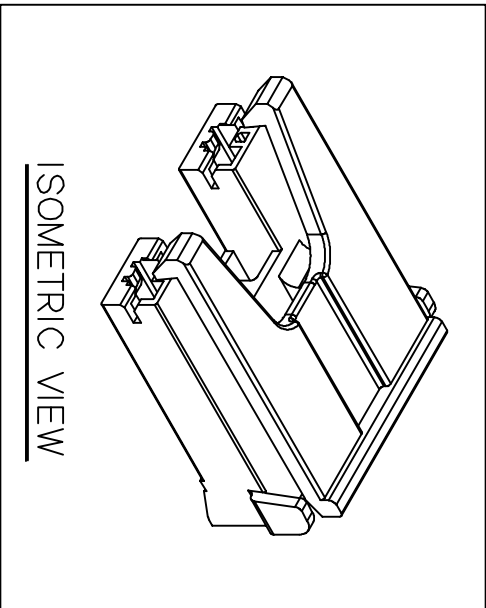
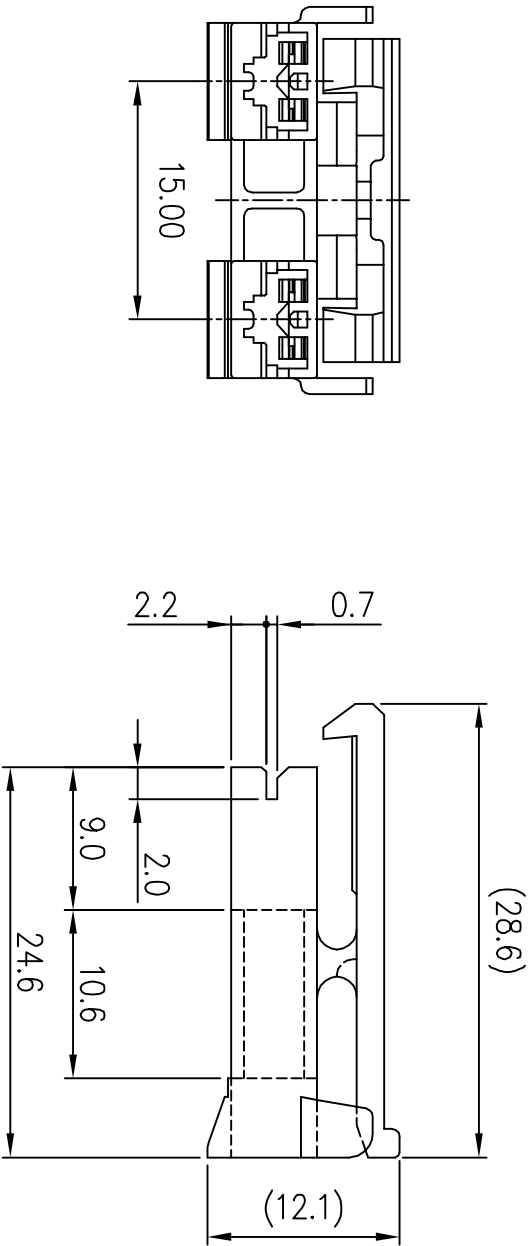


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

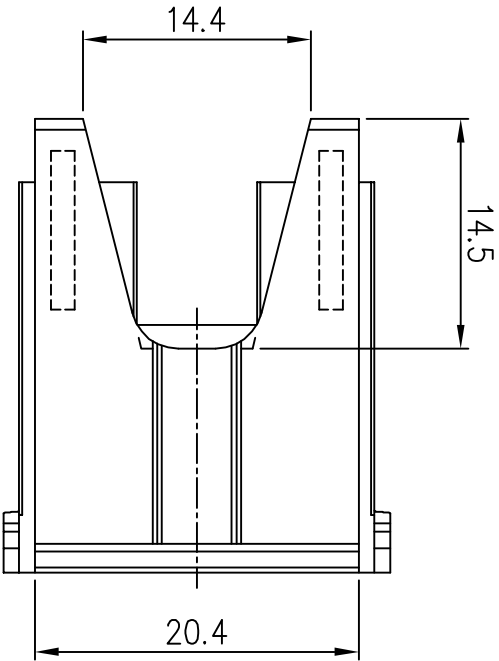

ISOMETRIC VIEW

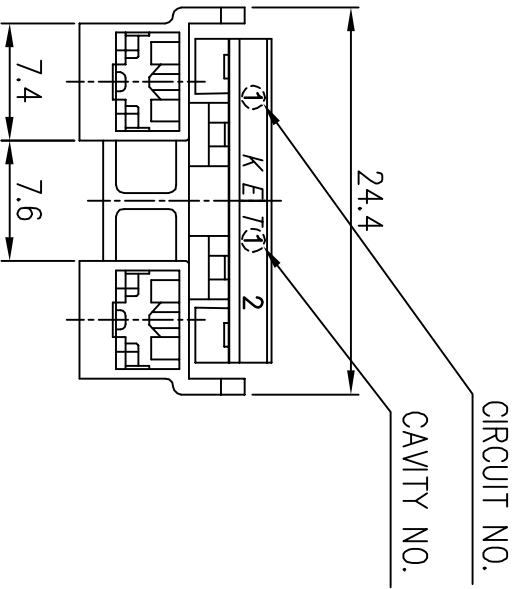

NO.	MATERIAL	COLOR
0	PBT+PC(V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730567-3/568-3/569-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.

주 기

- 기능상 유해한 BURR, WELDLINE이 없을 것
- 적용 TERMINAL: ST730567-3/568-3/569-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL	PBT+PC (V0)		KT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	RED		
						WIRE RANGE			
						INSULATION			
△	상기(8번장(S10128)근거 도면 재작성					KSJ			11.04.27
LTR	REVISION RECORD				DR.	CHK.	APP.	DATE	
DR.	P.J.M '07.10.01				CHK.				
CHK.					APP.				
PART NAME									
187 P-LOCK 2P HOUSING (PITCH 15mm)									

ISSUE MARK