



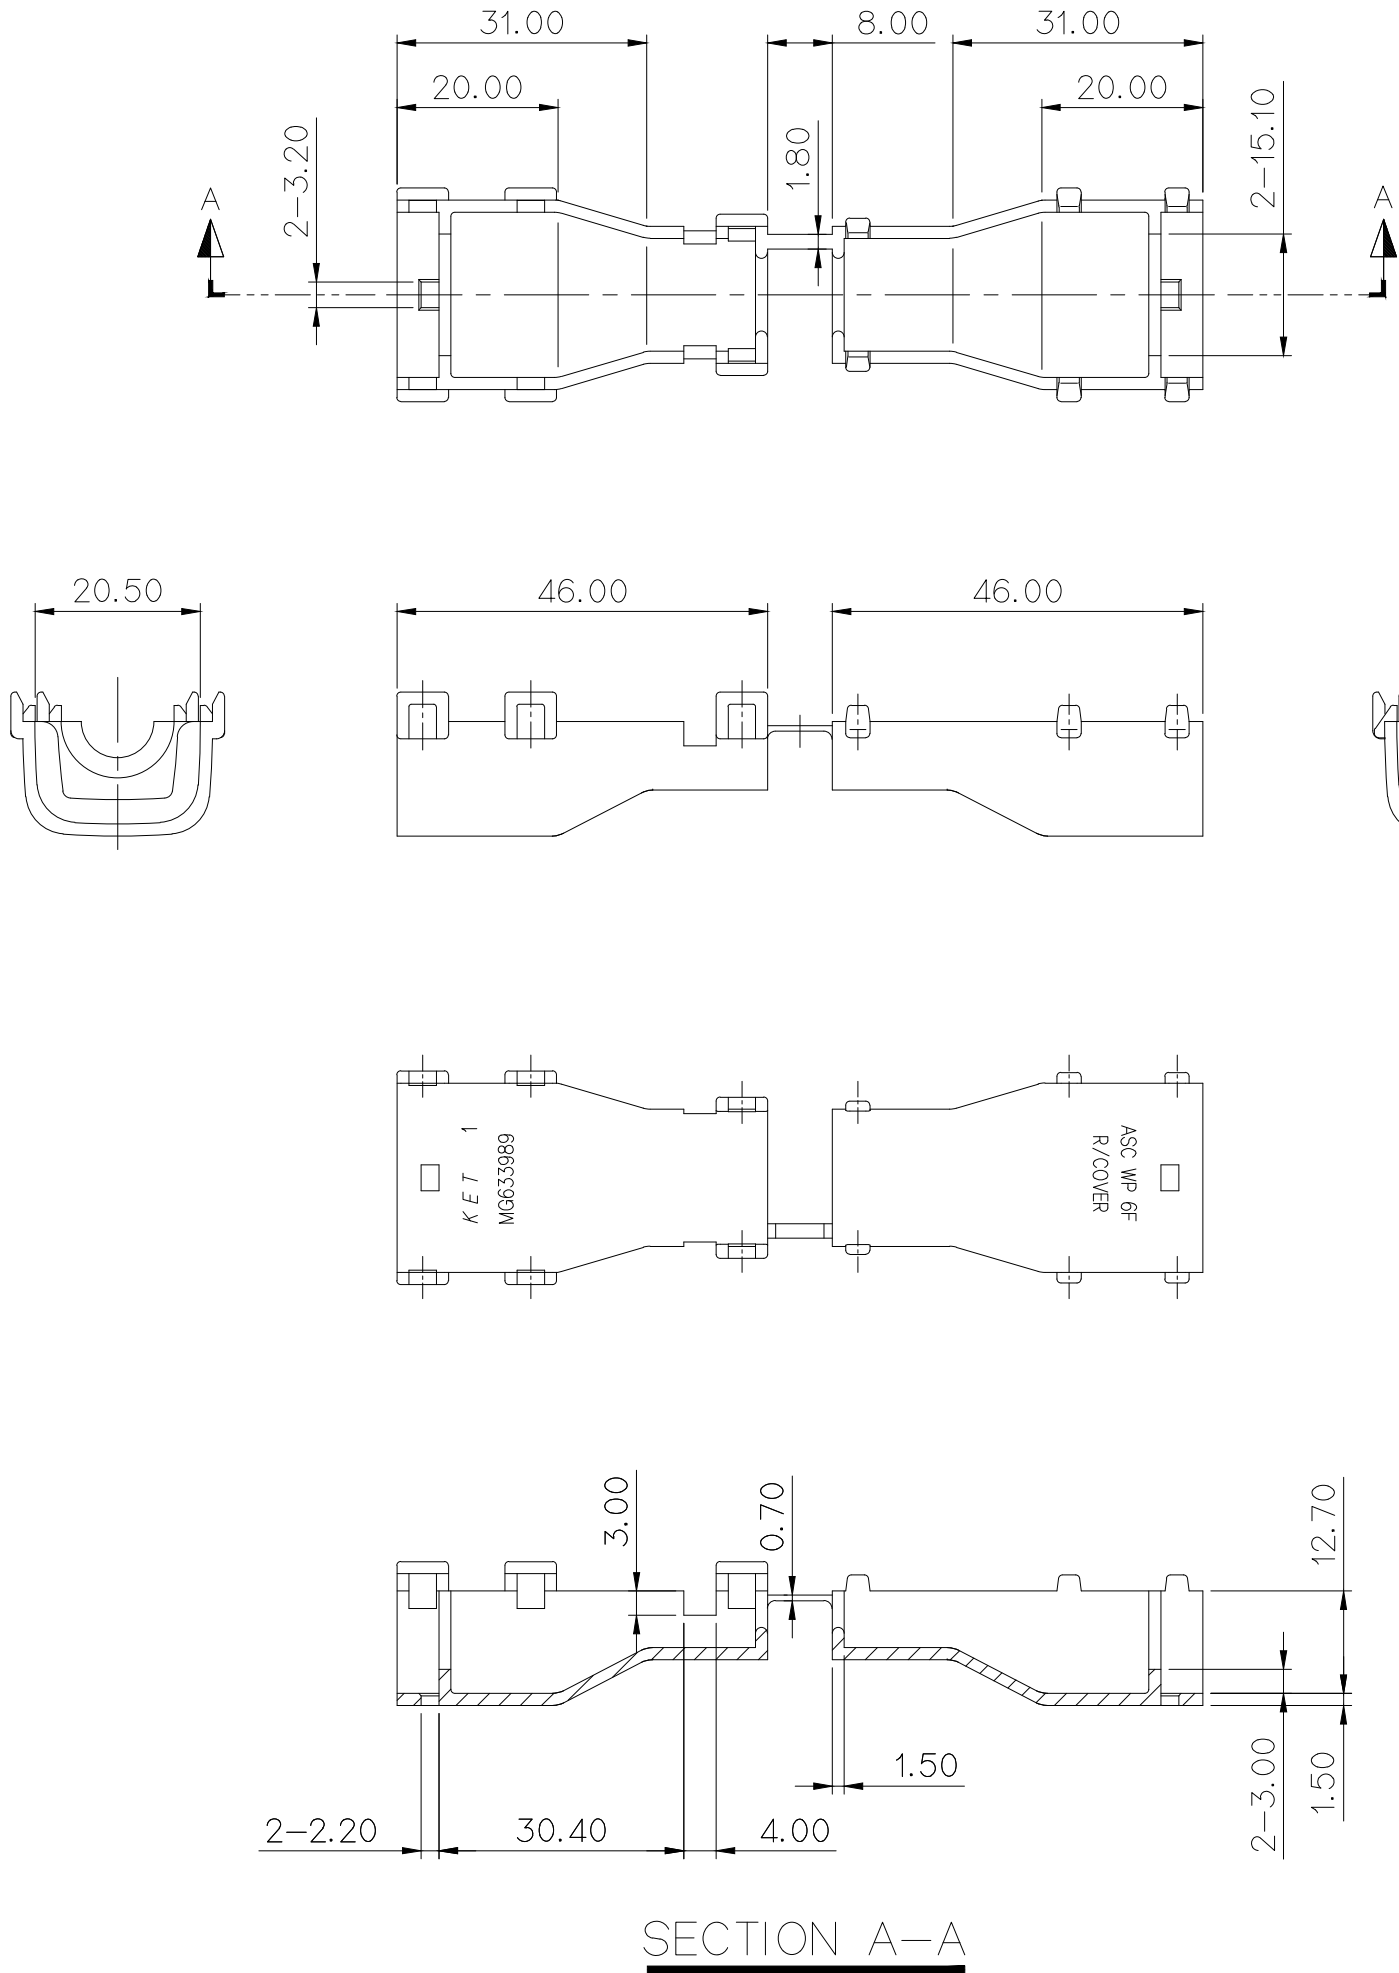

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

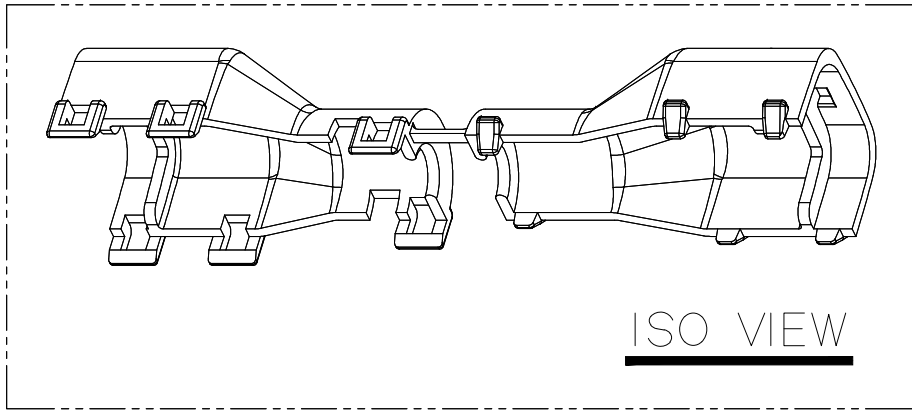

주 기

- 지시하지 않은 반경 R은 0.3 로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG652582
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG652582
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

						MATERIAL	NYLON66	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	BLACK		
						WIRE RANGE			
						INSULATION			
	설계사양변경(R0_S8003)큰거 도면 재작성		KBS			'08.01.10			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG633989
	DR. KBS '07.12.13		CHK. JYS '07.12.13						
		12/13	APP.		12/13		PART NAME ASC WP JOINT 6F REAR COVER		