
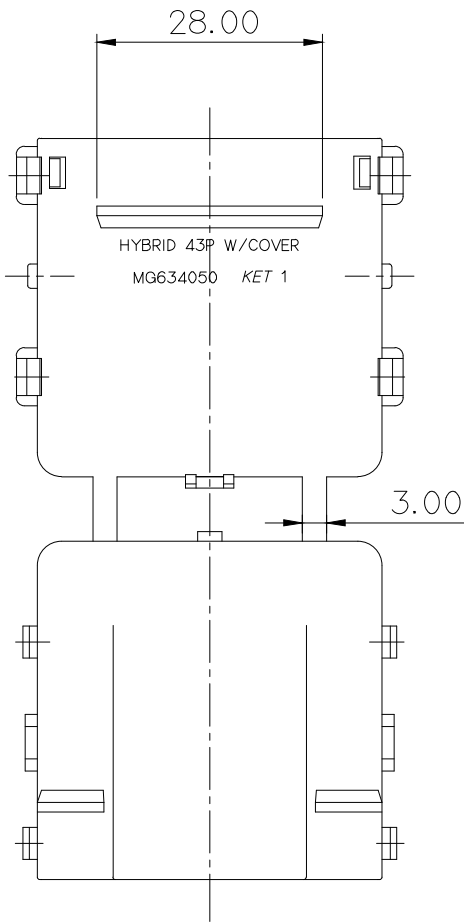
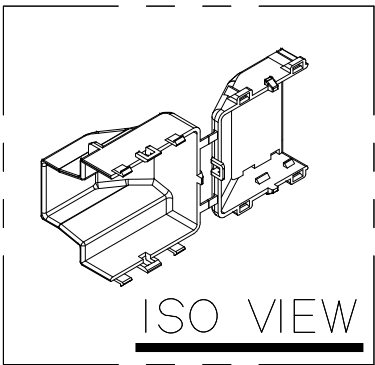
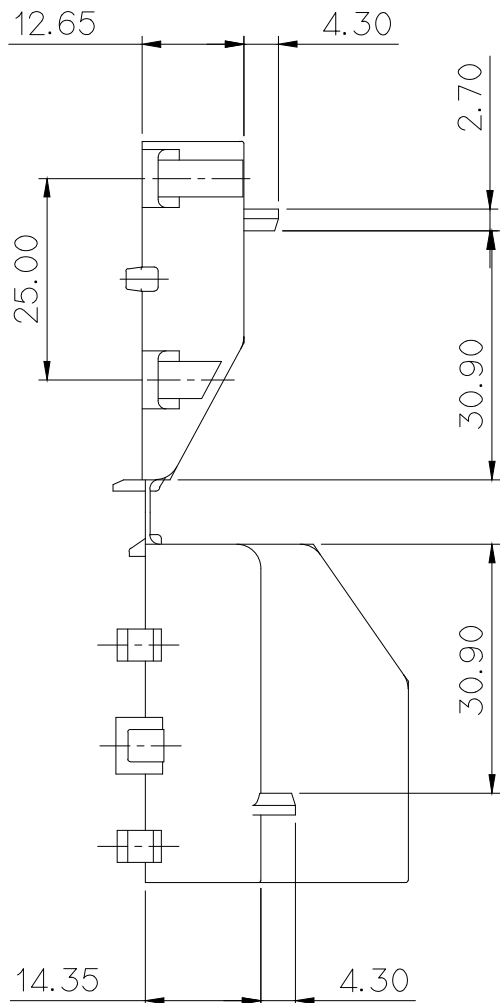
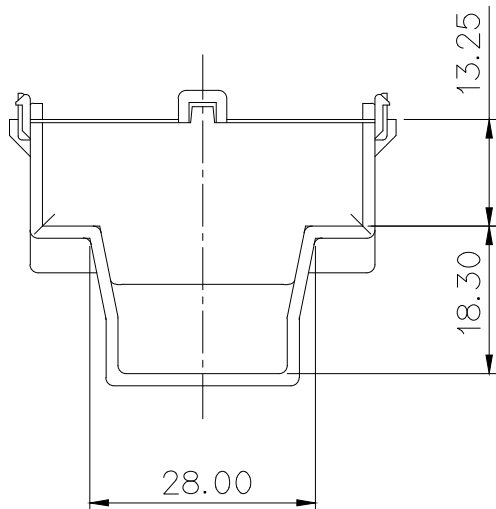
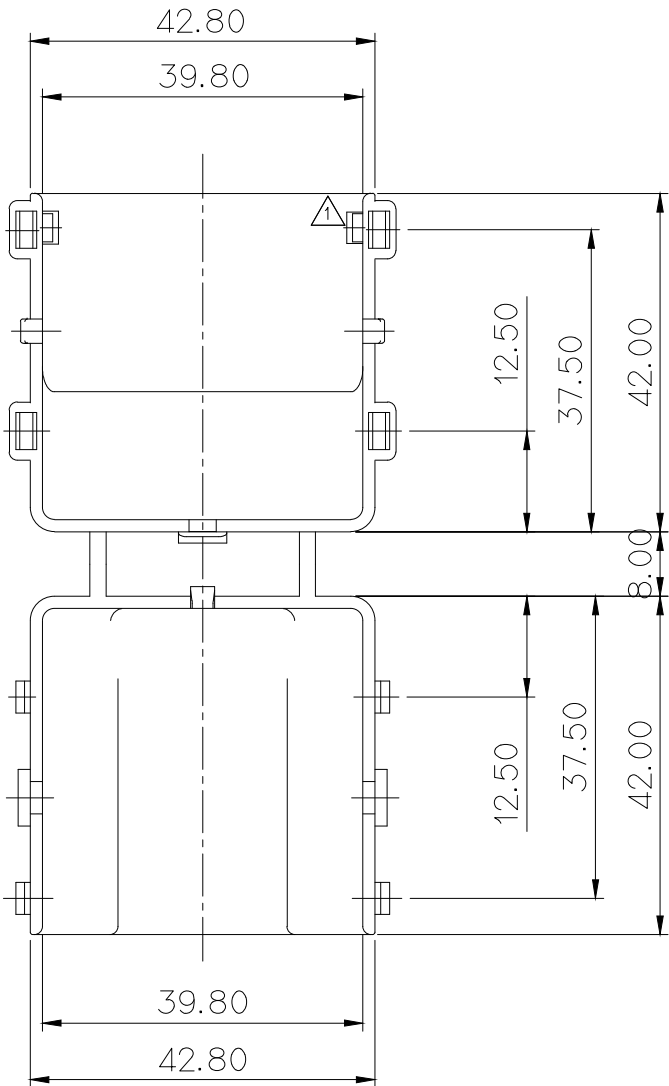


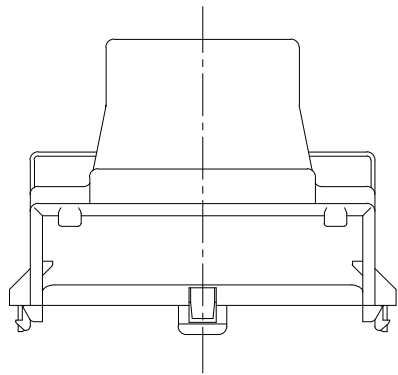

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시하지 않은 반경 R은 0.5로 한다
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG644051
- KET 문자 : 기울기 15°(H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : 기울기 0°(H: 0.1~0.2, SIZE: 2.0)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING: MG644051
- KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 2.0)
CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 2.0)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

					MATERIAL ② PP		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH BLACK			
②	설계사양변경(R0-S9034)근거 도면 제작성	KDJ				WIRE RANGE	CLASS	02509187
①	설계사양변경(R0-S8135)근거 도면 제작성 (돌기부 삭제)	KDJ				INSULATION	TYPE	HYBRID
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG634050
DR. KDJ '08.04.24		CHK. LSY 4/24				PART NAME		
CHK.		APP. 4/25				HYBRID 43M WIRE COVER		