

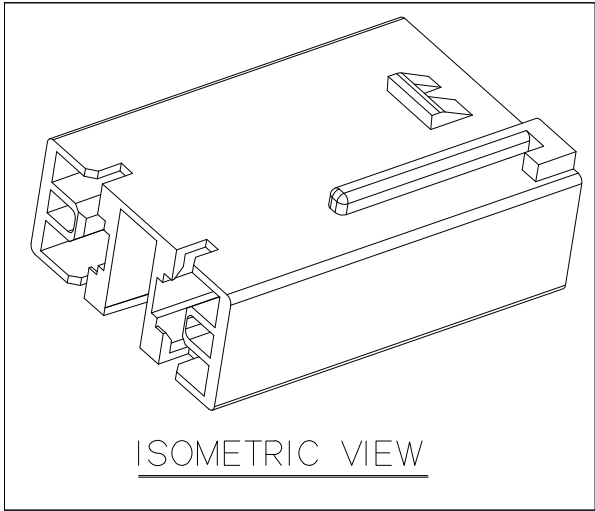
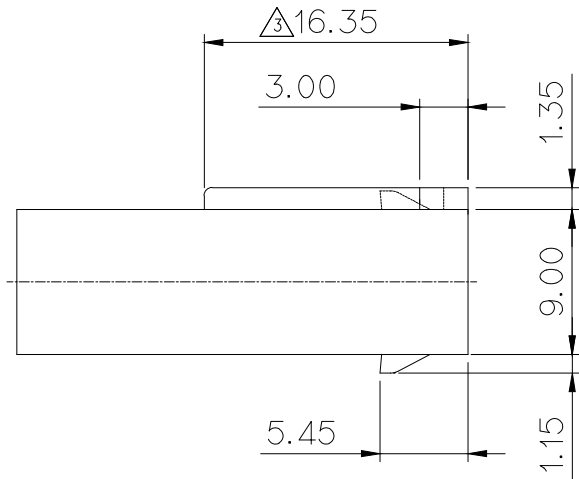


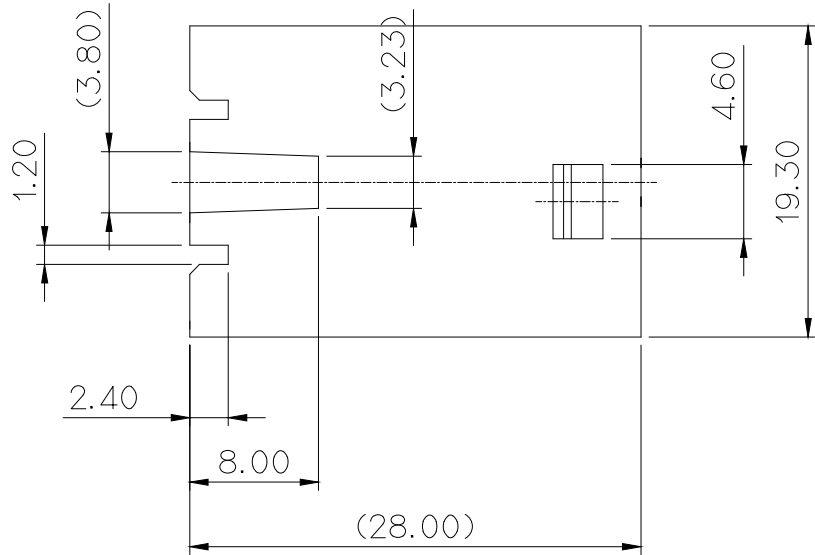

ISOMETRIC VIEW

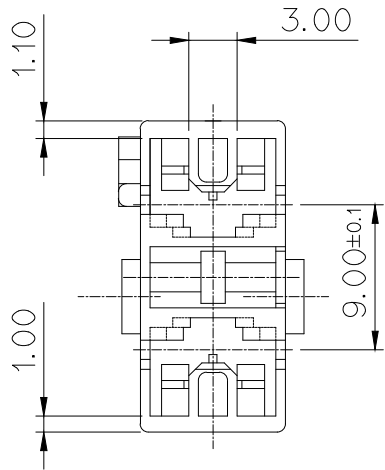


NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730570,0571,0572.,1016
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MG634882-1

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 단자 :ST730570,0571,0572,1016
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.
- 적용 R/HOLDER : MG634882-1

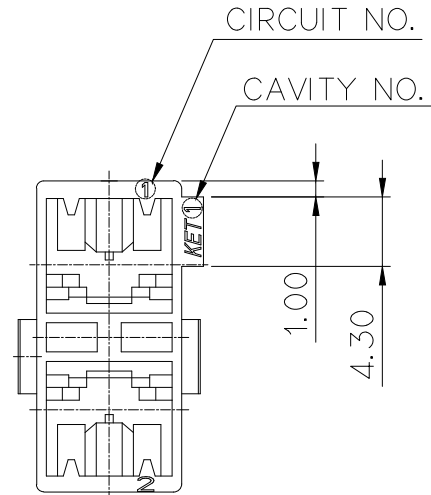

구분	COLOR
* 0	NATURAL
-1	RED
-2	BLUE
* -3	YELLOW
-4	GRAY
-5	BLACK

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL Δ 1 PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH Δ 2 SEE TABLE			
Δ 3	ECO-1510-027 근거 도면 재작성	SMG	KSH	BUC	'15.09.09	WIRE RANGE		CLASS	.250
Δ 2	ECO-1507-094 근거 도면 재작성	SMG	KSH	BUC	'15.07.06	INSULATION		TYPE	P-LOCK
Δ 1	ECO-1409-113 근거 도면 재작성	LCM	KSH	BUC	'14.09.19	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE	2/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG 634107T	
DR.	LCM 2010.06.08	CHK.	KSH	2010.06.08		PART NAME			
CHK.	 2010.06.09	APP.	BUC	2010.06.09		250 P-LOCK 2P HOUSING (9mm) NOISE FILTER			