

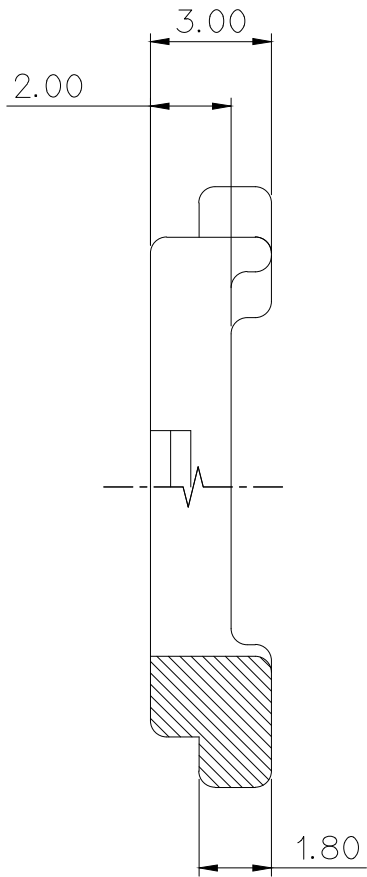
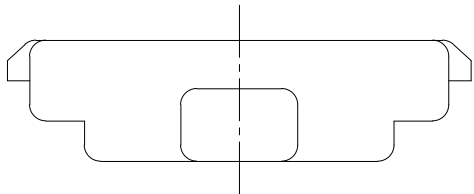
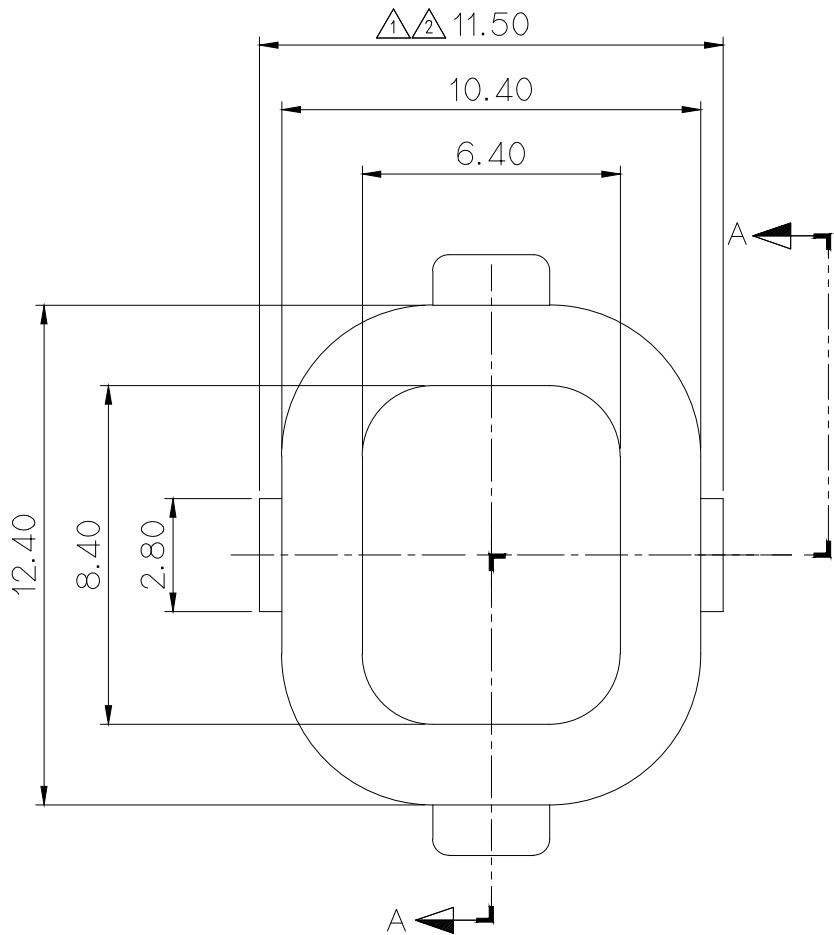


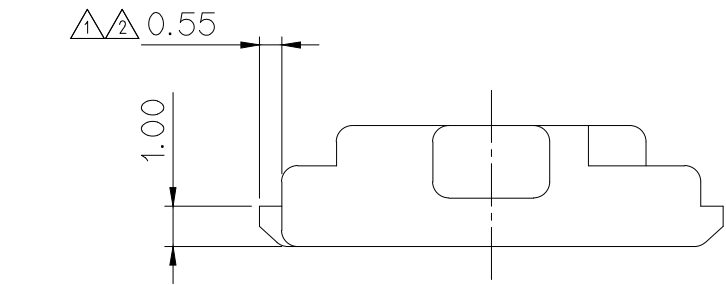

SECTION A-A

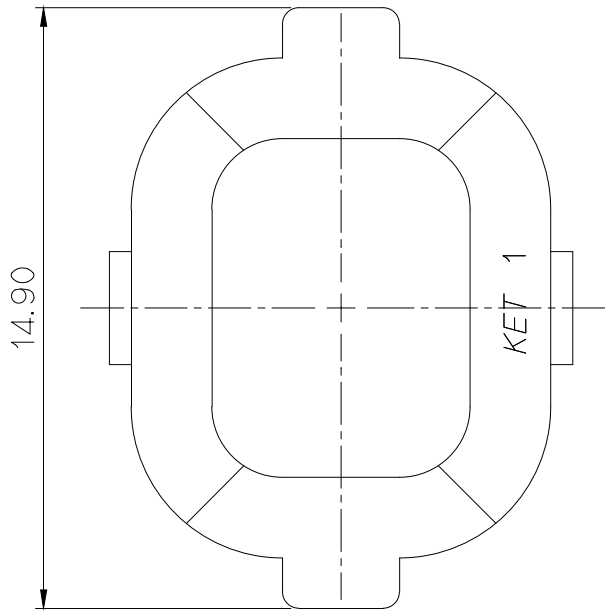

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.4 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG624130
APPLICABLE SEAL(4P) : MG684132
APPLICABLE SEAL(6P) : MG684133
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.4로 한다
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG624130
적용 SEAL(4P) : MG684132
적용 SEAL(6P) : MG684133
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	BLACK	
						WIRE RANGE		CLASS SP WP(58V)
						INSULATION		TYPE 7157-6565
						LTR	REVISION RECORD	PART NO. MG634131
						DR.	H.S.KIM 07/07	
						CHK.		
						APP.		
						DATE		
						TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1
						PART NAME	SP WP 6F/4F REAR HOLDER(58V)	