



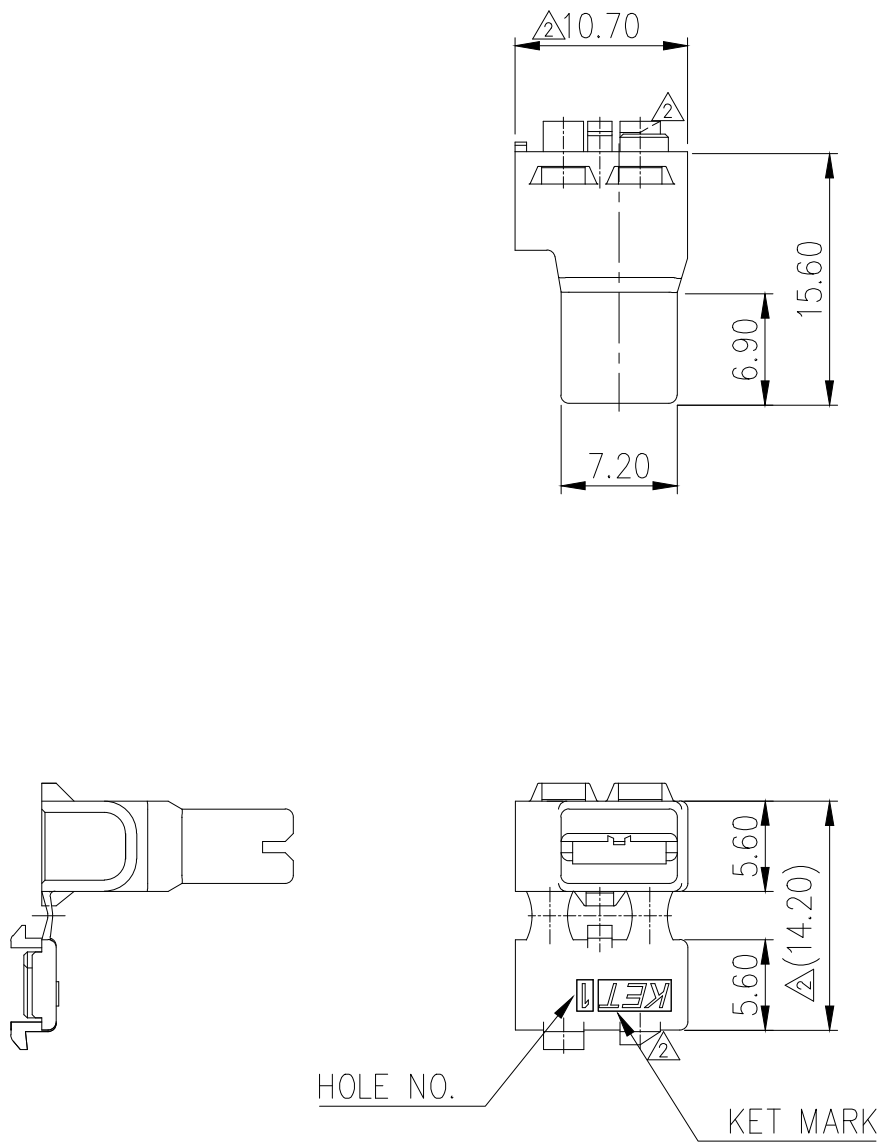

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±95	0.1	



주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL : ST731079-3
- 4.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2- 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL : ST731079-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

PART NO. ※표시는 색상 표기 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

					MATERIAL PET+PC(G.W.I.T)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE		CLASS .187	
					INSULATION		TYPE P-LOCK	
	ECO-1812-147근거 도면 재작성			KHG	'18.12.11			
	ECO-1711-249근거 도면 재작성			BUC	'17.11.20			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1
DR. P.J.M '08.09.30		CHK.			'08.10.01	PART NO.  MG634151T-*01		
CHK.		APP.			'08.10.01	PART NAME 187 P-LOCK FLAG 1P HS'G (HINGE)		

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK