
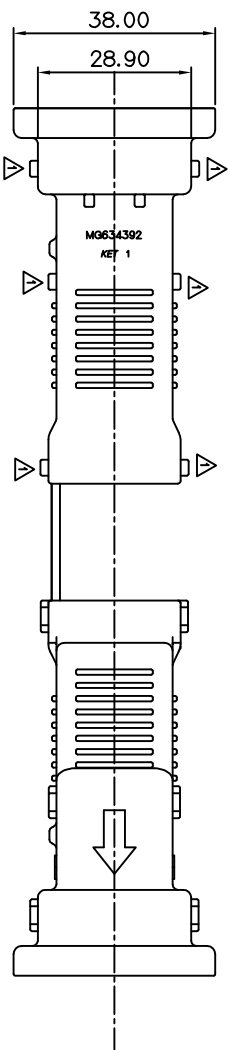

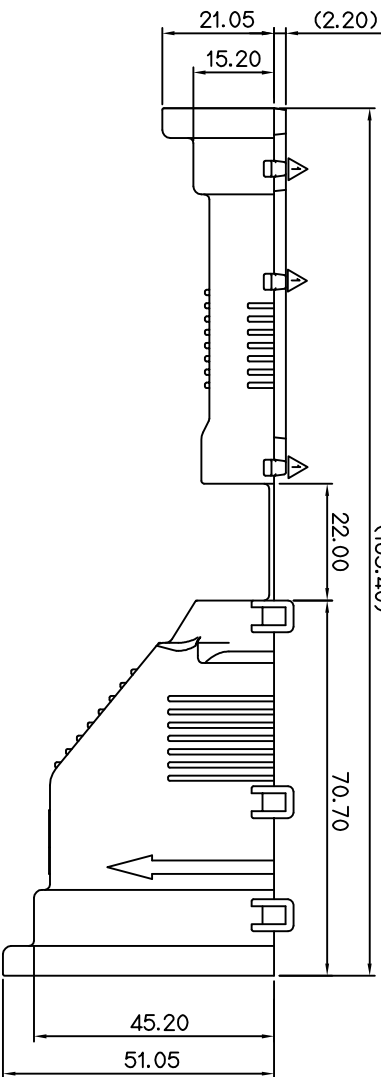



ISO VIEW

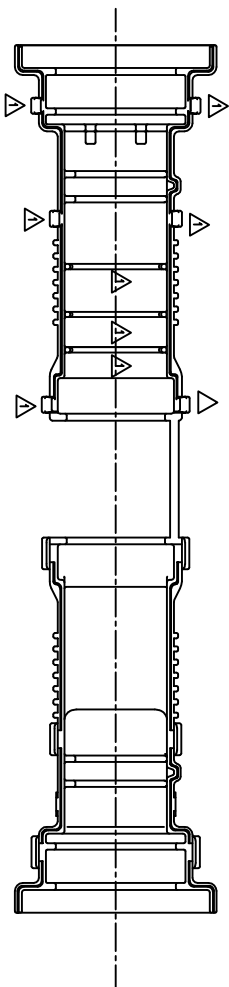

주 기

1. 적용 CONNECTOR : MG654391
2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. APPLICABLE CONNECTOR : MG654391
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

ISSUE MARK	
------------	--

MATERIAL		PP
FINISH		BLACK
WIRE RANGE		
INSULATION		
CLASS		
TYPE		
PART NO.		MG634392
SCALE		1/1
SEE TABLE		
PART NAME		FRONT DOOR 45M REAR COVER
DR.	SHIN,S.H '09.08.20	CHK. J.Y.S '08/20
CHK.	08/20	APP. 08/20