

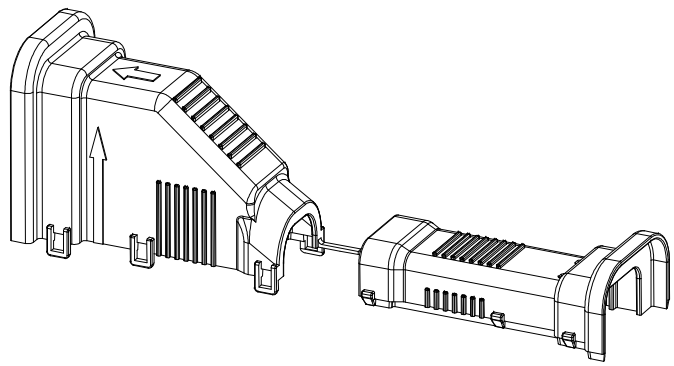
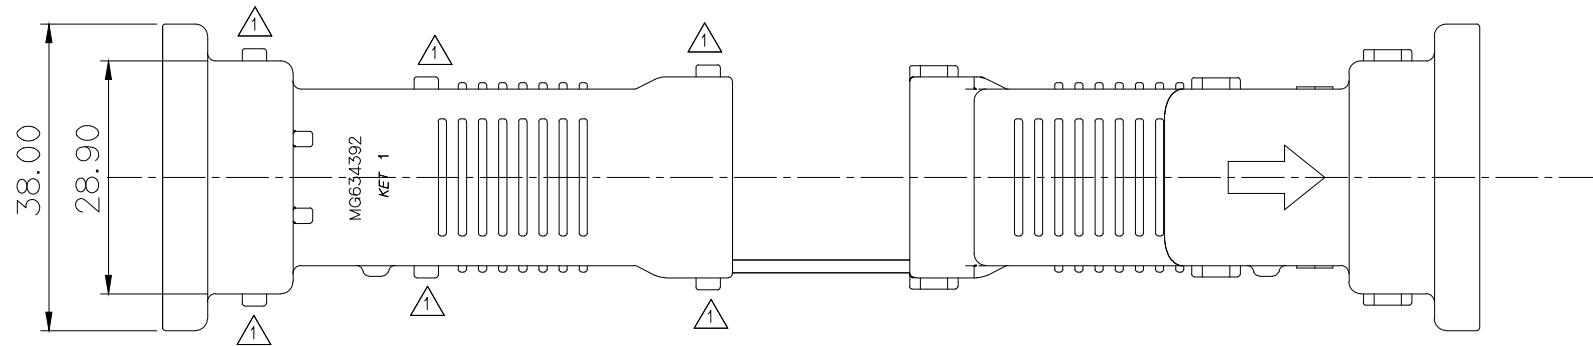
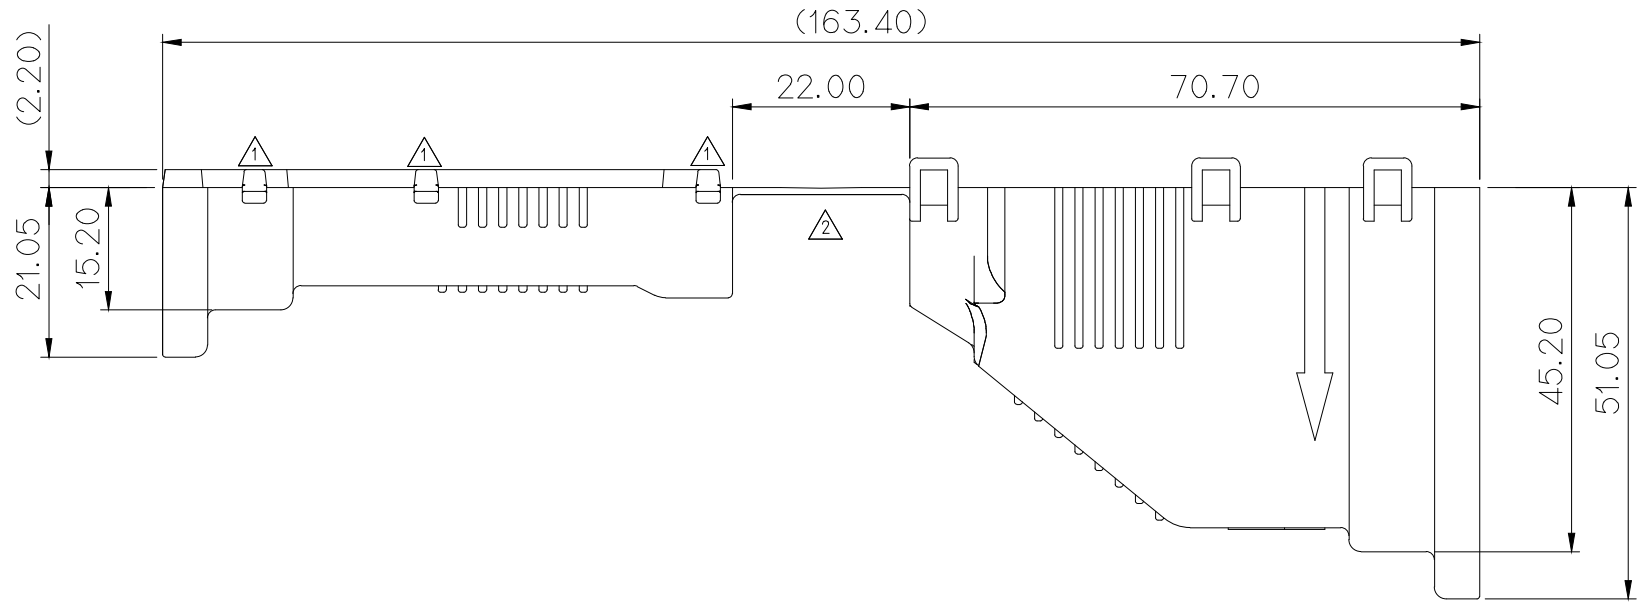


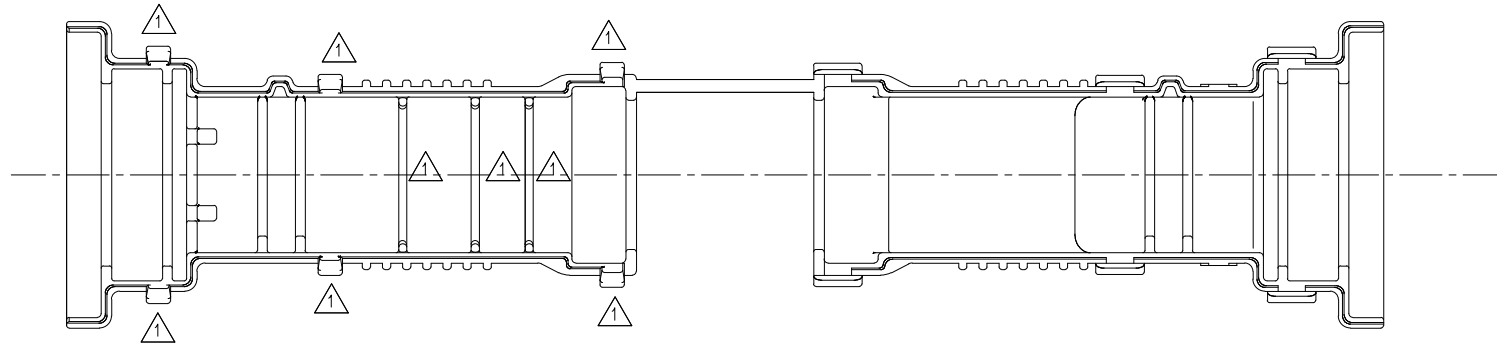

ISO VIEW

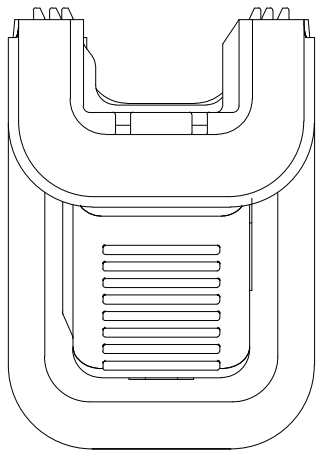

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 적용 CONNECTOR : MG654391
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- APPLICABLE CONNECTOR : MG654391
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION,PREScribed UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

						MATERIAL	PP	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	BLACK		
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG634392
	DR. SHIN.S.H '09.08.20		CHK.	J. Y. S	08/20		PART NAME		
CHK.	 08/20		APP.		08/20		FRONT DOOR 45M REAR COVER		