


GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30°	0.1

No.		MATERIAL	COLOR
0		PBT(V0)	NATURAL
1			RED
2			BLUE
3			YELLOW
40			DARK GRAY
41			LIGHT GRAY
5			BLACK
6			DARK GREEN
7			BROWN
8			LIGHT GREEN
9			MAGENTA
11			ORANGE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG610224S,MG620426S
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTION & RoHS REGULATION

1. 기능상유해한 BURR 및 WELDLINE 등이 없을것.
2. 적용 하우징 : MG610224S, MG620426S
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

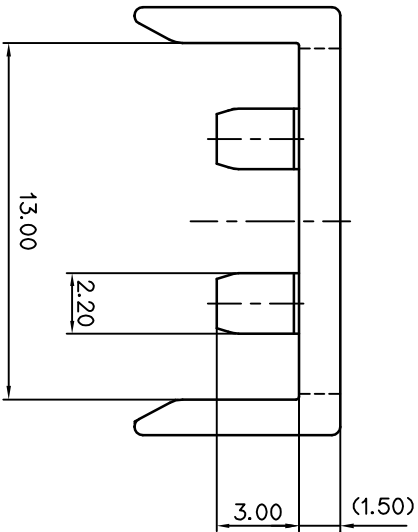

				MATERIAL	SEE TABLE	KETTM KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE		
				INSULATION	TYPE	
LTR	REVISION RECORD	DR.	CHEK.	APP.	DATE	
DR.	OKS 08.09.18	CHEK.				
CHEK.		APP.				
PART NAME						
1806 2P REAR HOLDER						