
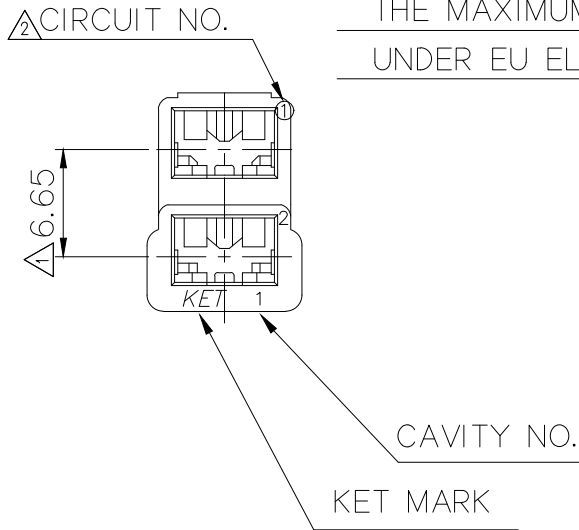
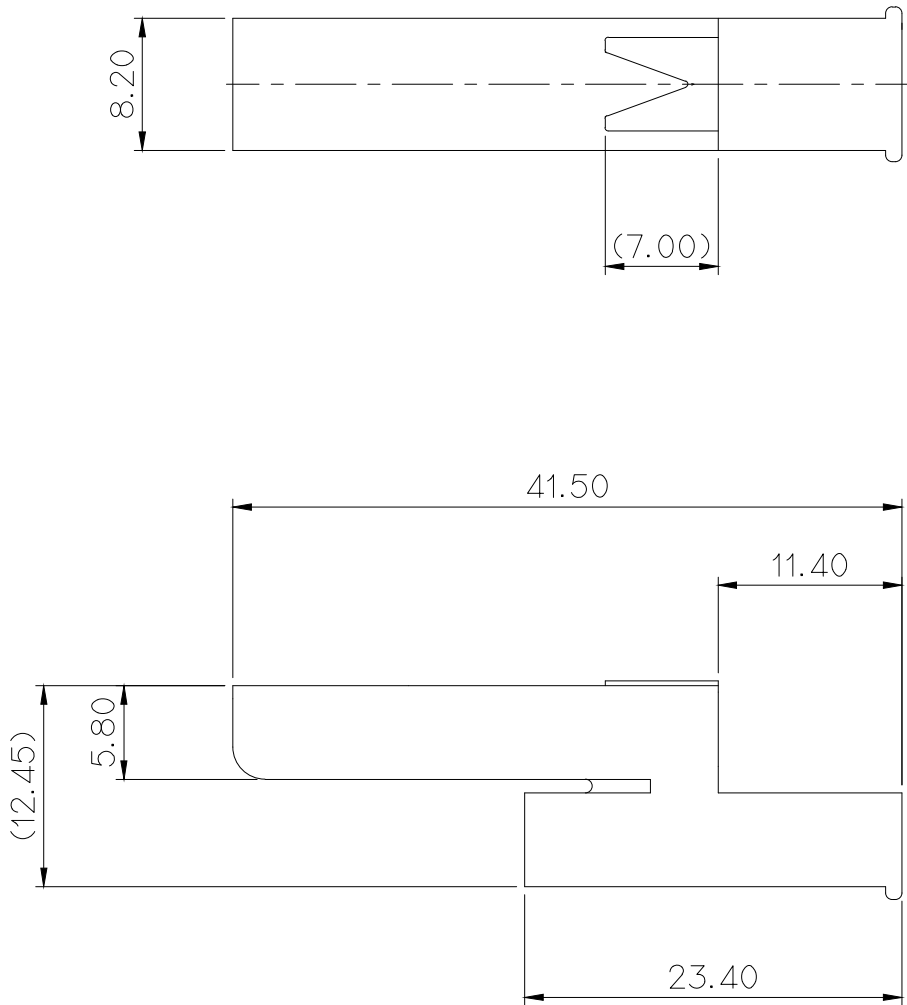


△2	NO.	COLOR
*	0	NATURAL
*	1	RED
	2	BLUE
	3	YELLOW
	4	GRAY
	5	BLACK
	6	GREEN



						MATERIAL	PA66(V0)		
						FINISH	△2SEE TABLE		
						WIRE RANGE		CLASS	
△2	ECO-2103-183의거 도면 제작성	YHJ	PSH	KSH	'21.03.12	INSULATION		TYPE	
△1	ECO-1611-330의거 도면 제작성	SMG	KSH	BUC	'16.11.21				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG634527
DR.	PSH 09.02.25	CHK.				PART NAME	187 P-Lock HOUSING 2P(MICRO S/W V0급)		
CHK.		APP.							

△ GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주기

- 기능상 유해한 BURR, WELDLINE 없을 것.
- 지시하지 않은 모든 R은 0.3R
- 적용 TERMINAL :ST730567, 568, 569
- △4.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPLICABLE TERMINAL :ST730567, 568, 569
- △4.10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2021-10-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

