

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것.
2. 지시하지 않은 모든 R은 0.3R
3. 적용 TERMINAL :ST730567, 568, 569
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBS,PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.





NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
3. APPLICABLE TERMINAL :ST730567, 568, 569
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. MG634529

CUSTOMER DRAWING

NO.	MATERIAL	COLOR
0	PA66(V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK

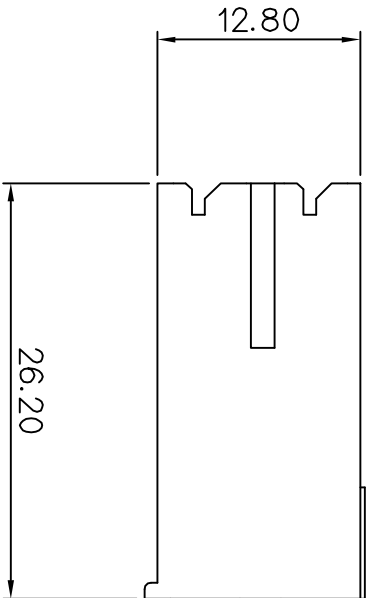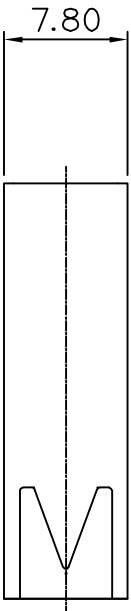

CAVITY NO.
KET MARK

ISSUE MARK

						MATERIAL	SEE TABLE	KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE			
						INSULATION			
								CLASS	
								TYPE	
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE AS NOTED	PART NO.
DR.	PSH	09.01.13		CHK.			SCALE 2/1	SEE TABLE	MG634529
CHK.				APP.			PART NAME	187 P-LOCK HS'G 2P (P=7mm V0급)	