

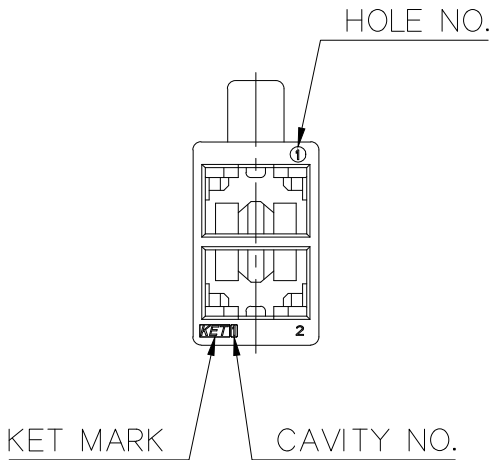
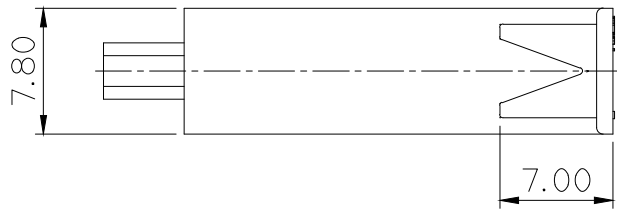
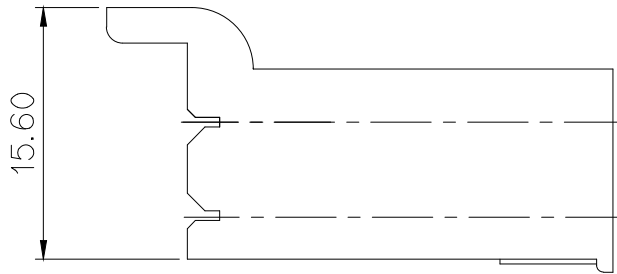
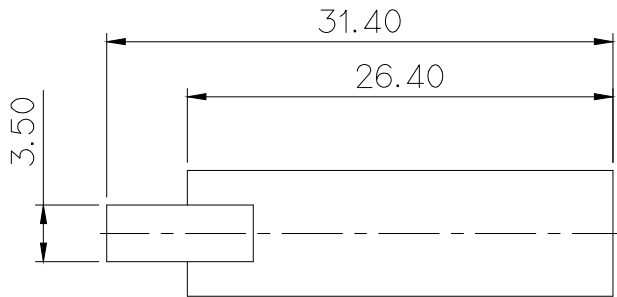




GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

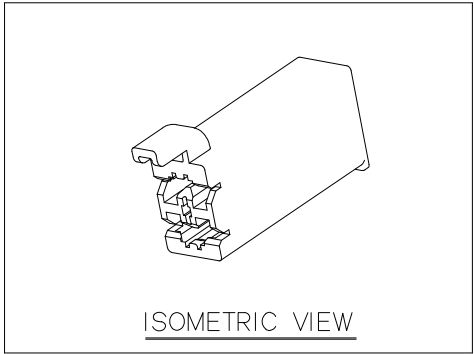

주기

- 기능상 유해한 BURR, WELDLINE 없을 것.
- 지시하지 않은 모든 R은 0.3으로 한다.
- 적용 TERMINAL :ST730567, 568, 569
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPLICABLE TERMINAL :ST730567, 568, 569
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

PART NO. *표시는 COLOR 명기 임.

NO.	COLOR
* 0	NATURAL
* 1	RED
* 2	BLUE
* 3	YELLOW
* 4	GRAY
* 5	BLACK
* 6	GREEN

						MATERIAL		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH			
						WIRE RANGE			
						INSULATION			
	ECO-1801-236 근거 도면 제작성	LCM	KSH	BUC	'18.01.16	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG634531T- *02
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME		
DR.	LCM '17.12.28		CHK.		PSH '17.12.28		187 P-LOCK 2P HOUSING(P=6.0mm)		
CHK.	KSH '17.12.28		APP.		BUC '17.12.28				