
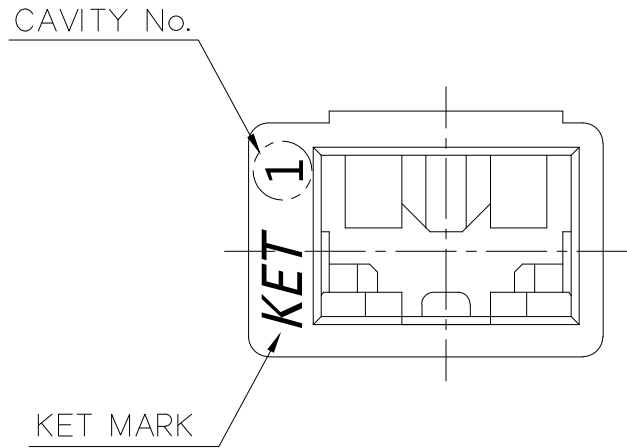
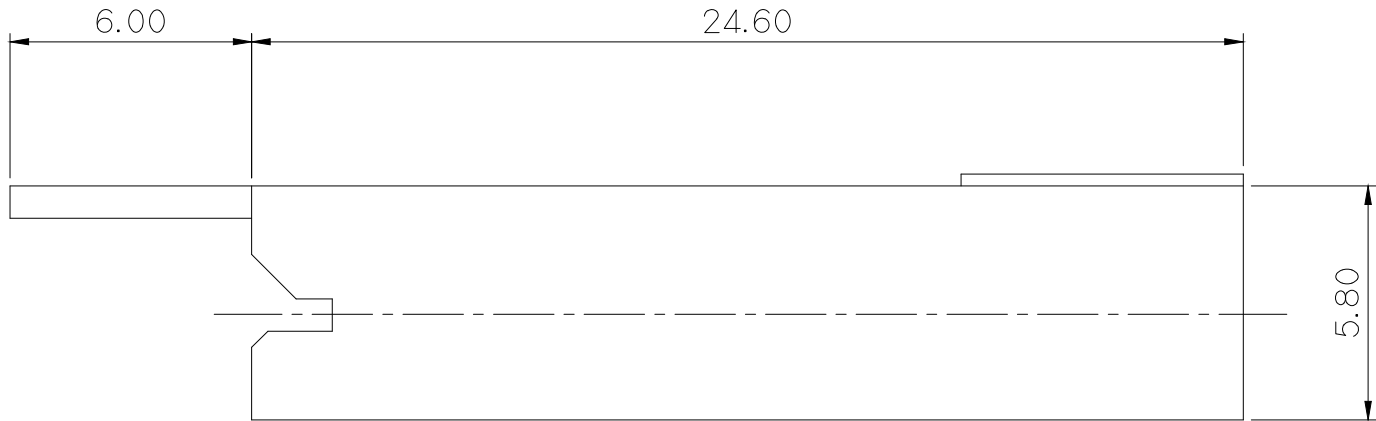
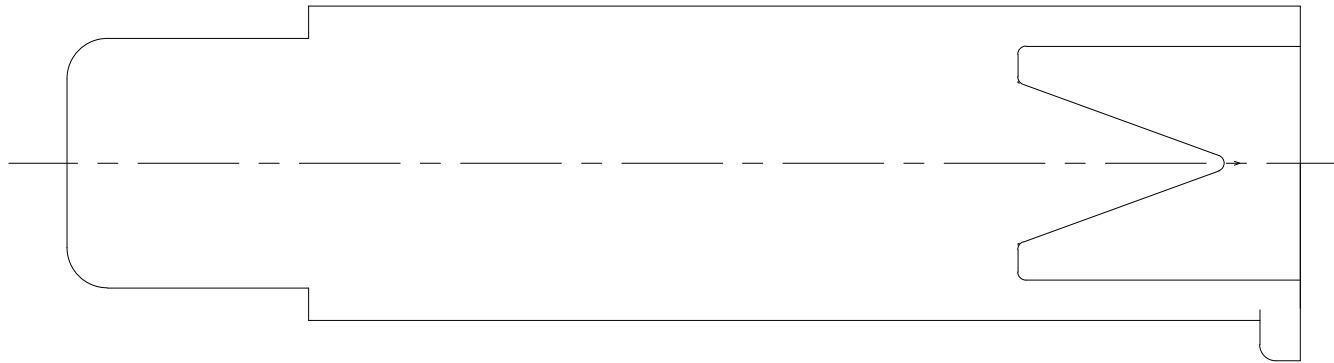


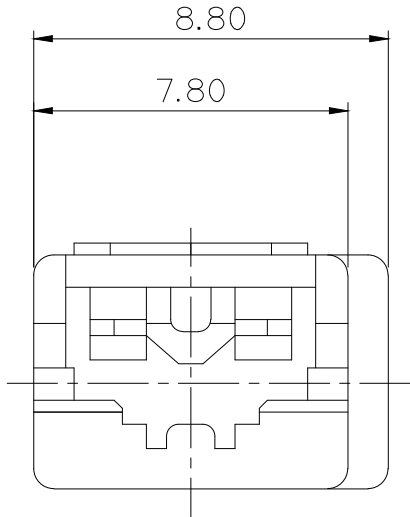

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPLICABLE TERMINAL :ST730567, 568, 569
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주기

- 기능상 유해한 BURR, WELDLINE 없을 것.
- 지시하지 않은 모든 R은 0.3R
- 적용 TERMINAL :ST730567, 568, 569
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

PART NO. *표시는 색상 표기 임.


NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL		PET+PC(GWIT)			KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		SEE TABLE			
					WIRE RANGE					
					INSULATION					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG634532T-01
DR. LYS '17.11.01			CHK. PSH '17.11.01			PART NAME				
CHK. KSH '17.11.01			APP. BUC '17.11.01			187 P-LOCK 1P HOUSING (보호 GUIDE)				