

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것.
2. 지시하지 않은 모든 R은 0.3R
3. 적용 TERMINAL :ST730567, 568, 569
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBS,PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.





NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
3. APPLICABLE TERMINAL :ST730567, 568, 569
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. MG634533

CUSTOMER DRAWING

NO.	MATERIAL	COLOR
0	PA66(V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK

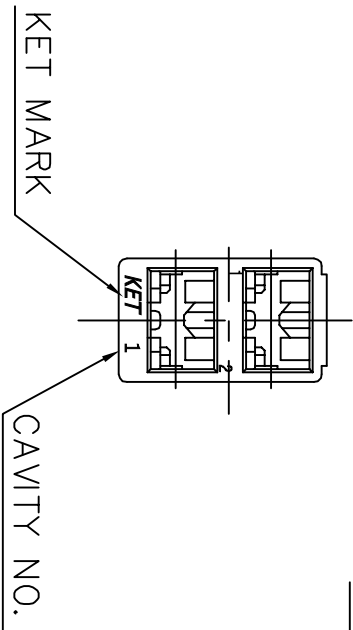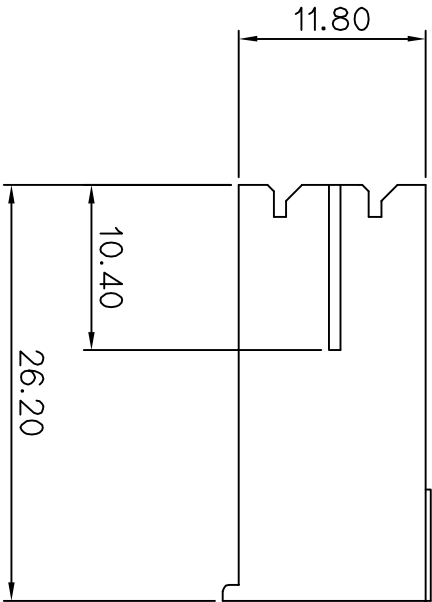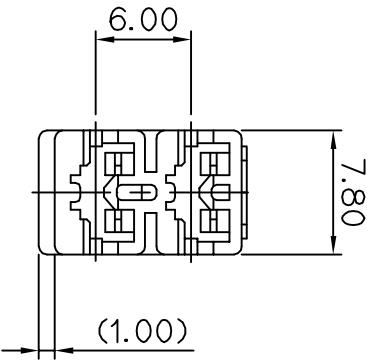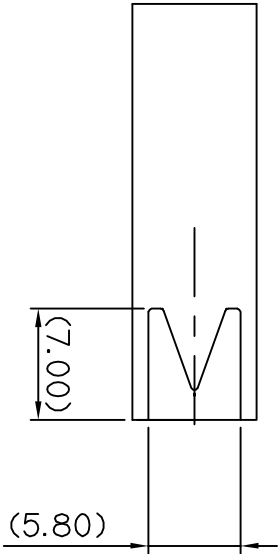

ISSUE MARK

						MATERIAL	SEE TABLE	KIEIT KOREA ELECTRIC	
						FINISH	SEE TABLE	ENGINEERED TERMINAL CO., LTD.	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG634533
DR.	PSH 09.01.13	CHK.				PART NAME	187 P-LOCK 2P HOUSING (P=6mm V0급)		
CHK.		APP.							