
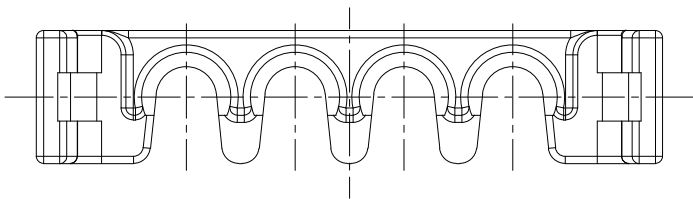

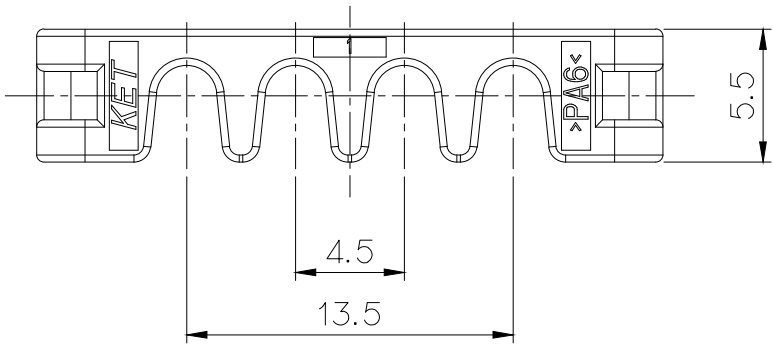
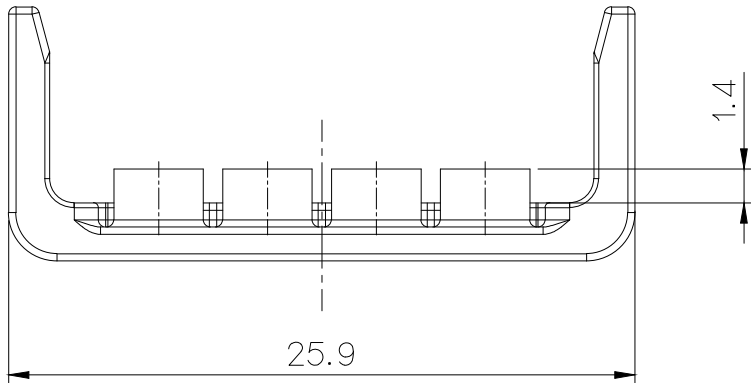


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

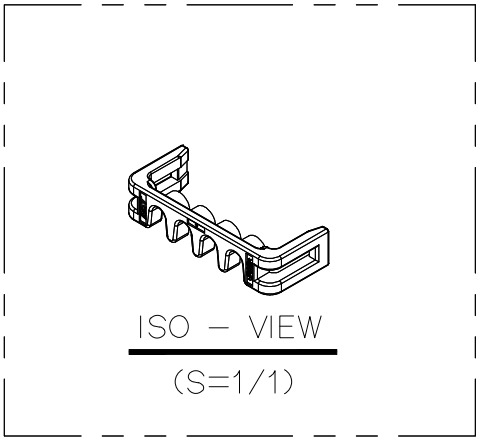

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR : MG644170

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 3

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.	REMARKS
1	GS 150 WP 4F REAR HOLDER	MG634547-2	PA6	BLUE	1	

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH		SEE TABLE				
					WIRE RANGE				CLASS	GS 150	
					INSULATION				TYPE		
	RELEASED	JES	BHS		16.DEC.'08	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 3/1	PART NO.	MG634547-2	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE						
DR.		CHK.									
CHK.		APP.									
						PART NAME					GS 150 WP 4F REAR HOLDER