

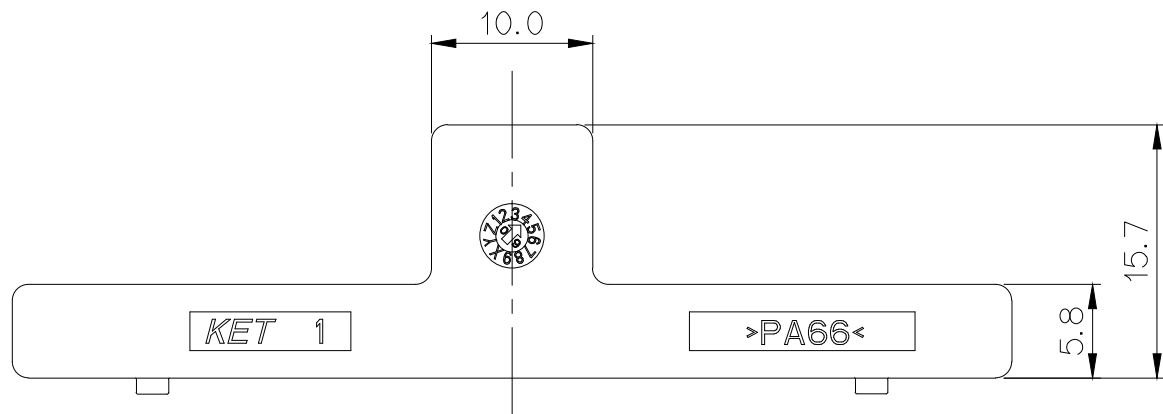
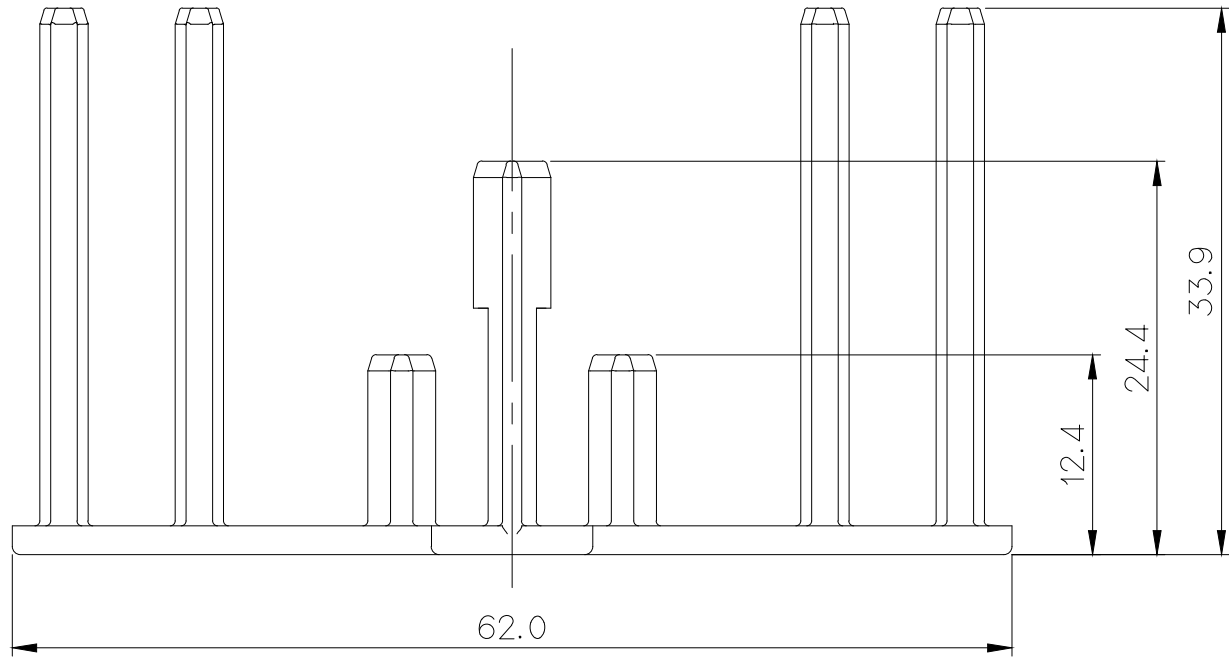
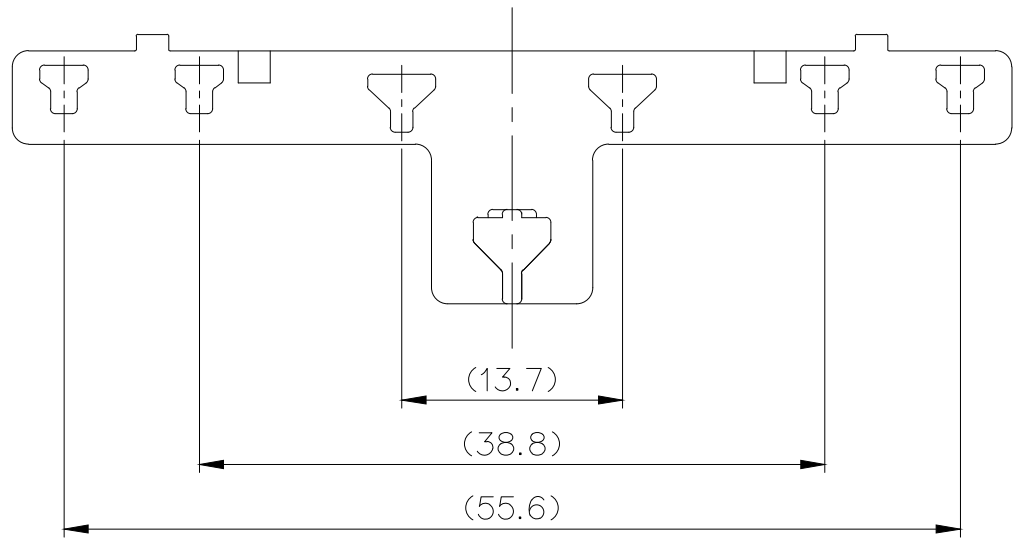


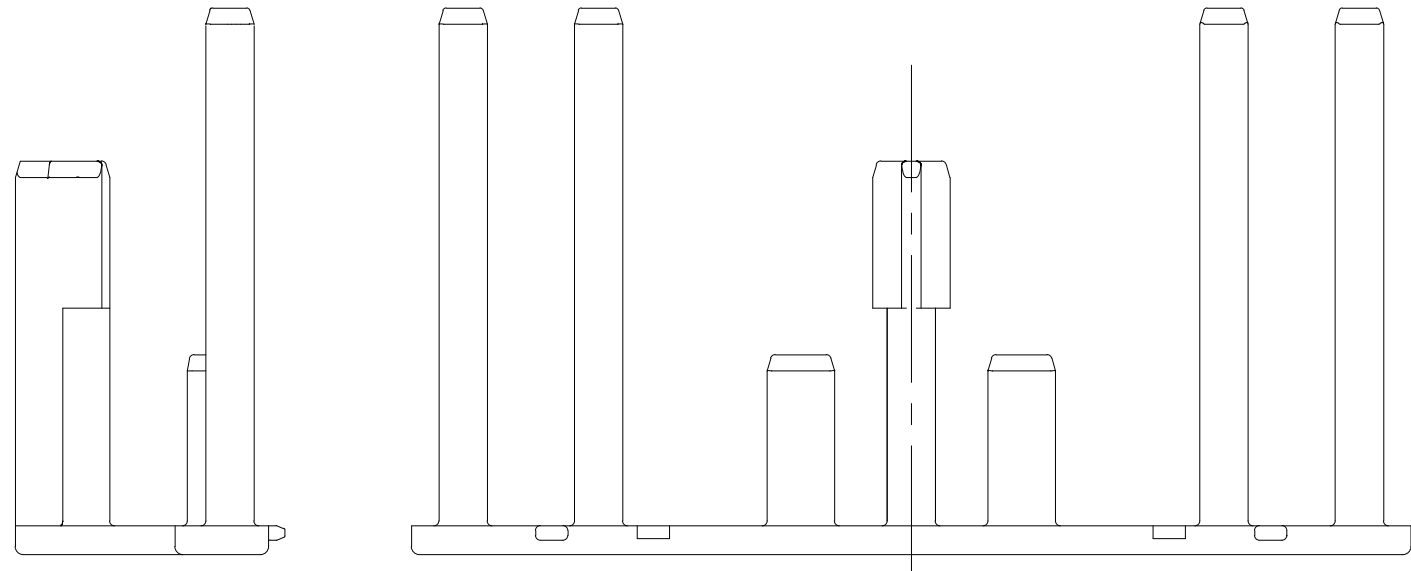

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG674610-5
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

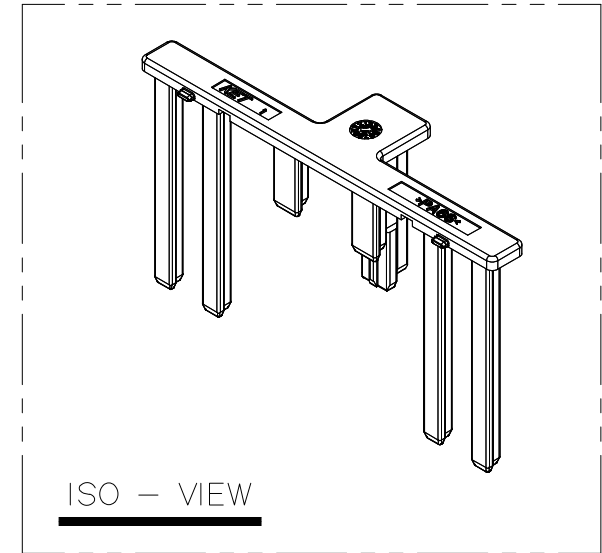

주 기


- 1.지시하지 않은 반경 R은 0.3로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 HOUSING : MG674610-5
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-02-16

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 3

ISSUE MARK

					MATERIAL PA66		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH RED				
					WIRE RANGE 			CLASS Body-IP 68P	
					INSULATION 			TYPE 	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	BJG. 08.SEP.2010		CHK.				SEE TABLE	2/1	MG634611-1
CHK.				APP.			PART NAME Body-IP 68M TPA		