
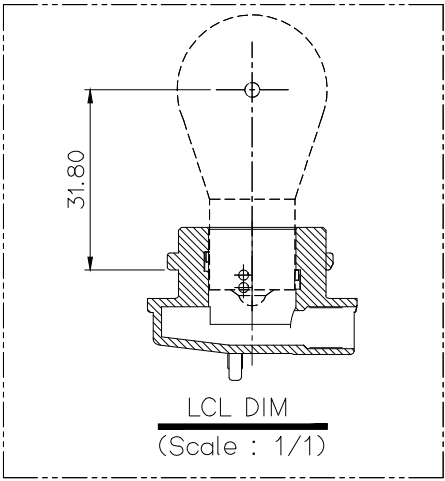
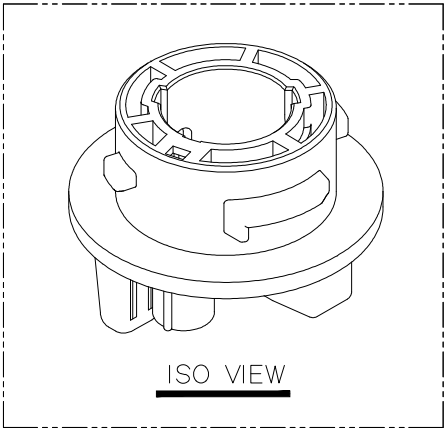
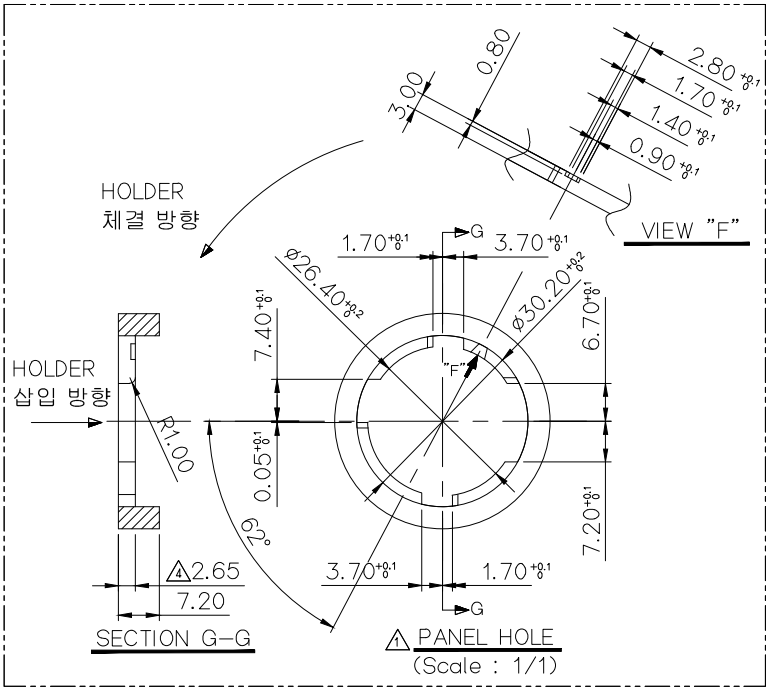



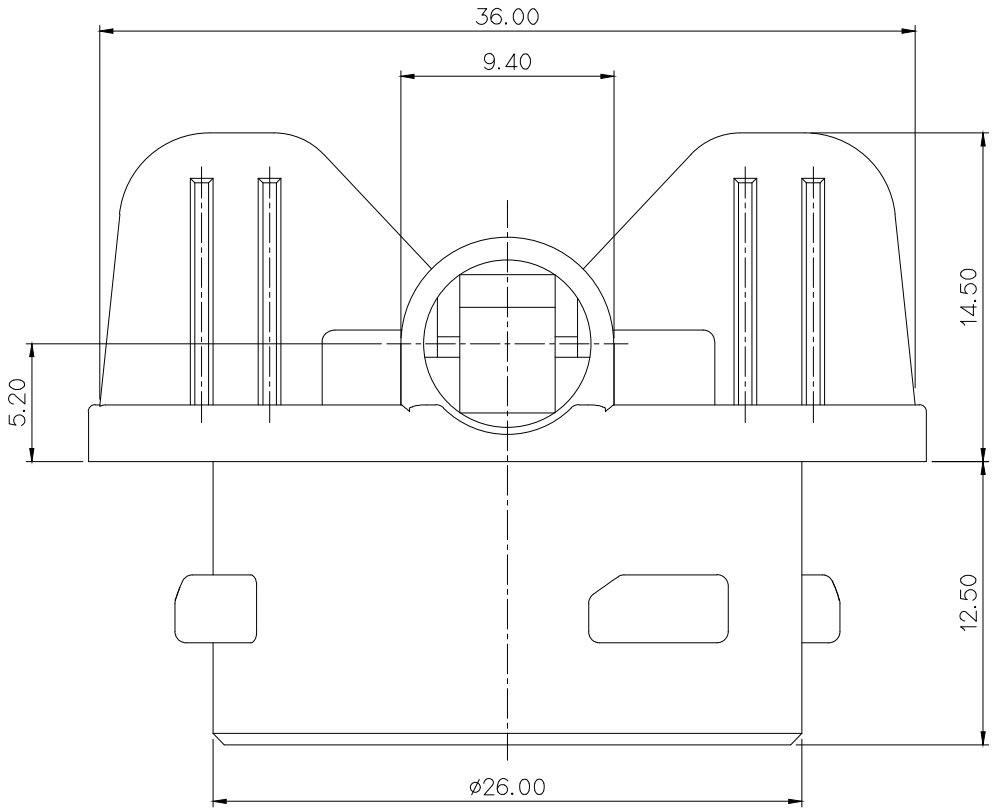


주 기

- 1.지시하지 않은 반경 R은 0.5 로 한다
- 2.지시하지 않은 모따기 C는 0.5으로 한다.
- 3.SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
- 4.적용 TERMINAL : ST760794-1(P), ST760795-1(E)
- 5.적용 GASKET SEAL : Δ R600104
- 6.적용 WIRE SEAL : MG682027(P), MG682028(E)
7. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
- 4.APPLICABLE OF TERMINAL ST760794-1(P), ST760795-1(E)
- 5.APPLICABLE OF SEAL GASKET : Δ R600104
- 6.APPLICABLE OF WIRE SEAL : MG682027(P), MG682028(E)
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

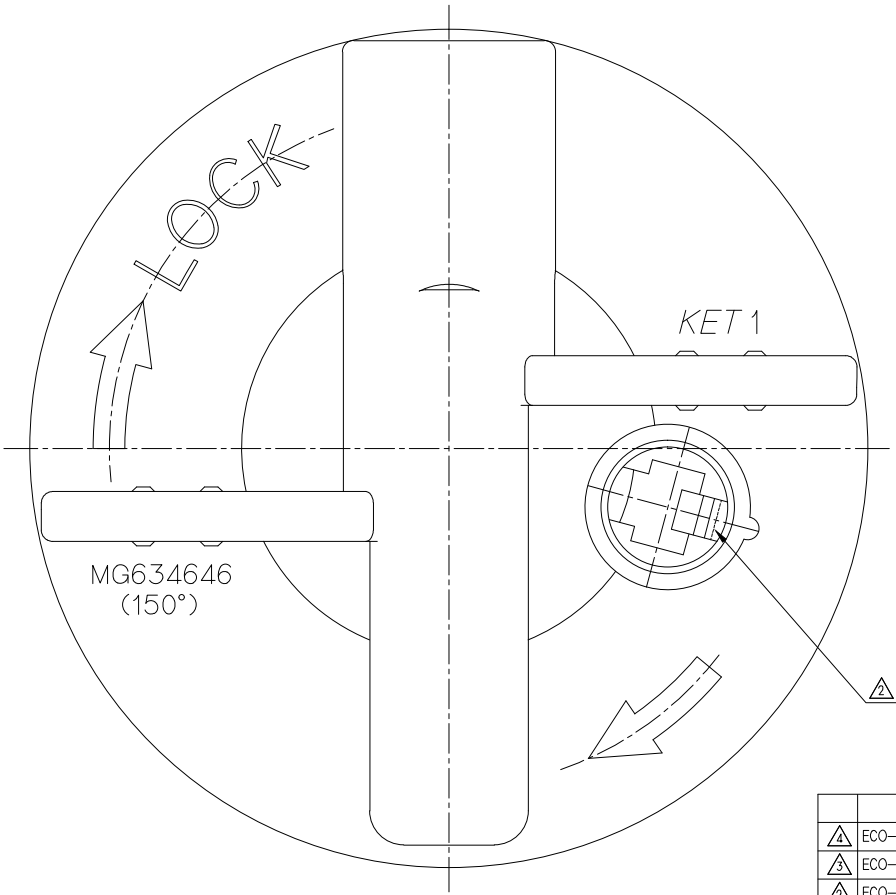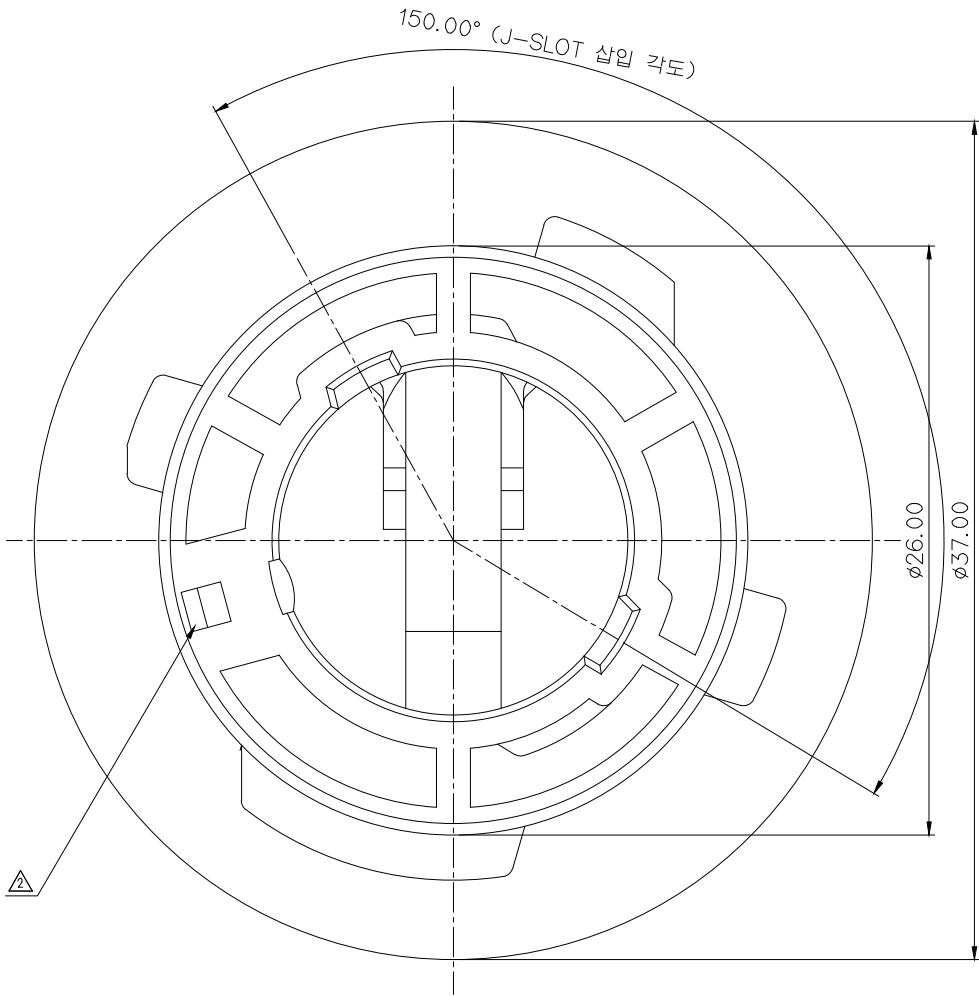

NO.	MATERIAL	COLOR
0	PA66+MR30%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
Δ * 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2021-10-20

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

	ECO-2104-256 근거 도면 재작성		CJH	21.04.28	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., L	
	ECO-2008-107 근거 도면 재작성		CJH	20.08.12	FINISH	SEE TABLE		
	ECO-1708-302 근거 도면 재작성		CJH	17.08.24	WIRE RANGE		CLASS	
	ECO-1406-110 근거 도면 재작성		BIN	14.06.16	INSULATION		TYPE	
LTR	REVISION RECORD		APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 4/1	PART NO. MG634646
DR.	CDH 2009.07.29	CHK.	LSY	2009.07.29	PART NAME			
CHK.		APP.	KKJ	2009.07.29	RCL Bulb Holder WP Single (150°)			