



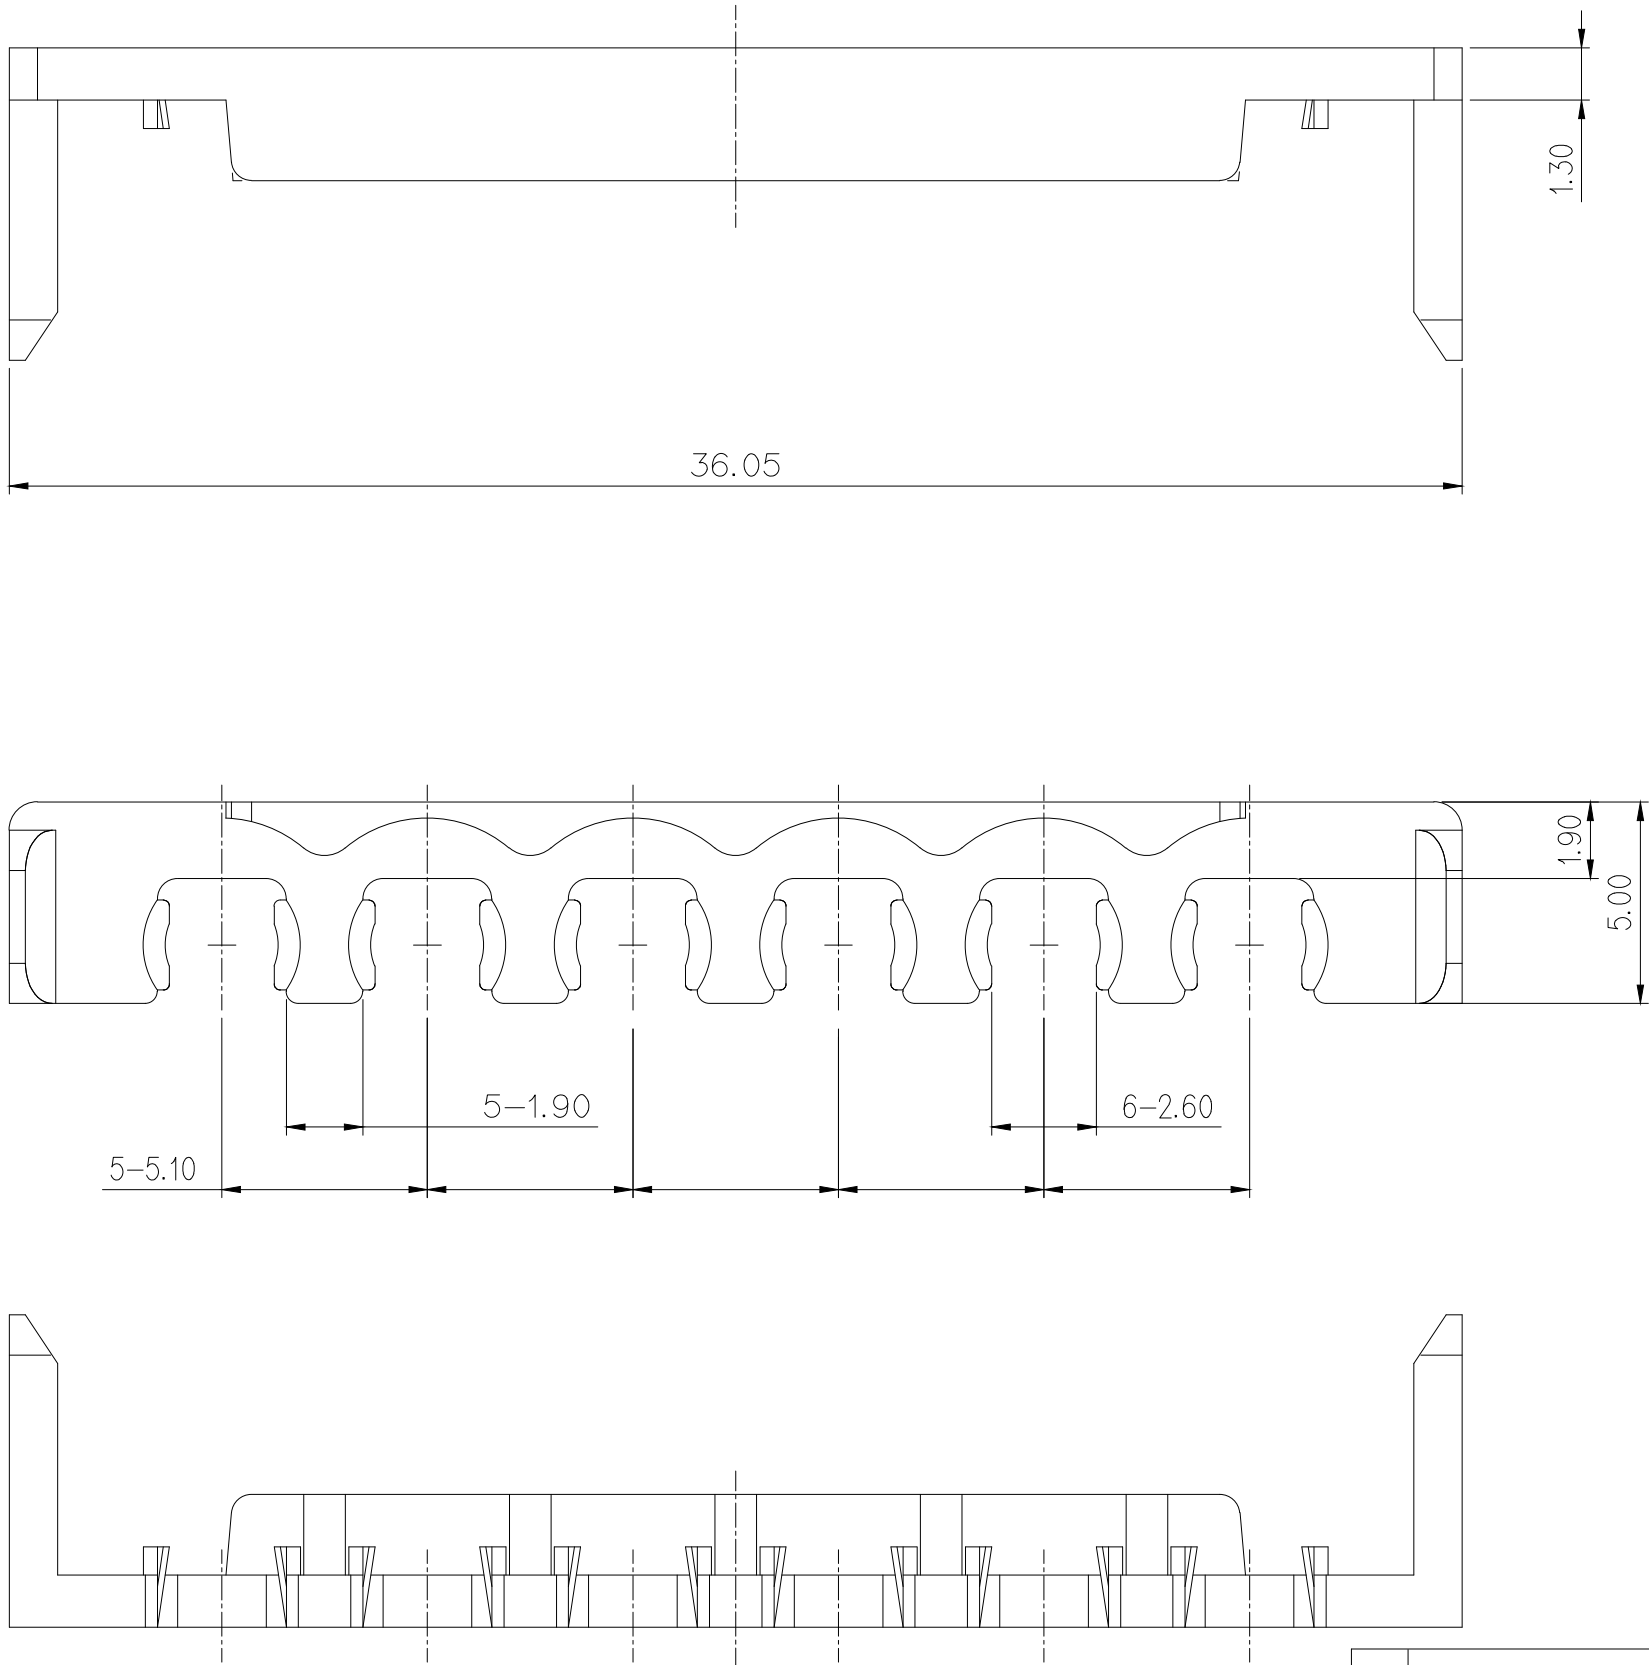

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

- NOTE
- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 – 0.3 RADIUS.
 - 2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - 3. APPLICABLE HOUSING : MG624693,4,MG654696
 - 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

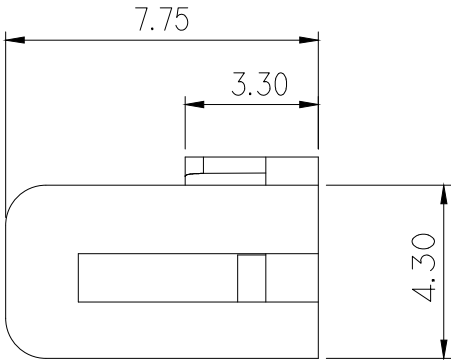

- 주 기
- 1.지시하지 않은 반경 R은 0.2 – 0.3로 한다
 - 2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
 - 3.적용 ITEM HOUSING: MG624693,4,MG654696
 - 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

					MATERIAL		PA66	 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH		BLUE				
					WIRE RANGE		CLASS				
					INSULATION		TYPE				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO.	MG634697	
DR.		KSH '09.05.07	CHK.		D:\TTTT\GSH\YTT.jpg			PART NAME			WP(050) 12P REAR-HOLER
CHK.			APP.		D:\TTTT\GSH\YTT.jpg						