
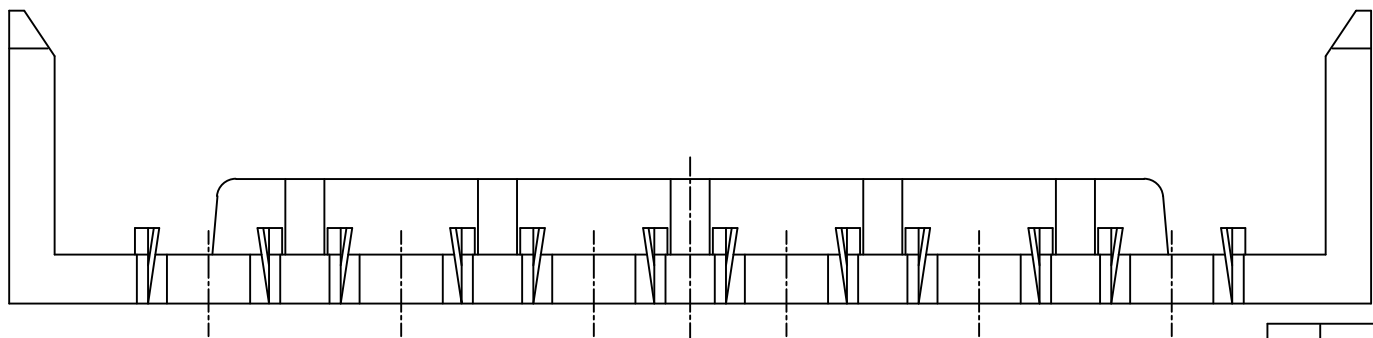
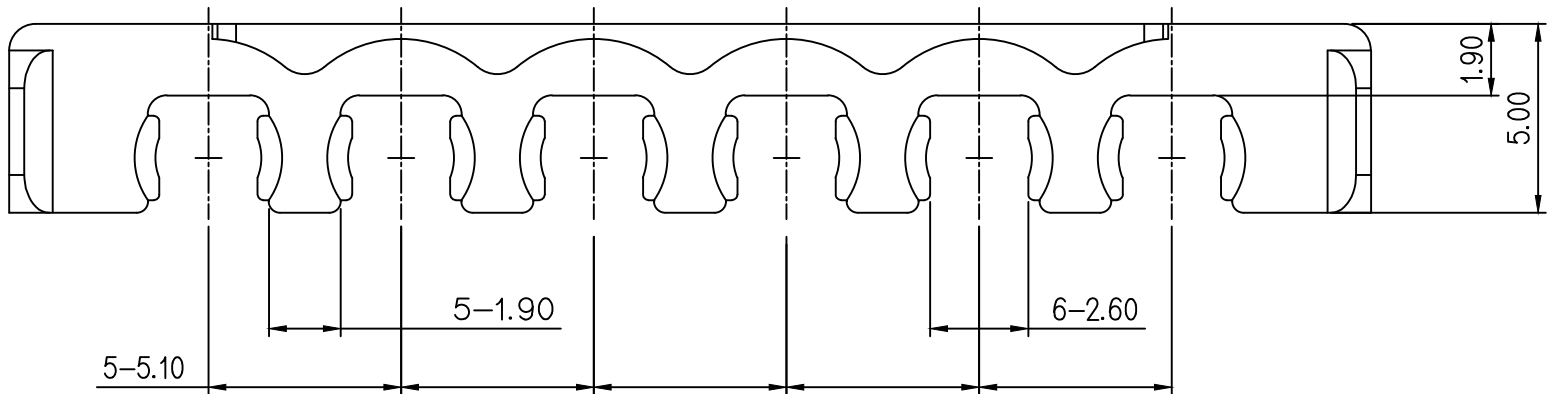


PART NO. MG634697

CUSTOMER DRAWING

DIMENSIONS IN MM)

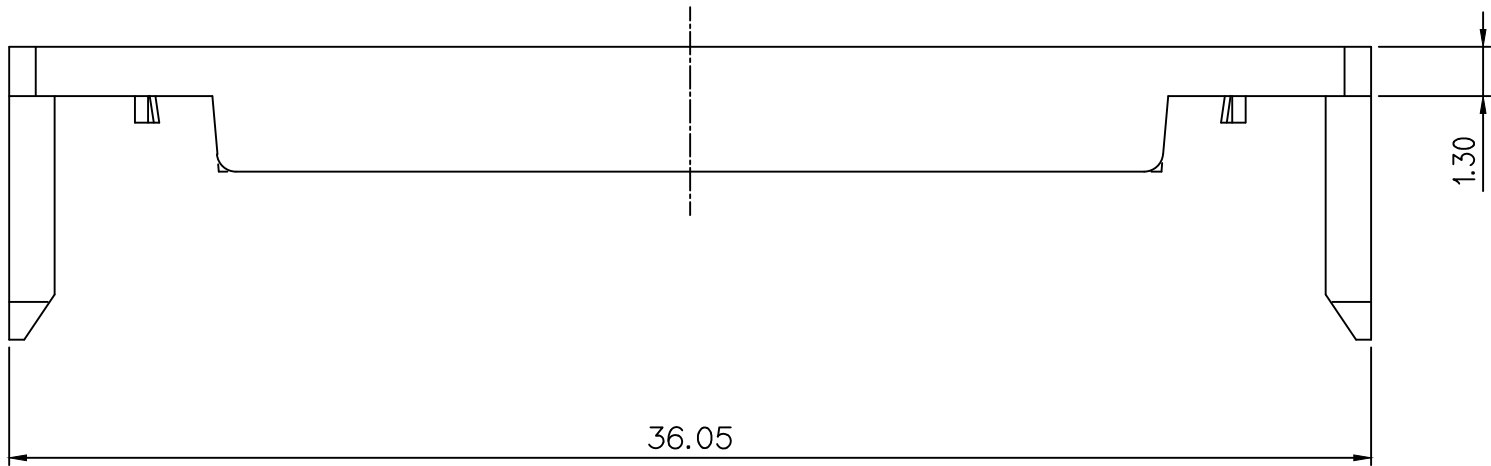

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 – 0.3 RADIUS.

2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.

3. APPLICABLE HOUSING : MG624693,4,MG654696

4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

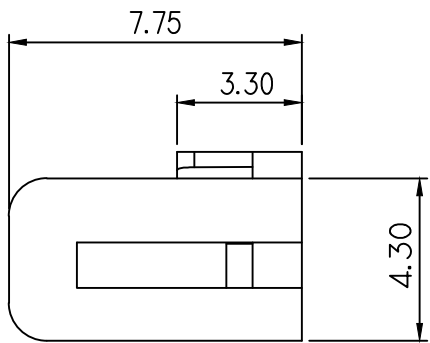

주 기

1.지시하지 않은 반경 R은 0.2 – 0.3로 한다

2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.

3.적용 ITEM HOUSING: MG624693,4,MG654696

4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK	
------------	--

					MATERIAL PA66		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH BLUE			
					WIRE RANGE			CLASS
					INSULATION			TYPE
LTR	REVISION RECORD		DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG634697
DR. KSH '09.05.07		CHK.			PART NAME			
CHK.		APP.			WP(050) 12P REAR-HOLER			