


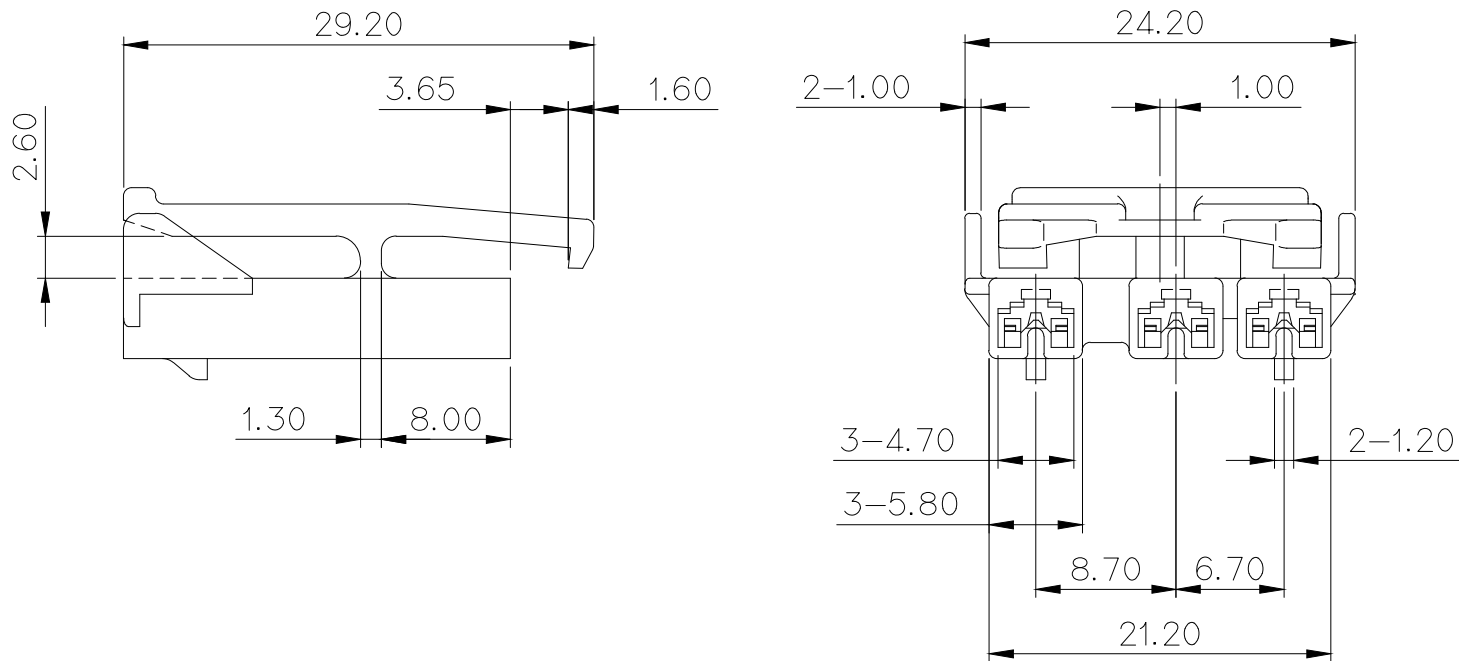

NOTE




1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2- 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST731173-3/1217-3
APPLICABLE R/HOLDER: MG634708-1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표시는 색상 표기 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

*

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

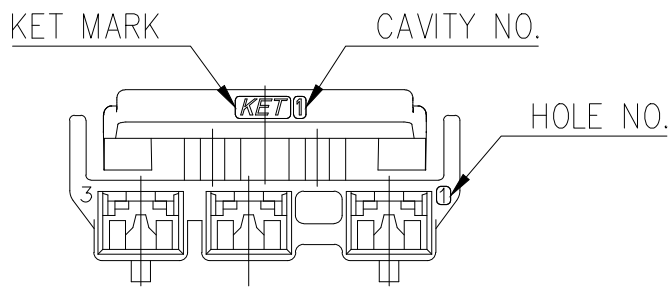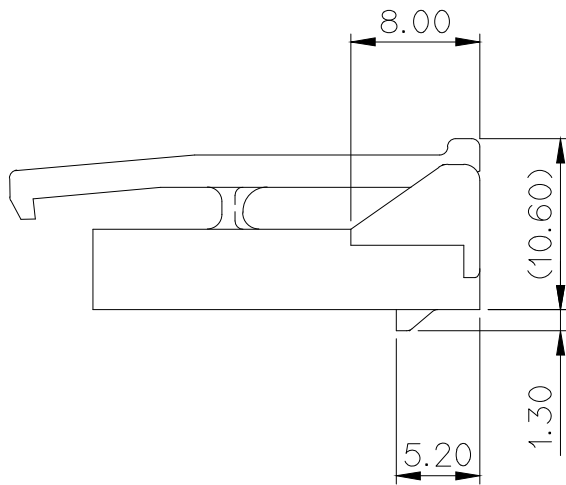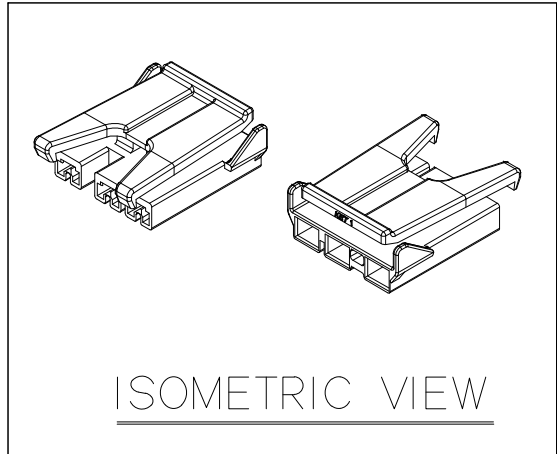

주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL:ST731173-3/1217-3
적용 R/HOLDER: MG634708-1
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL		PET+PC(G.W.I.T)			KOREA ELECTRIC	
						FINISH		SEE TABLE			TERMINAL CO., LTD.	
						WIRE RANGE					CLASS	
						INSULATION					TYPE 110 P-LOCK	
	ECO-1711-145 근거 도면 재작성	LCM	KSH	BUC	17.11.13	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				2/1	MG634707T-03		
DR. P.J.M '09.06.03		CHK. 		6/5		PART NAME						
CHK.		APP. 		6/5		110 P-LOCK 3P HOUSING						

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK