
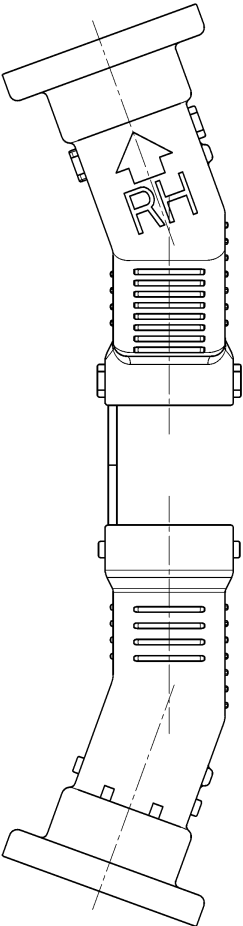
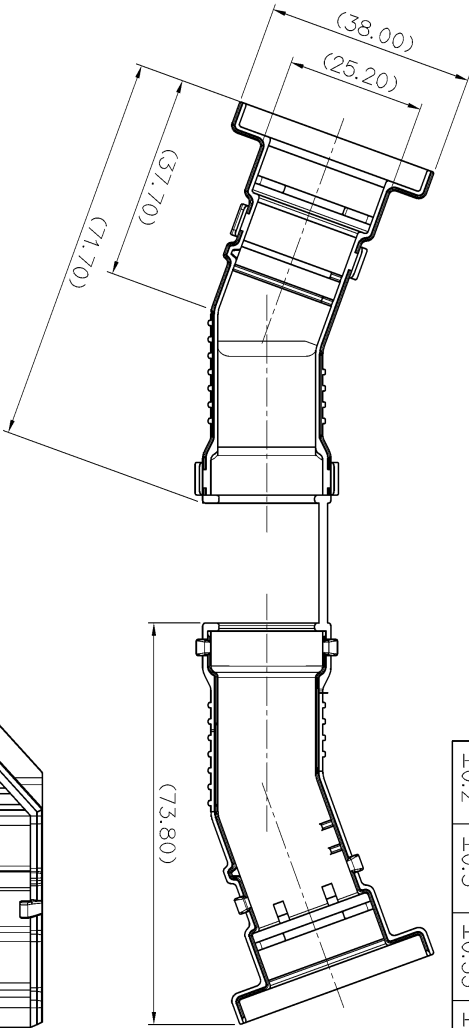
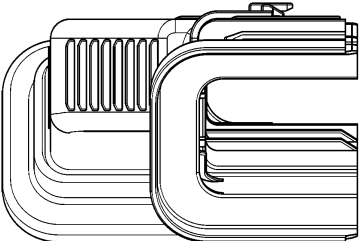
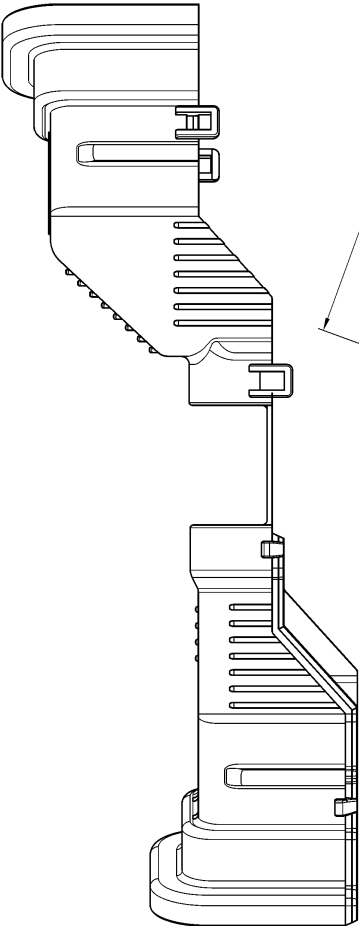


ISO VIEW

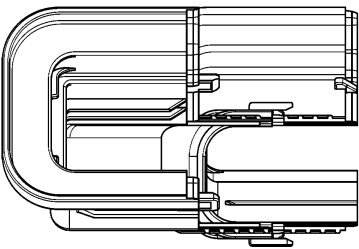

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	


주 기

- 적용 CONNECTOR : MG654391
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- APPLICABLE CONNECTOR : MG654391
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

REVISION RECORD				MATERIAL				FINISH				WIRE RANGE				INSULATION				SCALE				PART NO.			
DR.	SHIN,S.H	09.07.17	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	DR.	CHK.	APP.	DATE	WIRE RANGE	INSULATION	SCALE	PART NO.	FRONT DOOR	45M	REAR COVER	(RH)	FRONT DOOR	45M	REAR COVER	(RH)	FRONT DOOR	45M	REAR COVER	(RH)
DR.	SHIN,S.H	09.07.17	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	DR.	CHK.	APP.	DATE	WIRE RANGE	INSULATION	SCALE	PART NO.	FRONT DOOR	45M	REAR COVER	(RH)	FRONT DOOR	45M	REAR COVER	(RH)	FRONT DOOR	45M	REAR COVER	(RH)



ISSUE MARK

KET KOREA ELECTRIC

TERMINAL CO., LTD.