






MG634866

PART NO.

CUSTOMER DRAWING

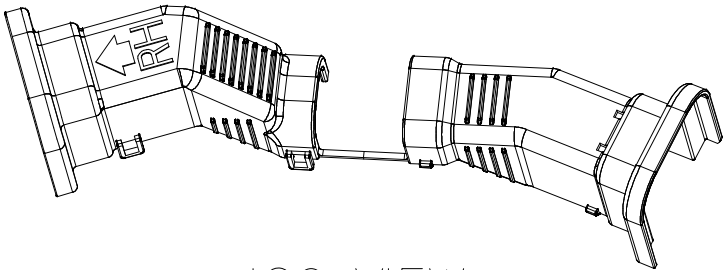


ISO VIEW

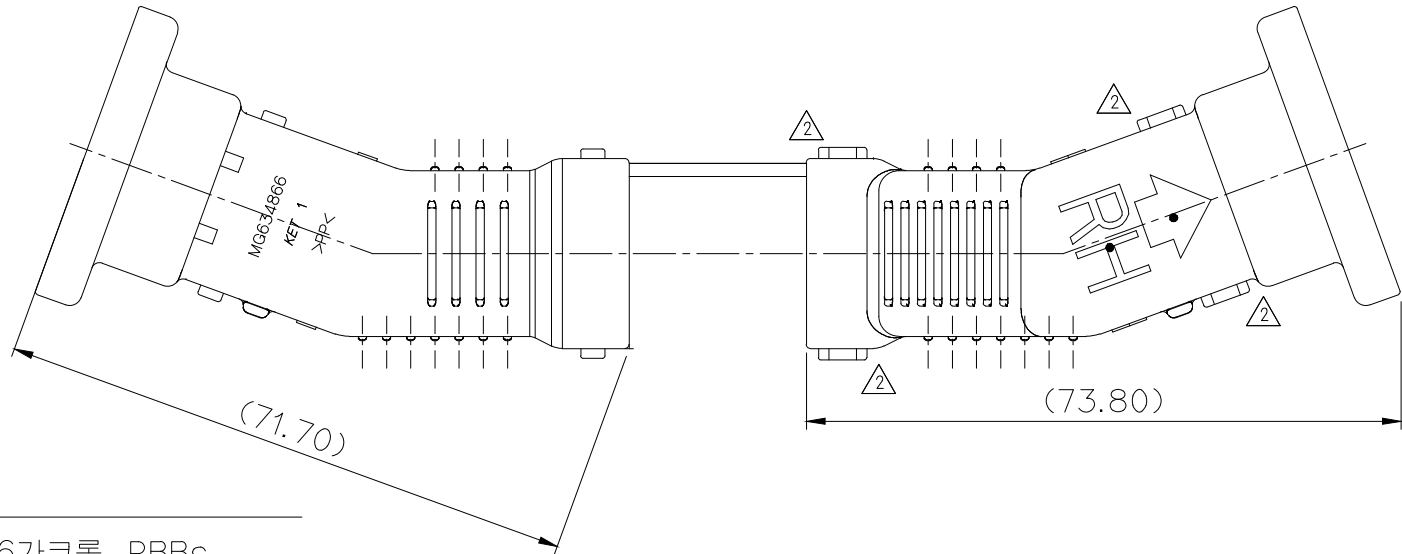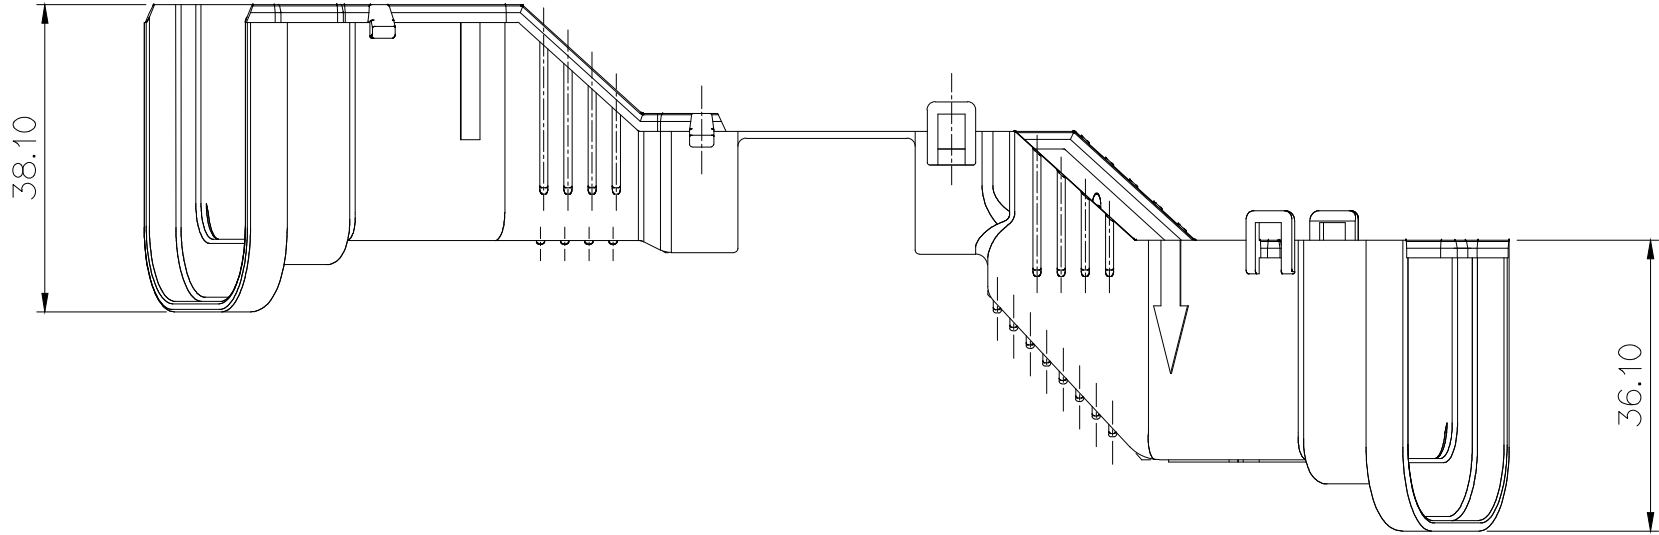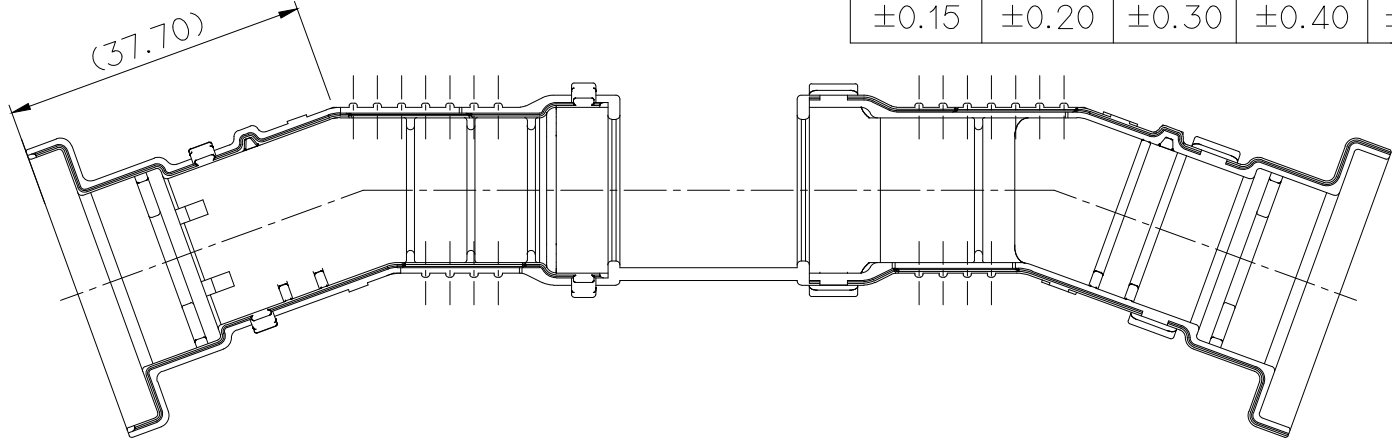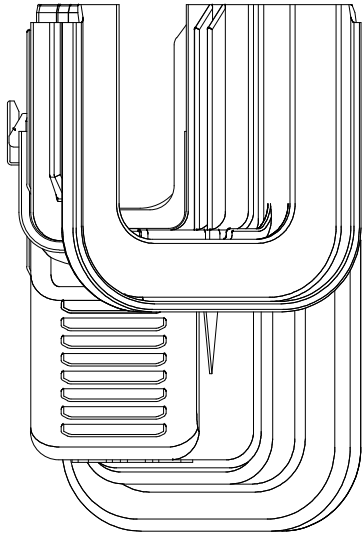

△ GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	

△	NO.	MATERIAL	COLOR
	0	PP	NATURAL
	1		RED
	2		BLUE
	3		YELLOW
*	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

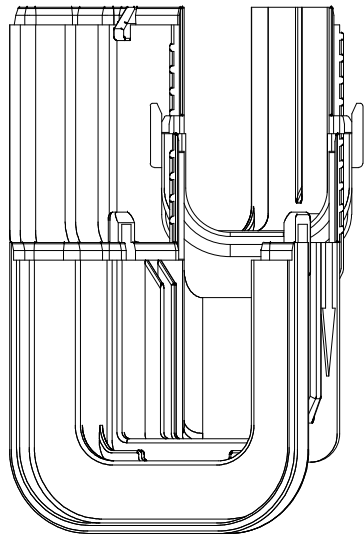

주 기

- 적용 CONNECTOR : MG654391
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- APPLICABLE TERMINAL : MG654391
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

						MATERIAL	SEE TABLE	
						FINISH	SEE TABLE	
△2	ECO-1311-165 근거	SYC	CSH	CWK	2013.11.22	WIRE RANGE		CLASS
△1	ECO-1302-048 근거 도면 재작성	YM.K	CSH	HSH	13.02.07	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1
DR.	SHIN.S.H.	'10.04.23	CHK.			PART NAME	FRONT DOOR 45M REAR COVER (RH)	
CHK.			APP.					

DIMENSIONS IN MM)