
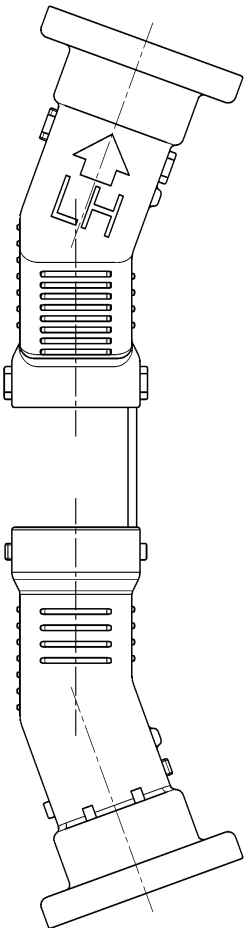
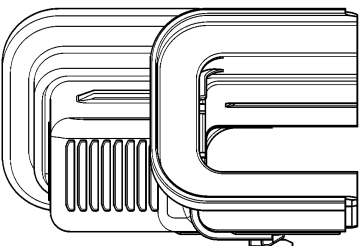
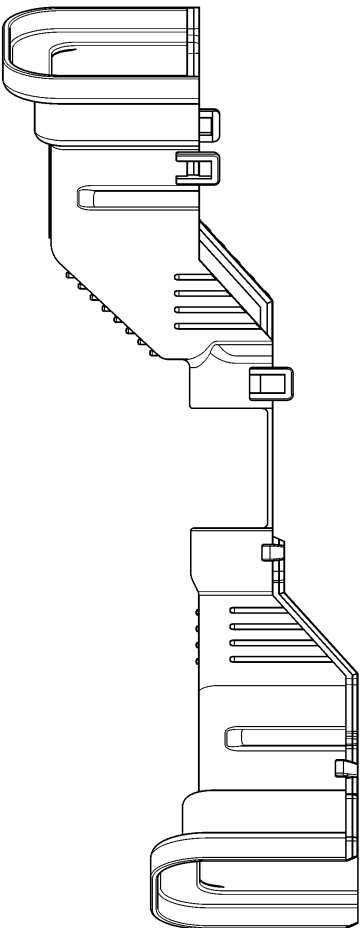
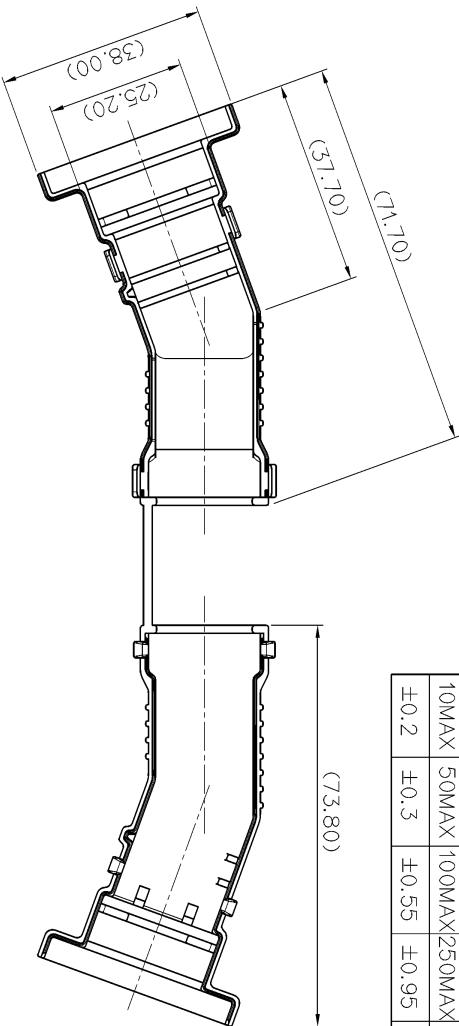


ISO VIEW

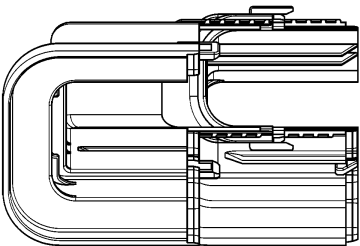

주 기

1. 적용 CONNECTOR : MG654391
2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. APPLICABLE CONNECTOR : MG654391
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

				MATERIAL	PP
				FINISH	BLACK
				WIRE RANGE	
				INSULATION	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.SHIN,S.H	'09.07.17	CHK.			
CHK		APP.			
				PART NAME	FRONT DOOR 45M REAR COVER (LH)

