

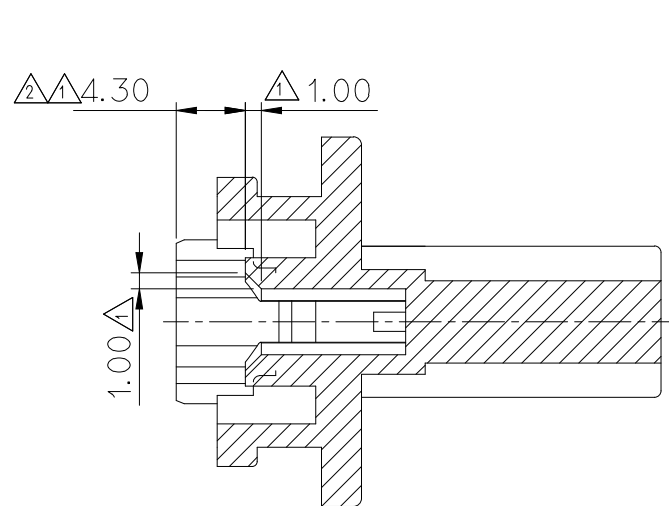
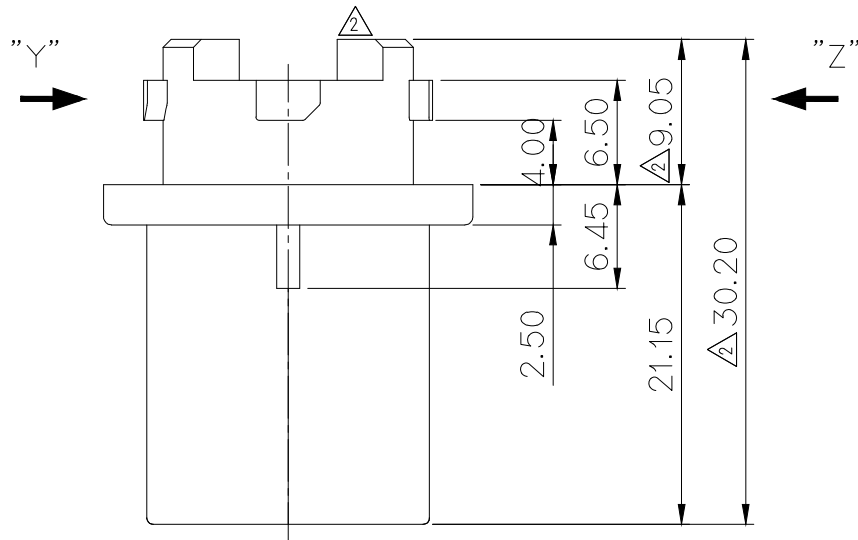
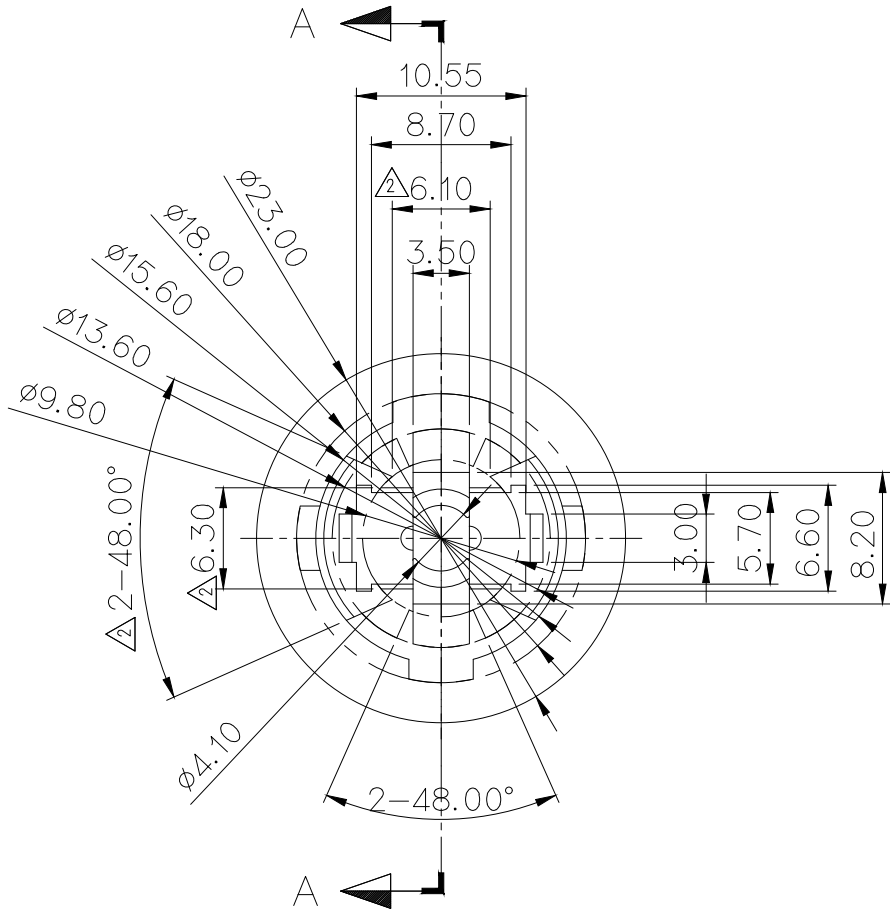


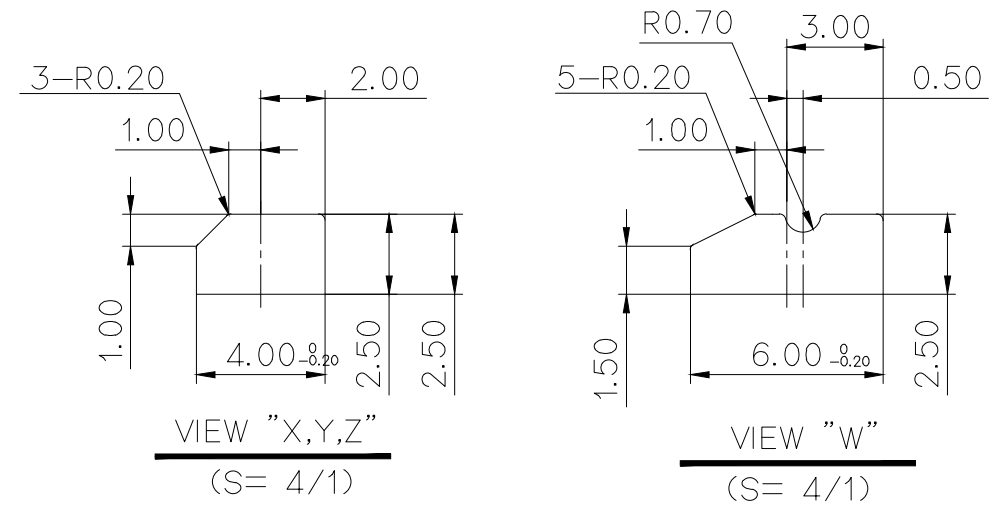


SECTION A-A

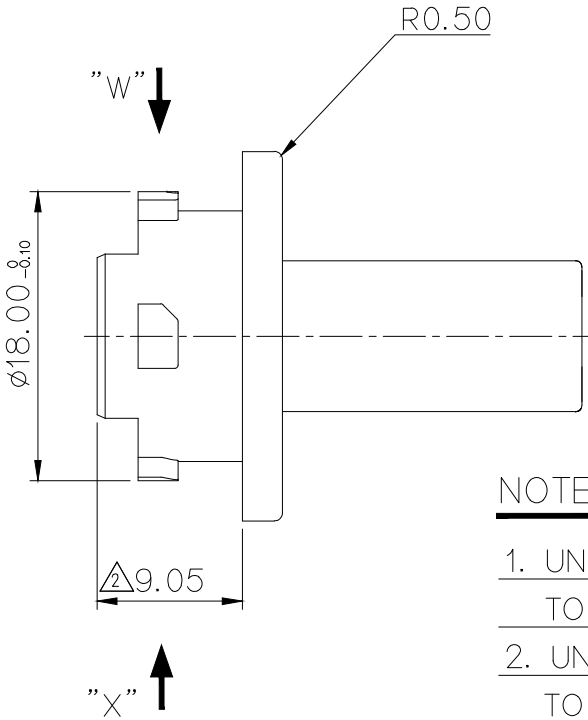

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 TERMINAL : ST780915
- 5.적용 WIRE SEAL : MG682027
- 6.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

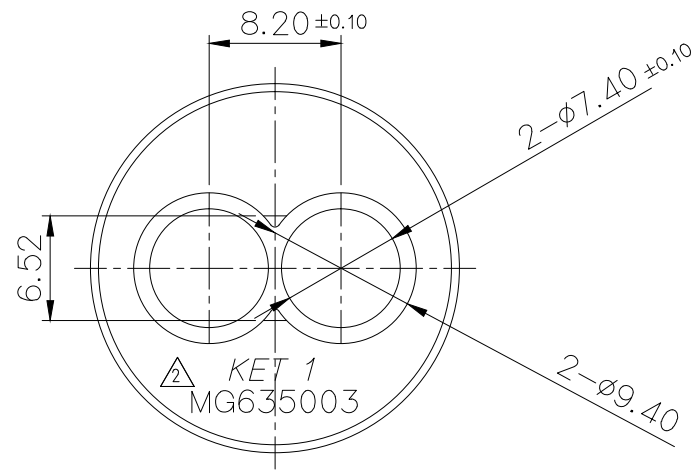

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE OF TERMINAL : ST780915
5. APPLICABLE OF WIRE SEAL : MG682027
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

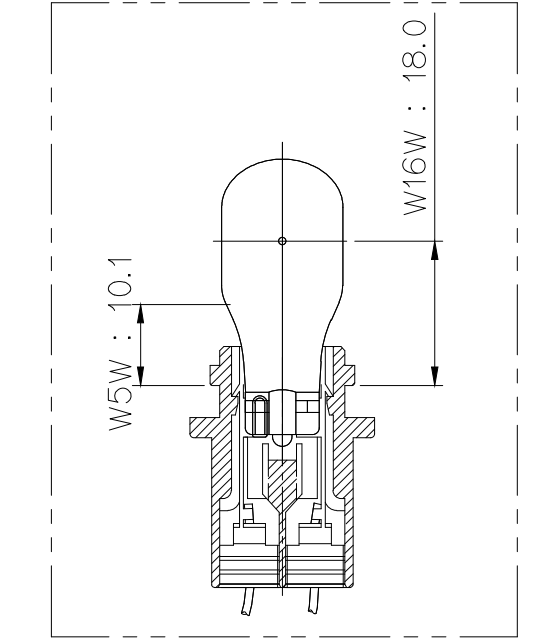

BULB HOLDER ASSY(S:1/1)

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL PA66+MR30%		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH L/GRAY			
					WIRE RANGE		CLASS	
	ECO-1604-022	근거 도면 재 작성	SSY CSH	LSY	'16.04.05	INSULATION		TYPE C70-06-151
	ECO-1407-279	근거 도면 재 작성	CJH SSH	BIN	'14.07.28	SCALE 2/1		PART NO. MG635003
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	
DR.	CYJ, '05.11.14		CHK.CJH, '06.01.19			PART NAME		
CHK.	HSW, '06.01.19		APP.KKJ, '06.01.29			BACK-UPB/H WP HS'G		