

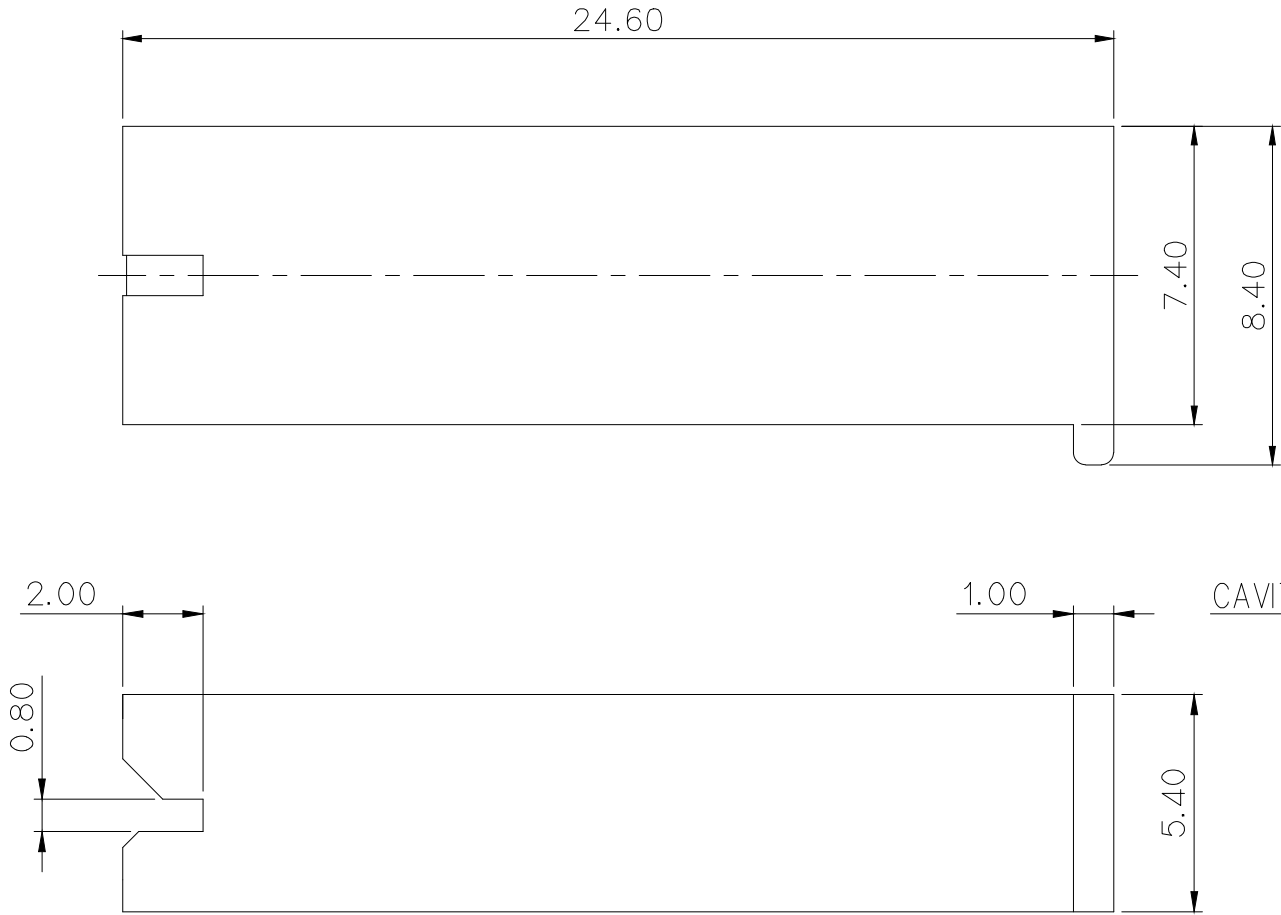


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

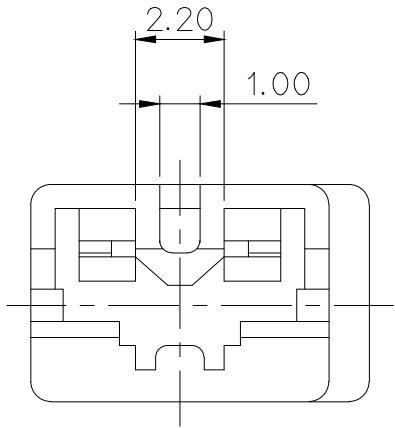

CAVITY NO & DIE MARK

KET MARK

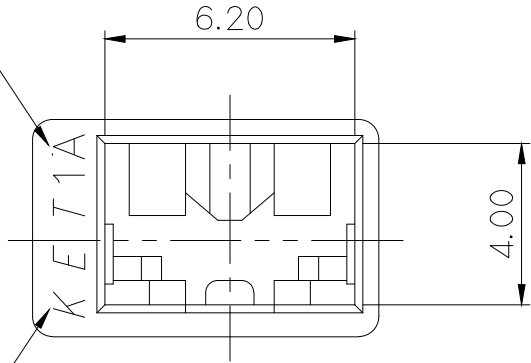

PART NO. ∗표시는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPLICABLE TERMINAL : ST730567-3, 568-3, 569-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR, WELDLINE 없을 것.
- 지시하지 않은 모든 R은 0.3R.
- 적용 TERMINAL : ST730567-3, 568-3, 569-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG635007T-∗01	
DR. LYS '17.11.01		CHK. PSH '17.11.01			PART NAME 187 P-LOCK HOUSING 1P(NEW)				
CHK. KSH '17.11.01		APP. BUC '17.11.01							

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK