

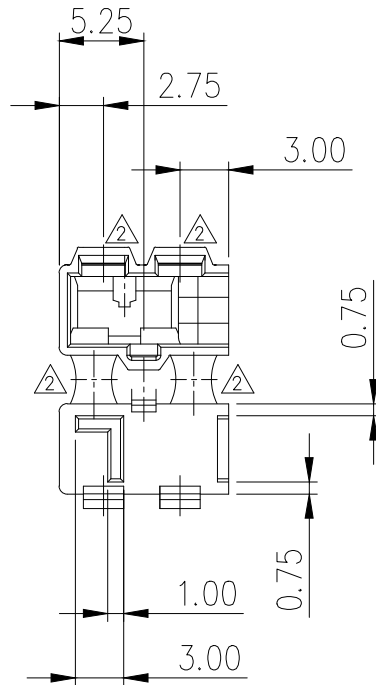
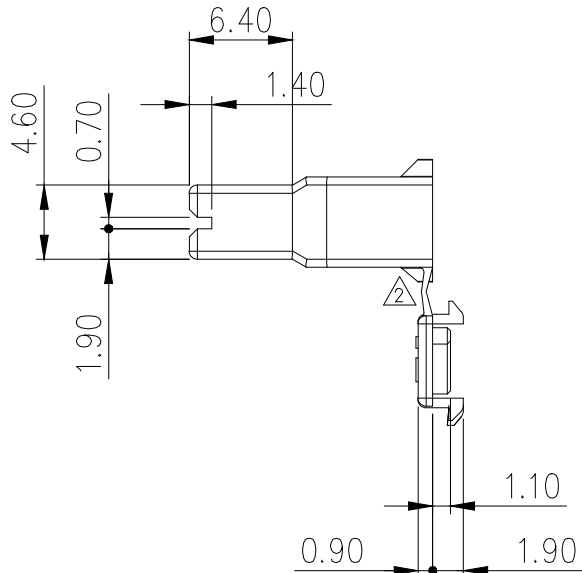
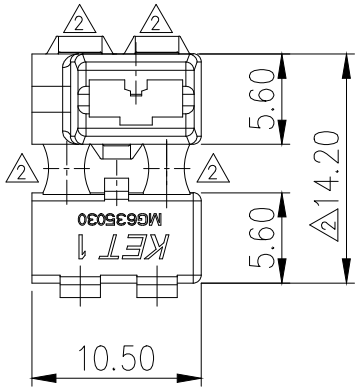
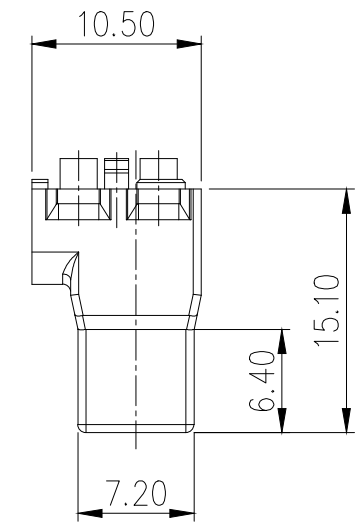


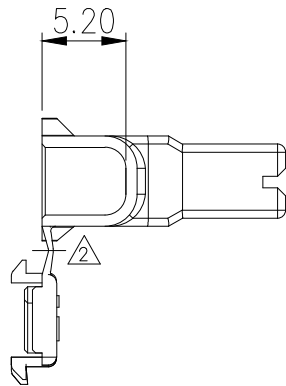

$\triangle$				
NO.	COLOR	MG635030	MG635030K	MG635030S
0	NATURAL	*	*	*
1	RED			
2	BLUE			
3	YELLOW			*
5	BLACK			

$\triangle$ GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
± 0.25	± 0.35	± 0.55	± 0.95	± 1.0	

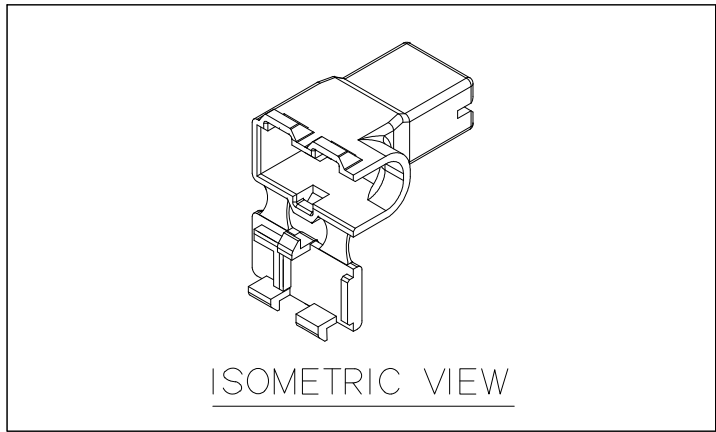

ISOMETRIC VIEW

$\triangle$		
구 분	PART NO.	MATERIAL
1	MG635030	PA66 (V0)
2	MG635030K	PA66 (V0) / GWIT
3	MG635030S	PA66 (V0) / GWIT

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731079-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST731079-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

						MATERIAL SEE TABLE		 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
△	ECO-1610-422 큰거 도면 재작성	SMG	KSH	BUC	16.10.26	FINISH △ SEE TABLE			
△	ECO-1610-286 큰거 도면 재작성	SMG	KSH	BUC	16.10.19	WIRE RANGE		CLASS .187	
△	ECO-1208-882 큰거 도면 재작성	PJM	7/13	7/13	12.08.23	INSULATION		TYPE P-LOCK	
△	설계사양변경서 S110041의거 도면 재작성	PJM	7/13	7/13	11.02.16	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. △△ SEE TABLE
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE			
DR. P.J.M '09.11.20		CHK. KSH		11/26					
CHK. 11/26		APP. 7/13		11/26		187 P-LOCK FALG 1P HS'G (HINGE)			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK