



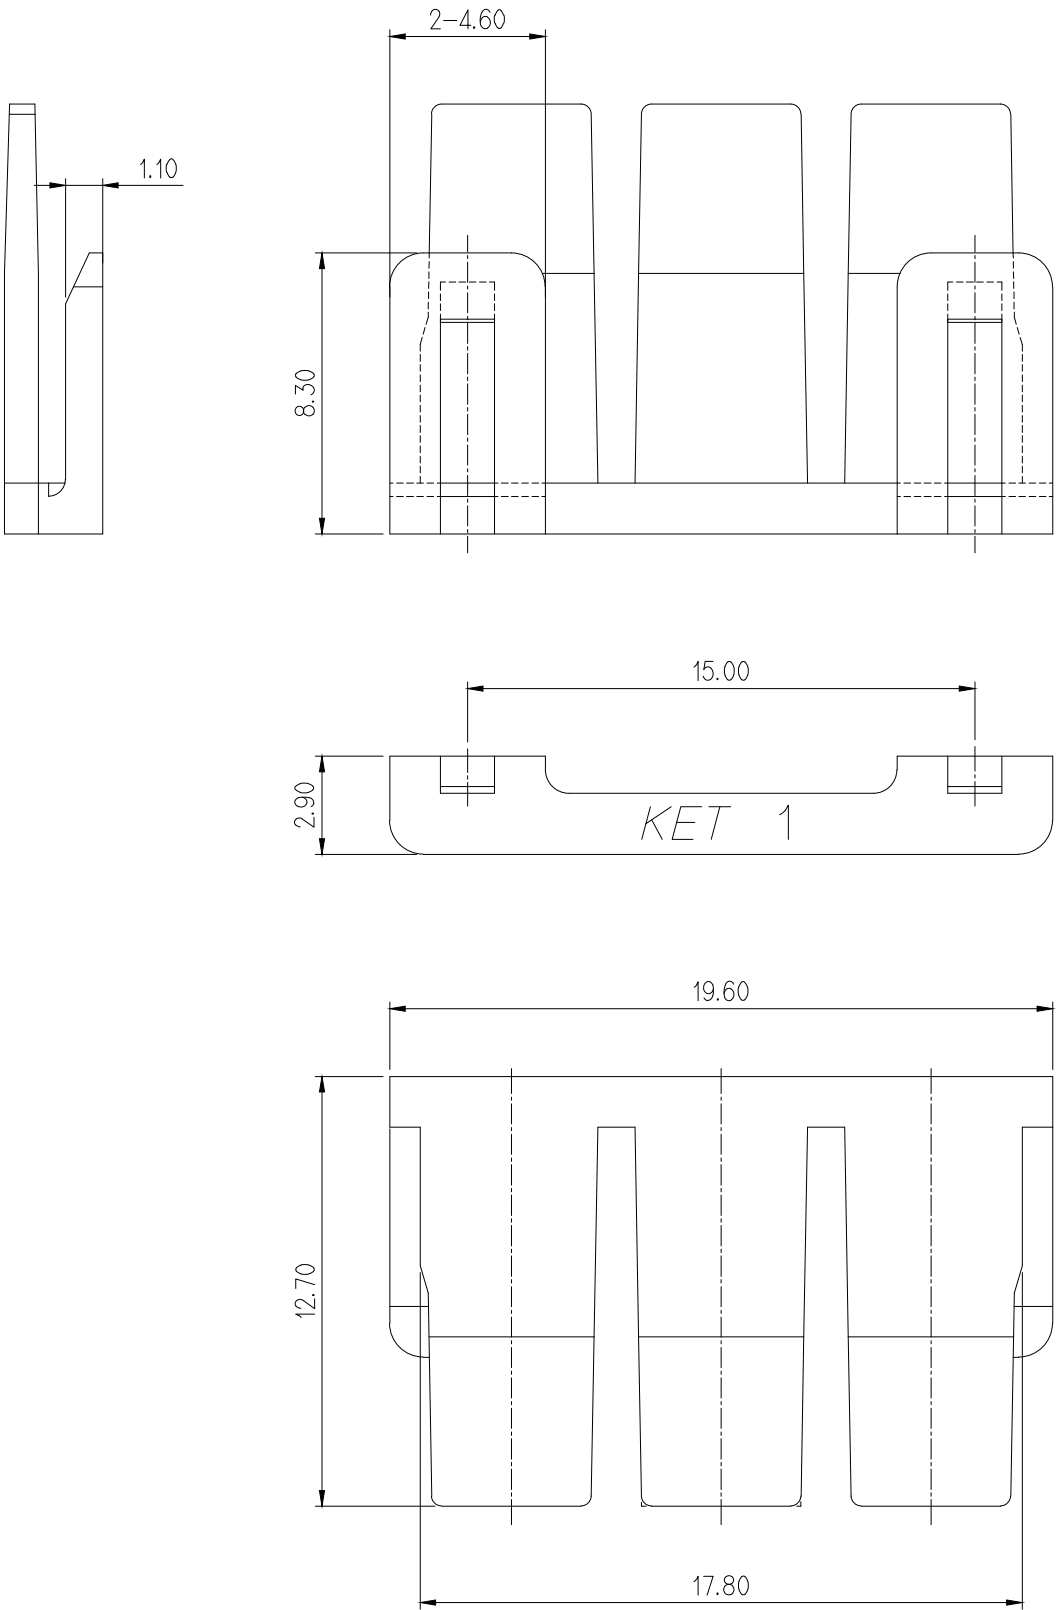

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



- 주 기
- 1.지시하지 않은 반경 R은 0.2 - 0.3로 한다.
 - 2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
 - 3.적용 ITEM HOUSING: MG615042,MG625040,41
 - 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 - 0.3 RADIUS.
 - 2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - 3. APPLICABLE HOUSING : MG615042,4,MG625040,41
 - 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

					MATERIAL PA66			KOREA ELECTRIC	
					FINISH RED			TERMINAL CO., LTD.	
					WIRE RANGE			CLASS	NEW 3220
					INSULATION			TYPE	
LTR	REVISION RECORD		DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG635043-1
DR. KSH '10.03.25			CHK.		'10.03.25	PART NAME			
CHK.			APP.		'10.03.25	NEW 3220 3P REAR-HOLDER			



ISSUE MARK